



BLACKHAWK

TRUCK & BUS TIRE CATALOG

Long Haul / Regional / On & Off Road / Off Road / Urban
REV 20/01

Tire Direct 
La nueva generación

BLACKHAWK



CONTENTS

06 BFL56	07 BTR60	08 BFR88	09 BFR65	10 BDR75	26 BAR15	27 BAM01	28 BDM12	29 BAR02	30 BAM02
11 BDL71	12 BTL66	13 BDL71W	14 BAR06	15 BAR26	31 BLO16	32 BDO89	33 BDO66	34 BDW72	35 BDR28
16 BDL65	17 BTR69	18 BFR55	19 BAM25	20 BDR77	36 BFR63	37 BDM16	38 BDR81	39 BTR96	40 BFR28
21 BDM19	22 BAM99	23 BDM10	24 BDM60	25 BDM90					



BFL56

Suitable Conditions
Long mileage trucks and passenger busses running on paved and highway road



- ✓ High wear resistance
- ✓ Long tread life
- ✓ Economical and green
- ✓ Good cost-performance



Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
								Single	Dual	A.P.
			mm	inch	mm	mm	inch	kg	kg	kPa
11R22.5	144/142L	14PR	15.5	8.25	1065	279	19.33	2800	2650	720
11R22.5	146/143L	16PR	15.5	8.25	1065	279	19.33	3000	2725	830
11R22.5	148/145L	16PR	15.5	8.25	1065	279	19.33	3150	2900	850
11R24.5	146/143L	14PR	15.5	8.25	1104	279	20.31	3000	2725	720
11R24.5	149/146L	16PR	15.5	8.25	1104	279	20.31	3250	3000	830
285/75R24.5	144/141L	14PR	15.5	8.25	1050	283	19.41	2800	2575	760
285/75R24.5	147/144L	16PR	15.5	8.25	1050	283	19.41	3075	2800	830
295/75R22.5	144/141L	14PR	15.5	9.00	1014	298	18.66	2800	2575	760
295/75R22.5	146/143L	16PR	15.5	9.00	1014	298	18.66	3000	2725	830
305/75R24.5	154/149K	18PR	15.1	9.00	1080	305	19.45	3750	3250	850



BTR60

Suitable Conditions
Medium and long mileage vehicles running on paved roads



- Long tread life and great high speed stability
Durable and wear-resistant sidewall
Cool running
Low noise emissions and reduced stone retention



Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
								Single	Dual	A.P.
			mm	inch	mm	mm	inch	kg	kg	kPa
385/65R22.5	160K	20PR	15.5	11.75	1072	389	19.45	4500		900



BFR88

Suitable Conditions
Long mileage trucks and passenger busses running on paved roads and highways



- ✓ High wear resistance
- ✓ Long tread life
- ✓ Economical and green
- ✓ Good cost-performance



SSuitable

Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
								Single	Dual	A.P.
			mm	inch	mm	mm	inch	kg	kg	kPa
11R22.5	148/145M	16PR	14.5	8.25	1054	279	19.33	3150	2900	850
11R24.5	149/146M	16PR	14.5	8.25	1104	279	20.31	3250	3000	830



BFR65

Suitable Conditions
Medium and long mileage trucks running on paved and highway roads



- ✓ High wear resistance
- ✓ Long tread life
- ✓ Economical and green
- ✓ Good cost-performance



SSuitable

Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
								Single	Dual	A.P.
			mm	inch	mm	mm	inch	kg	kg	kPa
295/80R22.5	152/149M	18PR	16	9.00	1044	298	19.17	3550	3250	900
315/60R22.5	152/148L	18PR	14.5	9.75	950	313	17.40	3550	3150	900
315/70R22.5	156/150L	18PR	15.5	9.00	1014	312	18.46	4000	3350	900
315/80R22.5	156/153L	20PR	17	9.00	1076	312	19.69	4000	3650	850
12R22.5	152/149L	18PR	17	9.00	1085	300	19.84	3550	3250	930



BDR75

Suitable Conditions
Medium and long mileage trucks running on paved and highway roads



- ✓ Excellent traction
- ✓ High wear resistance
- ✓ Tread chunking resistance



Suitable

Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
								Single	Dual	A.P.
			mm	inch	mm	mm	inch	kg	kg	kPa
245/70R19.5	144/142J	18PR 16	7.50	839	248	15.39	2800	2650	900	
295/80R22.5	152/148M	16PR 22	9.00	1044	298	19.17	3550	3150	850	
295/80R22.5	152/149M	18PR 22	9.00	1044	298	19.17	3550	3250	900	
315/70R22.5	154/150L	18PR 20	9.00	1014	312	18.46	3750	3350	900	
315/70R22.5	156/150L	18PR 20	9.00	1014	312	18.46	4000	3350	900	
315/80R22.5	156/153L	20PR 23	9.00	1076	312	19.69	4000	3650	850	
11R22.5	146/143K	16PR 20	8.25	1065	279	19.33	3000	2725	830	



BDL71

Suitable Conditions
Long mileage vehicles running on paved roads



- ✓ Excellent grip
- ✓ Excellent durability



Suitable

Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
								Single	Dual	A.P.
			mm	inch	mm	mm	inch	kg	kg	kPa
11R22.5	144/142L	14PR 24	8.25	1065	279	19.33	2800	2650	720	
11R22.5	146/143L	16PR 24	8.25	1065	279	19.33	3000	2725	830	
11R22.5	148/145L	16PR 24	8.25	1065	279	19.33	3150	2900	850	
11R24.5	146/143L	14PR 23.5	8.25	1104	279	20.31	3000	2725	720	
11R24.5	149/146L	16PR 23.5	8.25	1104	279	20.31	3250	3000	830	
285/75R24.5	144/141L	14PR 24	8.25	1050	283	19.41	2800	2575	760	
285/75R24.5	147/144L	16PR 24	8.25	1050	283	19.41	3075	2800	830	
295/75R22.5	144/141L	14PR 23.5	9.00	1014	298	18.66	2800	2575	760	
295/75R22.5	146/143L	16PR 23.5	9.00	1014	298	18.66	3000	2725	830	
305/75R24.5	154/149K	18PR 23	9.00	1080	305	19.45	3750	3250	850	



BTL66

Suitable Conditions

Medium and long mileage trucks running on paved and highway roads



- ✓ High wear resistance
- ✓ Low noise emissions
- ✓ Long tread life
- ✓ Cool running



Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
								Single	Dual	A.P.
			mm	inch	mm	mm	inch	kg	kg	kPa
11R22.5	144/142L	14PR	9.5	8.25	1065	279	19.33	2800	2650	720
11R22.5	146/143L	16PR	9.5	8.25	1065	279	19.33	3000	2725	830
11R22.5	148/145L	16PR	9.5	8.25	1065	279	19.33	3150	2900	840
11R24.5	146/143L	14PR	9.5	8.25	1104	279	20.31	3000	2725	720
11R24.5	149/146L	16PR	9.5	8.25	1104	279	20.31	3250	3000	830
285/75R24.5	144/141L	14PR	9.5	8.25	1050	283	19.41	2800	2575	760
295/75R22.5	144/141L	14PR	9.5	9.00	1014	298	18.66	2800	2575	760



BDL71W

Suitable Conditions


Long mileage vehicles running on paved roads



- ✓ Excellent grip
- ✓ Excellent durability



Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
								Single	Dual	A.P.
			mm	inch	mm	mm	inch	kg	kg	kPa
11R22.5	144/142L	14PR	24	8.25	1065	279	19.33	2800	2650	720
11R22.5	146/143L	16PR	24	8.25	1065	279	19.33	3000	2725	830
11R22.5	148/145L	16PR	24	8.25	1065	279	19.33	3150	2900	850
11R24.5	146/143L	14PR	23.5	8.25	1104	279	20.31	3000	2725	720
11R24.5	149/146L	16PR	23.5	8.25	1104	279	20.31	3250	3000	830
285/75R24.5	144/141L	14PR	24	8.25	1050	283	19.41	2800	2575	760
285/75R24.5	147/144L	16PR	24	8.25	1050	283	19.41	3075	2800	830
295/75R22.5	144/141L	14PR	23.5	9.00	1014	298	18.66	2800	2575	760
295/75R22.5	146/143L	16PR	23.5	9.00	1014	298	18.66	3000	2725	830

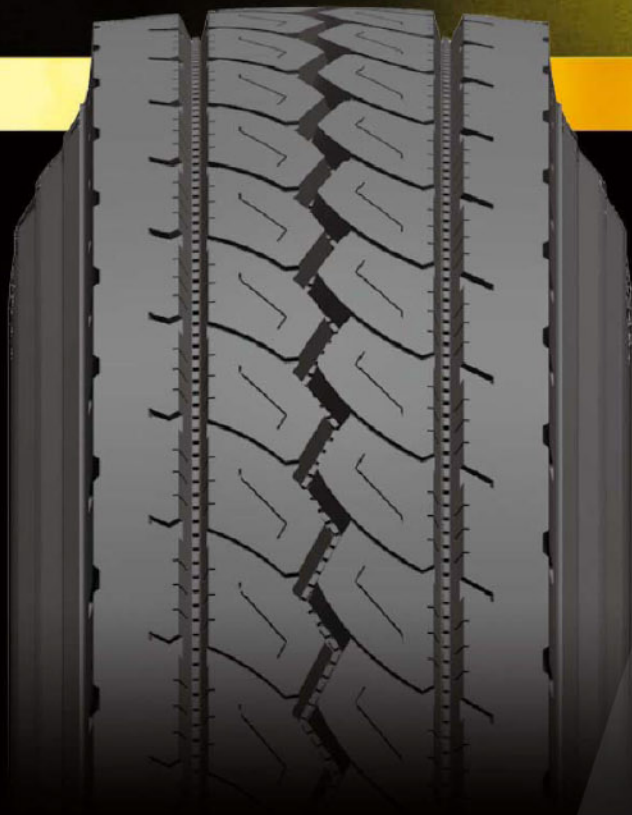

BAR06

Suitable Conditions
Medium and long mileage vehicles running on paved roads



Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
								Single	Dual	A.P.
			mm	inch	mm	mm	inch	kg	kg	kPa
12.00R24	160/157K	20PR	14.5	8.5	1226	315	22.52	4500	4125	900



BAR26

Suitable Conditions
Long mileage vehicles running on paved roads



- ✓ Excellent durability
- ✓ Cool running
- ✓ Tread chunking resistance



Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
								Single	Dual	A.P.
			mm	inch	mm	mm	inch	kg	kg	kPa
215/75R17.5	135/133L	16PR	12.5	6.00	767	211	14.17	2180	2060	865
225/70R19.5	128/126L	14PR	12.5	6.75	811	226	15.43	1800	1700	760
225/70R19.5	128/126L	16PR	12.5	6.75	811	226	15.43	1800	1700	760
225/75R17.5	129/127M	14PR	12.5	6.75	783	226	14.45	1850	1750	725
235/75R17.5	132/129M	16PR	12.5	6.75	797	233	14.69	2000	1850	830
235/75R17.5	143/141J	18PR	12.5	6.75	797	233	14.69	2725	2575	865
245/70R19.5	135/133M	16PR	13	7.50	839	248	15.39	2180	2060	830
245/70R19.5	136/134M	16PR	13	7.50	839	248	15.39	2240	2120	830
255/70R22.5	140/137M	16PR	13.5	7.50	930	255	17.13	2500	2300	830
275/70R22.5	144/141M	16PR	14.5	8.25	958	275	17.56	2800	2575	830
275/70R22.5	148/145M	16PR	14.5	8.25	958	275	17.56	3150	2900	900



BDL65

Suitable Conditions
Medium and long mileage vehicles running on paved roads



Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
			mm	inch	mm	mm	inch	Single	Dual	A.P.
315/80R22.5	156/153K	20PR	18	9.00	1076	312	19.69	4000	3650	850
	152/148	16	17	9.00	1044	298	19.17	3550	3150	850
295/80R22.5	152/149	18	17	9.00	1044	298	19.17	3550	3250	900
	152/148	16	18	9.00	1014	312	18.46	3550	3150	850
315/70R22.5	154/150	18	18	9.00	1014	312	18.46	3750	3350	900
	156/150	18	18	9.00	1014	312	18.46	4000	3350	900
315/80R22.5	156/150	18	18	9.00	1076	312	19.69	4000	3350	850
	156/153	20	18	9.00	1076	312	19.69	4000	3650	850



BTR69

Suitable Conditions
Long mileage trucks running on paved and highway roads



- ✓ Excellent durability
- ✓ Cool running



Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
			mm	inch	mm	mm	inch	Single	Dual	A.P.
385/65R22.5	160K	20PR	17.5	11.75	1072	389	19.45	4500		900



BFR55

Suitable Conditions

Long mileage trucks and passenger busses running on paved and highway roads



- ✓ High wear resistance
- ✓ Long tread life
- ✓ Economical and green
- ✓ Good cost-performance



Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
								Single	Dual	A.P.
			mm	inch	mm	mm	inch	kg	kg	kPa
11R22.5	144/142L	14PR	14.5	8.25	1065	279	19.33	2800	2650	720
11R22.5	146/143L	16PR	14.5	8.25	1065	279	19.33	3000	2725	830
11R22.5	148/145L	16PR	14.5	8.25	1065	279	19.33	3150	2900	850
11R24.5	146/143L	14PR	14.5	8.25	1104	279	20.31	3000	2725	720
11R24.5	149/146L	16PR	14.5	8.25	1104	279	20.31	3250	3000	830
215/75R17.5	135/133L	16PR	12.5	6.00	767	211	14.17	2180	2060	860
235/75R17.5	143/141L	18PR	13	6.75	797	233	14.69	2725	2575	860
285/75R24.5	144/141L	14PR	14.5	8.25	1050	283	19.41	2800	2575	760
285/75R24.5	147/144L	16PR	14.5	8.25	1050	283	19.41	3075	2800	830
295/75R22.5	144/141L	14PR	14.5	9.00	1014	298	18.66	2800	2575	760
295/75R22.5	146/143L	16PR	14.5	9.00	1014	298	18.66	3000	2725	830



BAM25

Suitable Conditions

Medium and long mileage trucks running on paved roads and highways



- ✓ High wear resistance
- ✓ Low noise emissions
- ✓ Long tread life
- ✓ Cool running



Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
								Single	Dual	A.P.
			mm	inch	mm	mm	inch	kg	kg	kPa
10.00R20	149/146K	18PR	15	7.5	1054	278	19.13	3250	3000	930
12R22.5	152/149L	18PR	15.5	9.00	1085	300	19.84	3350	3250	930



BDR77

Suitable Conditions
Medium and long mileage trucks running on paved and highway roads



Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
								Single	Dual	A.P.
			mm	inch	mm	mm	inch	kg	kg	kPa
10R22.5	141/139M	14PR	18.5	7.50	1019	254	18.74	2575	2430	790
11R22.5	144/142L	14PR	20	8.25	1065	279	19.33	2800	2650	720
11R22.5	146/143L	16PR	20	8.25	1065	279	19.33	3000	2725	830
11R24.5	146/143L	14PR	20	8.25	1104	279	20.31	3000	2725	720
11R24.5	149/146L	16PR	20	8.25	1104	279	20.31	3250	3000	830
255/70R22.5	140/137L	16PR	14.5	7.50	930	255	17.13	2500	2300	830
285/75R24.5	144/141L	14PR	20	8.25	1050	283	19.41	2800	2575	760
285/75R24.5	147/144L	16PR	20	8.25	1050	283	19.41	3075	2800	830
295/75R22.5	144/141L	14PR	20	9.00	1014	298	18.66	2800	2575	760
295/75R22.5	146/143L	16PR	20	9.00	1014	298	18.66	3000	2725	830



BDM19

Suitable Conditions
Medium and short mileage vehicles running on paved and unpaved roads



Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
								Single	Dual	A.P.
			mm	inch	mm	mm	inch	kg	kg	kPa
10.00R20	149/146K	18PR	19	7.5	1054	278	19.13	3250	3000	930
11.00R20	152/149K	18PR	20	8.0	1085	293	19.65	3550	3250	930
12.00R24	160/157K	20PR	20	8.5	1238	315	22.52	4500	4125	900
265/70R19.5	143/141K	18PR	15	7.50	867	262	15.83	2725	2575	900



BAM99

Suitable Conditions
Medium and long mileage vehicles running on paved roads



Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
								Single	Dual	A.P.
			mm	inch	mm	mm	inch	kg	kg	kPa
385/65R22.5	158K	18PR	16.5	11.75	1072	389	19.45	4250		830
385/65R22.5	160K	20PR	16.5	11.75	1072	389	19.45	4500		900
425/65R22.5	165K	20PR	17.5	12.25	1124	422	20.28	5150		830



BDM10

Suitable Conditions
Medium and short mileage vehicles running on paved and unpaved roads



- ✓ Excellent traction
- ✓ Excellent durability
- ✓ Tread chalking resistance



Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
								Single	Dual	A.P.
			mm	inch	mm	mm	inch	kg	kg	kPa
13R22.5	154/151K	18PR	22.5	9.75	1136	320	20.51	3750	3450	830
13R22.5	156/150J	20PR	22.5	9.75	1136	320	20.51	4000	3350	875
315/80R22.5	156/153K	20PR	21.5	9.00	1076	312	19.69	4000	3650	850



BDM60

Suitable Conditions

Medium and short mileage vehicles running on paved and unpaved roads



- ✓ Excellent traction
- ✓ Tread chunking resistance
- ✓ Cut resistant



Suitable

Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
								Single	Dual	A.P.
			mm	inch	mm	mm	inch	kg	kg	kPa
7.50R16LT	122/118L	14PR	16	6.00G	805	215	14.76	1500	1320	770



BDM90

Suitable Conditions

Medium and short mileage vehicles running on paved and unpaved roads



Suitable

Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
								Single	Dual	A.P.
			mm	inch	mm	mm	inch	kg	kg	kPa
11R22.5	146/143K	16PR	24.5	8.25	1065	279	19.33	3000	2725	830
11R24.5	149/146K	16PR	24.5	8.25	1104	279	20.31	3250	3000	830



BAR15

Suitable Conditions
Medium and short mileage vehicles running on paved and unpaved roads



- ✓ Cool running
- ✓ Excellent durability



Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
								Single	Dual	A.P.
			mm	inch	mm	mm	inch	kg	kg	kPa
7.50R16LT	122/118L	14PR	13	6.00G	805	215	14.76	1500	1320	770



BAM01

Suitable Conditions
Medium and long mileage trucks running on paved and unpaved roads



- ✓ Cool running
- ✓ Excellent durability



Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
								Single	Dual	A.P.
			mm	inch	mm	mm	inch	kg	kg	kPa
7.00R16LT	118/114L	14	11.5	5.50F	775	200	14.25	1320	1180	770
7.50R16LT	122/118L	14	12.5	6.00G	805	215	14.76	1500	1320	770
8.25R16LT	126/122L	14	13.5	6.50H	865	235	15.63	1700	1500	670
8.25R16LT	128/124L	16	13.5	6.50H	865	235	15.63	1800	1600	770
8.25R20	139/137K	16	13.5	6.5	974	236	17.8	2430	2300	930
9.00R20	144/142K	16	15	7.0	1019	259	18.54	2800	2650	900
10.00R20	149/146K	18	16	7.5	1054	278	19.13	3250	3000	930
11.00R20	150/147K	16	16.5	8.0	1085	293	19.65	3550	3250	930
11.00R20	152/149K	18	16.5	8.0	1085	293	19.65	3550	3250	930
12.00R20	154/151K	18	17	8.5	1125	315	20.31	3750	3450	830
11R22.5	146/143M	16	16	8.25	1065	279	19.33	3000	2725	830
11R22.5	148/145M	16	16	8.25	1065	279	19.33	3150	2900	850
11R24.5	149/146M	16	16	8.25	1104	279	20.31	3250	3000	830
13R22.5	154/150L	18	16	9.75	1124	320	20.51	3750	3350	830
295/80R22.5	152/149L	18	17.5	9.00	1044	298	19.17	3550	3250	900
315/80R22.5	156/153K	20	16	9.00	1076	312	19.69	4000	3650	850
12R22.5	152/149	18	17.5	9.00	1085	300	19.84	3550	3250	930
7.00R16LT	118/114	14	11.5	5.50F	775	200	14.25	1320	1180	770
7.50R16LT	122/118	14	12.5	6.00G	805	215	14.76	1500	1320	770
8.25R16LT	128/124	16	13.5	6.50H	855	235	15.63	1800	1600	770
9.00R20	141/139	14	15	7.0	1019	259	18.54	2575	2430	790
	144/142	16	15	7.0	1019	259	18.54	2800	2650	900
11.00R20	150/147	16	16.5	8.0	1085	293	19.65	3350	3075	830
	152/149	18	16.5	8.0	1085	293	19.65	3550	3250	930
12.00R20	154/151	18	17	8.50	1125	315	20.31	3750	3450	830
11R22.5	148/145	16	16	8.25	1059	279	19.33	3150	2900	850
13R22.5	154/150	18	16	9.75	1124	320	20.51	3750	3350	850
	156/150	20	16	9.75	1124	320	20.51	4000	3350	900
315/80R22.5	156/153	20	16	9.00	1076	312	19.69	4000	3650	850



BDM12

Suitable Conditions
Medium and short mileage vehicles running on paved and unpaved roads



- ✓ Excellent durability
- ✓ High strength



Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
			mm	inch	mm	mm	inch	Single	Dual	A.P.
11.00R20	150/147K	16PR 18	8.0	1096	293	19.65	3350	3075	830	



BAR02

Suitable Conditions
Medium and long mileage vehicles running on paved roads



Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
			mm	inch	mm	mm	inch	Single	Dual	A.P.
11R22.5	146/143K	16PR 18	8.25	1065	279	19.33	3000	2725	830	
11R24.5	149/146K	16PR 18	8.25	1104	279	20.31	3250	3000	830	
255/70R22.5	140/137L	16PR 17.5	7.50	930	255	17.13	2500	2300	830	
275/70R22.5	148/145K	16PR 16	8.25	958	275	17.56	3150	2900	900	
275/70R22.5	148/145K	18PR 16	8.25	958	275	17.56	3150	2900	900	
315/80R22.5	161/157G	20PR 17	9.00	1076	312	19.69	4625	4125	900	
295/80R22.5	152/149L	18PR 17.5	9.00	1044	298	19.17	3550	3250	900	
315/80R22.5	156/153K	20PR 16	9.00	1076	312	19.69	4000	3650	850	



BAM02

Suitable Conditions
Medium and long mileage trucks running on paved and unpaved roads



Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
								Single	Dual	A.P.
			mm	inch	mm	mm	inch	kg	kg	kPa
11.00R20	150/147K	16PR	17	8.0	1085	293	19.65	3350	3075	830
295/80R22.5	152/149L	18PR	16	9.00	1044	298	19.17	3550	3250	900



BLO16

Suitable Conditions



- ✓ Excellent traction
- ✓ Tread chunking resistance



Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
								Single	Dual	A.P.
			mm	inch	mm	mm	inch	kg	kg	kPa
11.00R20	150/147K	16PR	21	8.0	1096	293	19.65	3350	3075	830
11.00R20	152/149K	18PR	21	8.0	1096	293	19.65	3550	3250	930



BDO89

Suitable Conditions
Short mileage vehicles running on unpaved roads



Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
								Single	Dual	A.P.
			mm	inch	mm	mm	inch	kg	kg	kPa
11R22.5	146/143G	16PR	23.5	8.25	1065	279	19.33	3000	2725	830
11R24.5	149/146G	16PR	23.5	8.25	1104	279	20.31	3250	3000	830
12R22.5	152/149G	18PR	24.5	9.00	1085	300	19.84	3550	3250	930
295/80R22.5	152/149J	18PR	23.5	9.00	1044	298	19.17	3550	3250	900



BDO66

Suitable Conditions
Short mileage vehicles running on unpaved roads



- ✓ Excellent traction
- ✓ Excellent durability
- ✓ High scrub resistance



Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
								Single	Dual	A.P.
			mm	inch	mm	mm	inch	kg	kg	kPa
12.00R24	160/157D	20PR	31	8.5	1238	315	22.52	4500	4125	900



BDW72

Suitable Conditions
Running on paved roads in winter weather



- ✓ Improved rigidity, better grip and traction
- ✓ Safer driving experience in winter weather
- ✓ Improving driving ability in winter weather



Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
			mm	inch	mm	mm	inch	Single	Dual	A.P.
11R22.5	146/143L	16PR	21	8.25	1065	279	19.33	3000	2725	830
11R24.5	149/146L	16PR	21.5	8.25	1104	279	20.31	3250	3000	830



BDR28

Suitable Conditions
Running on paved roads in winter weather



- ✓ Effectively improve traction
- ✓ Improving scrubbing resistance
- ✓ Improve driving safety



Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
			mm	inch	mm	mm	inch	Single	Dual	A.P.
225/70R19.5	128/126L	14PR	16.5	6.75	811	226	15.43	1800	1700	760
245/70R19.5	135/133L	16PR	16.5	7.50	839	248	15.39	2180	2060	860



BFR63

- ✓ High scrub resistance
- ✓ Cool running
- ✓ Low noise emissions
- ✓ Long tread life



Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
			mm	inch	mm	mm	inch	Single	Dual	A.P.
								kg	kg	kPa
11R22.5	148/145M	16PR	15.5	8.25	1054	279	19.33	3150	2900	850



BDM16

- ✓ High durability
- ✓ High scrub resistance



Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
			mm	inch	mm	mm	inch	Single	Dual	A.P.
								kg	kg	kPa
13R22.5	154/151K	18PR	20	9.75	1124	320	20.51	3750	3450	830



BDR81

Drive position tire suitable for medium and long-distance travel on normal road applications.
Meticulously spaced tread block pattern improves traction.
Overall tread pattern design allows for even ground distribution pressure which offers greater handling stability.
Deepened pattern designed with greater wear and tear resistant rubber compounding improves tire mileage.

TIRE FEATURES:

- ☑ Strengthened shoulder ribs and groove ribs designed between tread blocks improve tear resistance and promote even wear.
- ☑ Open shoulder and meticulously spaced block designs improve traction and heat dissipation.
- ☑ Optimized contour design and widened tread offer excellent tire mileage.
- ☑ Material distribution and enhanced strength belts improve overall safety.



Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
								Single	Dual	A.P.
			mm	inch	mm	mm	inch	kg	kg	kPa
295/80R22.5	152/149	18	20.5	9.00	1044	298	19.17	3550	3250	900
315/80R22.5	156/153	20	19.5	9.00	1076	312	19.69	4000	3650	850



BTR96

The BTR96 is a low section tire designed to replace the traditional double-tire style. The special tread rubber design allows the tire to run cool. Strengthened design improves driving safety.



Features & Benefits:

- Small grooves allow the tire to run cool and provide better grip to improve skid resistance.
- Closed-shoulder design enhances tread wear resistance and effectively uneven wear.
- Zigzagged grooves reduce stone retention.
- Super wide running surface, shoulder design, and special tread formula improve tread life.

Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
								Single	Dual	A.P.
			mm	inch	mm	mm	inch	kg	kg	kPa
445/45R19.5	160	20	13	15.00	895	446	16.46	4500		900
435/50R19.5	160	20	12.5	14.00	931	438	16.65	4500		900
385/65R22.5	160	20	15.5	11.75	1072	389	19.45	4500		900



BFR28

The BFR28 is suitable for mid to long distance trucks and busses traveling on highways and normal roads. Four main tread grooves offer great handling stability and driving comfort. The balanced shoulder design improves heat dissipation and while also providing great high speed performance. Advanced tread wear formula increase scrub resistance.

Features & Benefits:

- Fine grooves located in the ribs provide good heat dissipation, strong grip, and improved skid resistance.
- The optimized tread arc design produces low rolling resistance and enhances fuel efficiency.
- Four pattern grooves improve handling stability and driving comfort.
- The shoulder groove design is optimized to improve heat dissipation and reduce irregular shoulder wear.



Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.		
								Single kg	Dual kg	A.P. kPa
295/80R22.5	152/148	16	14.5	9.00	1044	298	19.17	3550	3150	850



Blvd. Campestre No. 72
Col. Casa Blanca, León, Gto.
C.P. 37170



+52 (477) 718.09.21
01800 000TIRE (8473)



info@tiredirect.com.mx
www.tiredirect.com.mx



Tire Direct



Tire Direct

BLACKHAWK

TRUCK & BUS TIRE CATALOG