

**BLACKHAWK  
TIRE**

**BLACKHAWK**

**Tire Direct**  
*La nueva generación*



TIRE DIRECT



/TIRE\_DIRECT



/TIREDIRECTMX



TIRE DIRECT

# **RADIAL TRUCK TIRES CATALOG**

Long Haul / Regional / On & OFF Road / Off Road / Winter

# CONTENTS

## LONG HAUL

---

BFL56.....03	BDL73.....07
BDL65.....04	BTL63.....08
BDL71.....05	BTL66.....09
BDL71W.....06	

## REGIONAL

---

BFR11.....10	BAR67.....22
BFR21.....11	BDR01.....23
BFR28.....12	BDR28.....24
BFR29.....13	BDR72.....25
BFR49.....14	BDR75.....26
BFR55.....15	BDR77.....27
BFR63.....16	BDR78.....28
BFR65.....17	BDR81.....29
BFR68.....18	BTR55.....30
BFR88.....19	BTR60.....31
BAR26.....20	BTR96.....32
BAR27.....21	

## ON&OFF ROAD

---

BAM01.....33	BDM12.....46
BAM01A.....34	BDM16.....47
BAM02.....35	BDM19.....48
BAM03.....36	BDM26A.....49
BAM04.....37	BDM60.....50
BAM05.....38	BDM70.....51
BAM25.....39	BDM77.....52
BAM86.....40	BDM79.....53
BAM99.....41	BDM82.....54
BAR02.....42	BDM90.....55
BAR06.....43	BDM91.....56
BAR15.....44	BDM96.....57
BDM10.....45	BTM26.....58

## OFF ROAD

---

BDO16.....59	BDO25.....61
BDO17.....60	BDO89.....62

## WINTER

---

BDW62.....63	BDW72.....64
--------------	--------------



## BFL56

### Suitable Conditions

Long mileage trucks and passenger busses running on paved and highway roads.



Suitable

- High wear resistance.
- Improved fuel economy.



## BDL65

### Suitable Conditions

Long mileage trucks and passenger busses running on paved and highway roads.



Suitable

- Central main groove design improves handling and driving comfort.
- Tread and open shoulder design improve traction and grip.
- Wide running surface effectively improves ground pressure distribution for greater traction.
- Sipe design effectively reduces noise emissions.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN/VN	11R22.5	144/142L	14	15.5	8.25	1059	279	19.33	2800	2650	720	105
CN/VN	11R22.5	146/143L	16	15.5	8.25	1059	279	19.33	3000	2725	830	120
CN	11R22.5	148/145L	16	15.5	8.25	1059	279	19.33	3150	2900	850	123
CN/VN	11R24.5	146/143L	14	15.5	8.25	1110	279	20.31	3000	2725	720	105
CN/VN	11R24.5	149/146L	16	15.5	8.25	1110	279	20.31	3250	3000	830	120
CN/VN	285/75R24.5	144/141L	14	15.5	8.25	1056	283	19.41	2800	2575	760	110
CN/VN	285/75R24.5	147/144L	16	15.5	8.25	1056	283	19.41	3075	2800	830	120
CN/VN	295/75R22.5	144/141L	14	15.5	9.00	1020	298	18.66	2800	2575	760	110
CN/VN	295/75R22.5	146/143L	16	15.5	9.00	1020	298	18.66	3000	2725	830	120
CN	305/75R24.5	154/149K	18	15.1	9.00	1080	305	19.92	3750	3250	850	123

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
VN	295/80R22.5	152/148M	16	17.0	9.00	1044	298	19.17	3550	3150	850	125
VN	295/80R22.5	152/149L	18	17.0	9.00	1044	298	19.17	3550	3250	900	130
VN	315/70R22.5	152/148M	16	18.0	9.00	1014	312	18.46	3550	3150	850	123
VN	315/70R22.5	154/150L	18	18.0	9.00	1014	312	18.46	3750	3350	900	130
VN	315/70R22.5	156/150L	18	18.0	9.00	1014	312	18.46	4000	3350	900	130
VN	315/80R22.5	156/150L	18	18.0	9.00	1076	312	19.69	4000	3350	850	125
CN/VN	315/80R22.5	156/153K	20	18.0	9.00	1076	312	19.69	4000	3650	850	125



## BDL71

### Suitable Conditions

Long mileage trucks and passenger busses running on paved and highway roads.



Suitable

- Excellent grip.
- Excellent durability.



## BDL71W

### Suitable Conditions

Long mileage trucks and passenger busses running on paved and highway roads.



Suitable

- Excellent grip.
- Excellent durability.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN/VN	11R22.5	144/142L	14	23.5	8.25	1065	279	19.33	2800	2650	720	105
CN/VN	11R22.5	146/143L	16	23.5	8.25	1065	279	19.33	3000	2725	830	120
CN/VN	11R22.5	148/145L	16	23.5	8.25	1065	279	19.33	3150	2900	850	123
CN/VN	11R24.5	146/143L	14	23.5	8.25	1116	279	20.31	3000	2725	720	105
CN/VN	11R24.5	149/146L	16	23.5	8.25	1116	279	20.31	3250	3000	830	120
CN/VN	285/75R24.5	144/141L	14	23.5	8.25	1062	283	19.41	2800	2575	760	110
CN/VN	285/75R24.5	147/144L	16	23.5	8.25	1062	283	19.41	3075	2800	830	120
CN/VN	295/75R22.5	144/141L	14	23.5	9.00	1026	298	18.66	2800	2575	760	110
CN/VN	295/75R22.5	146/143L	16	23.5	9.00	1026	298	18.66	3000	2725	830	120
CN	305/75R24.5	154/149K	18	22.5	9.00	1080	305	19.92	3750	3250	850	123

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
VN	11R22.5	144/142L	14	23.5	8.25	1065	279	19.33	2800	2650	720	105
VN	11R22.5	146/143L	16	23.5	8.25	1065	279	19.33	3000	2725	830	120
VN	11R22.5	148/145L	16	23.5	8.25	1065	279	19.33	3150	2900	850	123
VN	11R24.5	149/146L	16	23.5	8.25	1116	279	20.31	3250	3000	830	120
VN	11R24.5	146/143L	14	23.5	8.25	1116	279	20.31	3000	2725	720	105
VN	285/75R24.5	144/141L	14	23.5	8.25	1062	283	19.41	2800	2575	760	110
VN	285/75R24.5	147/144L	16	23.5	8.25	1062	283	19.41	3075	2800	830	120
VN	295/75R22.5	146/143L	16	23.5	9.00	1026	298	18.66	3000	2725	830	120
VN	295/75R22.5	144/141L	14	23.5	9.00	1026	298	18.66	2800	2575	760	110



## BDL73

### Suitable Conditions

Long mileage trucks and passenger busses running on paved and highway roads.



Suitable

- Excellent grip.
- Excellent durability.



## BTL63

### Suitable Conditions

Long mileage trucks and passenger busses running on paved and highway roads.



Suitable

- Excellent grip.
- Excellent durability.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
VN	445/50R22.5	161L	20	19.0	14.00	1018	445	18.54	4625		830	120

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
VN	445/50R22.5	161M	20	10.0	14.00	1018	445	18.54	4625		830	120



## BTL66

### Suitable Conditions

Long mileage trucks and passenger busses running on paved and highway roads.



Suitable

- High wear resistance.
- Low noise emissions.
- Long tread life.
- Improved heat dissipation.



## BFR11

### Suitable Conditions

Medium and long mileage vehicles running on paved roads.



Suitable

- Great wet-skid resistance and handling.
- Improved heat dissipation.
- Closed shoulder design promotes even wear.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN/VN	11R22.5	144/142L	14	9.5	8.25	1054	279	19.33	2800	2650	720	105
CN/VN	11R22.5	146/143L	16	9.5	8.25	1054	279	19.33	3000	2725	830	120
CN	11R22.5	148/145L	16	9.5	8.25	1054	279	19.33	3150	2900	850	123
CN/VN	11R24.5	146/143L	14	9.5	8.25	1104	279	20.31	3000	2725	720	105
CN/VN	11R24.5	149/146L	16	9.5	8.25	1104	279	20.31	3250	3000	830	120
CN/VN	285/75R24.5	144/141L	14	9.5	8.25	1050	283	19.41	2800	2575	760	110
VN	285/75R24.5	147/144L	16	9.5	8.25	1050	283	19.41	3075	2800	830	120
CN/VN	295/75R22.5	144/141L	14	9.5	9.00	1014	298	18.66	2800	2575	760	110
VN	295/75R22.5	146/143L	16	9.5	9.00	1014	298	18.66	3000	2725	830	120

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
VN	6.50R16LT	110/105M	12	10.5	5.50F	750	185	13.78	1060	925	670	97
CN	7.00R16LT	115/110M	12	11.5	5.50F	775	200	14.25	1215	1060	670	97
CN	7.00R16LT	118/114L	14	11.5	5.50F	775	200	14.25	1320	1180	770	112
CN	7.00R16LT	118/114N	14	11.5	5.50F	775	200	14.25	1320	1180	770	112
CN	7.50R16LT	122/118L	14	12.5	6.00G	805	215	14.76	1500	3120	770	112
CN	7.50R16LT	125/121K	16	12.5	6.00G	805	215	14.76	1650	1450	870	126
CN	8.25R16LT	128/124L	16	13.5	6.50H	865	235	15.63	1800	1600	770	112
CN	11.00R20	152/149L	18	14.5	8.00	1059	293	19.65	3550	3250	930	135
CN	12R22.5	152/149L	18	16.0	9.00	1085	300	19.84	3550	3250	930	135



# BFR21

**Suitable Conditions**

Medium and long mileage vehicles running on paved roads.



# BFR28

**Suitable Conditions**

Medium and long mileage vehicles running on paved roads.



Suitable

- Groove and sipe design improve tire grip.
- The wide running surface improves pressure distribution for better grounding performance.
- Designs at the bottom of the main grooves improve handling and driving comfort.
- The widen shoulders and shallow groove design effectively dissipate heat to promote even shoulder wear.



Suitable

- Improved heat dissipation.
- Improved fuel economy.
- Strong grip.
- Improved skid resistance.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN	8.5R17.5	121/120M	12	11.0	6.00	802	215	14.72	1450	1400	625	91

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN	295/80R22.5	152/148M	16	14.5	9.00	1044	298	19.17	3550		850	123



## BFR29

### Suitable Conditions

Medium and long mileage vehicles running on paved roads.



## BFR46

### Suitable Conditions

Medium and long mileage vehicles running on paved roads



Suitable

- Directional position tire suitable for mid-to-long distance trucks and busses running on good roads.
- Tread compound formula improves scrub resistance.



Suitable

- High wear resistance.
- Long tread life.
- Improved fuel economy.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN	11R22.5	149/146M	18	15	8.25	1054	279	19.33	3250	3000	930	135

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN	315/80R22.5	157/154L	20	16.0	9	1076	312	19.69	4125		900	130





# BFR55

**Suitable Conditions**

Medium and long mileage vehicles running on paved roads



# BFR63

**Suitable Conditions**

Medium and long mileage vehicles running on paved roads.



Suitable

- High wear resistance.
- Long tread life.
- Improved fuel economy.



Suitable

- Reduced stone retention.
- Improved wear resistance extends tire service life.
- Improved directional and handling performance.
- Tread compound improves heat dissipation.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN/VN	11R22.5	144/142L	14	14.5	8.25	1054	279	19.33	2800	2650	720	105
CN/VN	11R22.5	146/143L	16	14.5	8.25	1054	279	19.33	3000	2725	830	120
CN	11R22.5	148/145L	16	14.5	8.25	1054	279	19.33	3150	2900	850	123
CN/VN	11R24.5	146/143L	14	14.5	8.25	1104	279	20.31	3000	2725	720	105
CN/VN	11R24.5	149/146L	16	14.5	8.25	1104	279	20.31	3250	3000	830	120
CN	215/75R17.5	135/133L	16	12.5	6.00	767	211	14.17	2180	2060	860	125
CN	235/75R17.5	143/141L	18	13.0	6.75	797	233	14.69	2725	2575	860	125
CN/VN	285/75R24.5	144/141L	14	14.5	8.25	1050	283	19.41	2800	2575	760	110
CN/VN	285/75R24.5	147/144L	16	14.5	8.25	1050	283	19.41	3075	2800	830	120
CN/VN	295/75R22.5	144/141L	14	14.5	9.00	1014	298	18.66	2800	2575	760	110
CN/VN	295/75R22.5	146/143L	16	14.5	9.00	1014	298	18.66	3000	2725	830	120
CN	315/80R22.5	157/154K	20	14.0	9.00	1076	312	19.69	4125	3750	900	130
CN	315/80R22.5	156/153L	20	14.0	9.00	1076	312	19.69	4000	3650	850	125
CN	385/65R22.5	160K	20	13.5	11.75	1072	389	19.45	4500		900	130

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
VN	11R22.5	148/145M	16	15.5	8.25	1065	279	19.33	3150		850	123



# BFR65

**Suitable Conditions**

Medium and long mileage vehicles running on paved roads.



# BFR68

**Suitable Conditions**

Medium and short mileage trucks running on paved roads.



Suitable

- High wear resistance.
- Long tread life.
- Improved fuel economy.



Suitable

- The sipe groove design improves heat dissipation, grip, and wet skid resistance.
- Groove nodules reduce stone retention.
- Tread groove design provides superior high-speed handling.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN/VN	12R22.5	152/149L	18	17.0	9.00	1085	300	19.84	3550	3250	930	135
CN/VN	295/80R22.5	152/149M	18	16.0	9.00	1044	298	19.17	3550	3250	900	130
CN	315/60R22.5	152/148L	18	14.5	9.75	950	313	17.40	3550	3150	900	130
VN	315/70R22.5	156/150L	18	15.5	9.00	1014	312	18.46	4000	3350	900	130
CN/VN	315/80R22.5	156/153L	20	17.0	9.00	1076	312	19.69	4000	3650	850	125

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN	315/80R22.5	156/153K	20	15.0	9.00	1076	312	19.69	4000		850	123



# BFR88

### Suitable Conditions

Medium and long mileage vehicles running on paved roads.



Suitable

- High wear resistance.
- Long tread life.
- Improved fuel economy.



# BAR26

### Suitable Conditions

Medium and long mileage vehicles running on paved roads.



Suitable

- Excellent durability.
- Improved heat dissipation.
- Tread chunking resistance.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN	10R22.5	144/142L	16	14.5	7.50	1019	254	19.84	2800	2650	900	130
VN	11R22.5	148/145M	16	14.5	8.25	1054	279	19.33	3150	2900	850	123
CN	11R24.5	149/146M	16	14.5	8.25	1104	279	20.31	3250	3000	830	120
CN	285/75R24.5	144/141M	14	14.5	8.25	1050	283	19.41	2800	2575	760	110
CN	285/75R24.5	147/144M	16	14.5	8.25	1050	283	19.41	3075	2800	830	120
CN	295/75R22.5	144/141M	14	14.5	9.00	1014	298	18.66	2800	2575	760	110
CN	295/75R22.5	146/143M	16	14.5	9.00	1014	298	18.66	3000	2725	830	120

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN	9.5R17.5	143/141J	18	13.5	6.75	842	240	15.63	2725	2575	875	125
CN/VN	215/75R17.5	135/133L	16	12.5	6.00	767	211	14.17	2180	2060	865	125
CN	215/75R17.5	135/133M	16	12.5	6.00	767	211	14.17	2180	2060	865	125
CN/VN	215/75R17.5	136/134J	18	12.5	6.00	767	211	14.17	2240	2120	890	129
CN/VN	225/70R19.5	128/126L	14	12.5	6.75	811	226	15.43	1800	1700	760	110
CN/VN	225/70R19.5	128/126L	16	12.5	6.75	811	226	15.43	1800	1700	760	110
CN	225/75R17.5	129/127M	14	12.5	6.75	783	226	14.45	1850	1750	725	105
CN	225/80R17.5	123/122M	14	15.5	6.75	805	226	14.72	1550	1500	700	125
CN	225/80R17.5	123/122M	18	15.5	6.75	805	226	14.72	1550	1500	700	102
CN/VN	235/75R17.5	132/129M	16	12.5	6.75	797	233	14.69	2000	1850	830	120
CN/VN	235/75R17.5	143/141J	18	12.5	6.75	797	233	14.69	2725	2575	865	125
VN	235/75R17.5	143/141L	18	12.5	6.75	797	233	14.69	2725	2575	865	125
CN/VN	245/70R19.5	135/133M	16	13.0	7.50	839	248	15.39	2180	2060	830	120
CN/VN	245/70R19.5	136/134M	16	13.0	7.50	839	248	15.39	2240	2120	830	120
CN/VN	245/70R19.5	144/142J	18	13	7.50	839	248	15.39	2800	2650	900	130
CN/VN	255/70R22.5	140/137M	16	13.5	7.50	930	255	17.13	2500	2300	830	120
CN	265/70R19.5	143/141J	18	13.5	7.50	867	262	15.83	2725	2575	900	130
CN/VN	275/70R22.5	144/141M	16	14.5	8.25	958	276	17.56	2800	2575	830	120
CN/VN	275/70R22.5	148/145M	16	14.5	8.25	958	276	17.56	3150	2900	900	130
CN/VN	275/70R22.5	148/145M	18	14.5	8.25	958	275	17.56	3150	2900	900	130
CN	285/70R19.5	146/144M	16	13.0	8.25	895	283	16.3	3000	2800	900	130
CN	285/70R19.5	150/148K	18	13.0	8.25	895	283	16.3	3350	3150	900	130



# BAR27

### Suitable Conditions

Long mileage trucks and passenger busses running on paved and highway roads.



# BAR67

### Suitable Conditions

Medium and long mileage trucks running on paved roads.



Suitable

- Improved braking and traction performance.
- Greater wear resistance.



Suitable

- Tread groove design reduces rolling resistance and improves mileage.
- Small sipes effectively improve wet grip.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
VN	10.00R20	149/146K	18	17.5	7.50	1054	278	19.13	3250	3000	930	135

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN	7.50R16LT	122/118L	14	10.0	6.00G	805	215	14.76	1500		770	112



# BDR01

### Suitable Conditions

Medium and long mileage vehicles running on paved roads.



Suitable

- Optimized pattern design provides better driving and braking performance.
- The open shoulder design allows the tire to run cool.
- Deeper tread design and special tread formula improve durability.



# BDR28

### Suitable Conditions

Short and medium distance trucks traveling on paved roads in winter weather.



Suitable

- Improved winter traction.
- Greater scrub resistance.
- Improved driving safety in winter.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
VN	10.00R20	149/146K	18	19.0	7.50	1054	278	19.13	3250	3000	930	135

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN/VN	225/70R19.5	128/126L	14	16.5	6.75	811	226	15.43	1800	1700	760	110
CN/VN	245/70R19.5	135/133L	16	16.5	7.50	839	248	15.39	2180	2060	860	125



# BDR72

### Suitable Conditions

Medium and long mileage trucks running on paved roads.



Suitable

- Widen tread groove design improves grip.
- Tread width is designed to improve traction and reduce fuel consumption.
- The transverse sipe design improves traction on wet roads.


Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN	315/80R22.5	156/153K	20	19.5	9.00	1076	312	19.69	4000	3650	850	123



# BDR75

### Suitable Conditions

Medium and long mileage vehicles running on paved roads.



Suitable

- Excellent traction.
- High wear resistance.
- Tread chunking resistance.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN	9.5R17.5	143/141J	18	16.5	6.75	842	240	15.63	2725	2575	875	125
CN	11R22.5	146/143K	16	20.0	8.25	1065	279	19.33	3000	2725	830	120
CN	12R22.5	152/149K	18	19.5	9.00	1085	300	19.84	3550	3250	930	135
CN	205/75R17.5	124/122L	14	15.0	6.00	753	205	13.90	1600	1500	750	110
CN	215/75R17.5	136/134J	18	15.0	6.00	767	211	14.17	2240	2120	890	129
CN	215/75R17.5	135/133L	16	15.0	6.00	767	211	14.17	2180	2060	860	125
CN	235/75R17.5	143/141L	18	15.0	6.75	797	233	14.69	2725	2575	860	125
CN	245/70R19.5	144/142J	18	16.0	7.50	839	248	15.39	2800	2650	900	130
CN	265/70R19.5	143/141J	18	16.0	7.50	867	262	15.83	2725	2575	900	130
CN	285/70R19.5	150/148K	18	16.0	8.25	895	283	16.30	3350	3150	900	130
VN	295/80R22.5	152/148M	18	22.0	9.00	1044	298	19.17	3550	3150	850	125
VN	295/80R22.5	152/149M	18	22.0	9.00	1044	298	19.17	3550	3250	900	130
CN/VN	315/70R22.5	156/150L	18	20.0	9.00	1014	312	18.46	4000	3350	900	130
CN	315/70R22.5	154/150L	18	20.0	9.00	1014	312	18.46	3750	3350	900	130
CN/VN	315/80R22.5	156/153L	20	22.5	9.00	1076	312	19.69	4000	3650	850	125



# BDR77

### Suitable Conditions

Medium and long mileage vehicles running on paved roads.



Suitable

- Tread block sipe design improves grip.
- Open shoulder and tread groove design reduce stone retention and improve traction.
- High strength casing for improved durability.



# BDR78

### Suitable Conditions

Medium and long mileage trucks running on paved roads



Suitable

- Improved traction and braking performance.
- High wear and tear resistance.
- Improved tire mileage.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN/VN	10R22.5	141/139M	14	18.5	7.50	1019	254	18.74	2575	2430	790	115
CN/VN	11R22.5	144/142L	14	19.5	8.25	1065	279	19.33	2800	2650	720	105
VN	11R22.5	144/142M	14	19.5	8.25	1065	279	19.33	2800	2650	720	105
CN/VN	11R22.5	146/143L	16	19.5	8.25	1065	279	19.33	3000	2725	830	120
VN	11R22.5	146/143M	16	19.5	8.25	1065	279	19.33	3000	2725	830	120
CN/VN	11R24.5	146/143L	14	19.5	8.25	1116	279	20.31	3000	2725	720	105
VN	11R24.5	146/143M	14	19.5	8.25	1116	279	20.31	3000	2725	720	105
CN/VN	11R24.5	149/146L	16	19.5	8.25	1116	279	20.31	3250	3000	830	120
VN	11R24.5	149/146M	16	19.5	8.25	1116	279	20.31	3250	3000	830	120
CN/VN	255/70R22.5	140/137L	16	19.5	7.50	930	255	17.13	2500	2300	830	120
VN	285/75R24.5	144/141L	14	19.5	8.25	1062	283	19.41	2800	2575	760	110
VN	285/75R24.5	147/144L	16	19.5	8.25	1062	283	19.41	3075	2800	830	120
VN	295/75R22.5	144/141L	14	19.5	9.00	1026	298	18.66	2800	2575	760	110
VN	295/75R22.5	146/143L	16	19.5	9.00	1026	298	18.66	3000	2725	830	120

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN	315/80R22.5	156/153K	20	18.0	9.00	1076	312	19.69	4000	3650	850	125



# BDR81

**Suitable Conditions**

Medium and long mileage vehicles running on paved roads.



Suitable

- Extended tread life.
- Improved tear resistance.
- Improved heat dissipation.
- Long mileage.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN	295/80R22.5	152/149L	18	21.0	9.00	1044	298	19.17	3550	3250	900	130
CN	315/80R22.5	156/153L	20	20.0	9.00	1076	312	19.69	4000	3650	850	125



# BTR55

**Suitable Conditions**

Medium and long mileage trucks traveling on paved roads.



Suitable

- Reduced stone retention.
- Strong grip improves skid resistance.
- Wide shoulder improves heat dissipation.
- Even tread wear improves service life.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
VN	ST235/80R16	129/125L	14	9.0	6 1/2 J	782	235	13.94	1850	1650	760	110
VN	ST235/85R16	132/127L	14	9.0	6 1/2 J	806	235	14.33	2000	1750	760	110





## BTR60

### Suitable Conditions

Long mileage trucks and passenger busses running on paved and highway roads.



## BTR96

### Suitable Conditions

Medium and long mileage vehicles running on paved roads.



Suitable

- Long tread life and great high speed stability.
- Durable and wear-resistant sidewall.
- Improved heat dissipation.
- Low noise emissions and reduced stone retention.



Suitable

- Double-wide.
- Improved heat dissipation.
- Improved skid and wear resistance.
- Reduced stone retention.
- Extended tread life.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
VN	385/55R22.5	160K	20	14.5	12.25	996	386	18.39	4500		900	130
CN/VN	385/65R22.5	160K	20	15.5	11.75	1072	389	19.45	4500		900	130

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN	385/65R22.5	160K	20	15.5	11.75	1072	389	19.45	4500		900	130
VN	435/50R19.5	160J	20	12.5	14.00	931	438	16.65	4500		900	130
VN	445/45R19.5	160J	20	13.0	15.00	895	446	16.46	4500		900	130



# BAM01

**Suitable Conditions**

Medium and long mileage trucks running on paved and unpaved roads.



Suitable

- Improved heat dissipation.
- Excellent durability.



# BAM01A

**Suitable Conditions**

Medium and long mileage trucks running on paved and unpaved roads.



Suitable

- Improved heat dissipation.
- Excellent durability.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN/VN	7.00R16LT	118/114L	14	11.5	5.50F	775	200	14.25	1320	1180	770	112
CN	7.00R16LT	118/114N	14	11.5	5.50F	775	200	14.25	1320	1180	770	112
CN/VN	7.50R16LT	122/118L	14	12.5	6.00G	805	215	14.76	1500	1320	770	112
VN	8.25R16LT	126/122L	14	13.5	6.50H	855	235	15.63	1700	1500	670	95
CN/VN	8.25R16LT	128/124L	16	13.5	6.50H	855	235	15.63	1800	1600	770	112
VN	8.25R20	139/137K	16	13.0	6.50	974	236	17.80	2430	2300	930	135
CN	9.00R20	141/139K	14	15.0	7.00	1019	259	18.54	2575	2430	790	115
CN/VN	9.00R20	144/142K	16	15.0	7.00	1019	259	18.54	2800	2650	900	130
CN/VN	10.00R20	149/146K	18	16.0	7.50	1054	278	19.13	3250	3000	930	135
CN/VN	11.00R20	150/147K	16	16.5	8.00	1085	293	19.65	3350	3075	830	120
CN/VN	11.00R20	152/149K	18	16.5	8.00	1085	293	19.65	3550	3250	930	135
CN/VN	12.00R20	154/151K	18	17.0	8.50	1125	315	20.31	3750	3450	830	120
CN/VN	12.00R20	158/155J	22	17.0	8.50	1125	315	20.31	4250	3875	970	140
CN/VN	12.00R24	160/157K	20	14.0	8.50	1238	315	22.52	4500	4125	900	130
CN/VN	11R22.5	148/145M	16	16.0	8.25	1059	279	19.33	3150	2900	850	123
CN	11R22.5	149/146M	18	16.0	8.25	1059	279	19.33	3250	3000	930	135
CN/VN	11R24.5	149/146M	16	16.0	8.25	1110	279	20.31	3250	3000	8330	120
CN	12R22.5	152/149K	18	17.5	9.00	1085	300	19.84	3550	3250	930	135
CN/VN	13R22.5	154/150L	18	16.0	9.75	1124	320	20.51	3750	3350	850	125
CN	13R22.5	156/150K	20	16.0	9.75	1124	320	20.51	4000	3350	900	130
CN	295/80R22.5	152/149L	18	17.5	9.00	1044	298	19.17	3550	3250	900	130
CN/VN	315/80R22.5	156/153K	20	16.0	9.00	1076	312	19.69	4000	3650	850	125

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN	7.50R16LT	122/118L	14	11.5	6.00G	805	215	14.76	1500	1320	770	112
CN	8.25R16LT	128/124L	16	12.5	6.50H	855	235	15.63	1800	1600	770	112
VN	10.00R20	149/146K	18	16.0	7.50	1054	278	19.13	3250	3000	930	135
CN	11.00R20	150/147K	16	16.5	8.00	1085	293	19.65	3350	3075	830	120
CN	11.00R20	152/149K	18	16.5	8.00	1085	293	19.65	3550	3250	930	135



## BAM02

### Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads.



Suitable

- The large, deep shoulder grooves increase traction.
- The unique tread groove angle and inner groove design significantly improves grip and traction, while also providing great directional stability.
- The wide running surface and tread compound improve puncture and abrasion resistance.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
VN	11.00R20	150/147K	16	17.0	8.00	293	19.65	3350	3075	830	120	
VN	295/80R22.5	152/149L	18	16.0	9.00	298	19.17	3550	3250	900	130	



## BAM03

### Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads.



Suitable

- Reduced noise emissions.
- Improved puncture and wear resistance.
- Excellent heat dissipation.
- Improved handling and traction.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN	315/80R22.5	157/154K	20	17.0	9.00	1076	312	19.69	4125	3750	900	130



## BAM04

### Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads.



## BAM05

### Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads.



Suitable

- Wide-base tire.
- Deep tread improves wear resistance.
- Strengthened tread and carcass design improve overall tire safety.



Suitable

- Improved wear resistance.
- Improved handling and wet skid resistance.
- Reduced stone retention.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
VN	255/70R22.5	140/137L	16	16.0	7.50	930	255	17.13	2500	2300	830	120
CN	11.00R20	152/149K	18	16.5	8.00		293	19.65	3550	3250	930	135

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN	7.00R16LT	118/114K	14	11.5	5.50F	775	200	14.25	1320	1180	770	112
CN	7.50R16LT	122/118L	14	12.5	6.00G	805	215	14.76	1500	1320	770	112
CN	7.50R16LT	125/121L	16	12.5	6.00G	805	215	14.76	1650	1450	870	125
CN	8.25R16LT	128/124L	16	14.0	6.50H	855	235	15.63	1800	1600	770	112
CN	8.25R20	139/137K	16	13.0	6.50	974	236	17.80	2430	2300	930	135
CN	9.00R20	141/139K	14	15.0	7.00	1019	259	18.54	2575	2430	790	115
CN	9.00R20	144/142K	16	15.0	7.00	1019	259	18.54	2800	2650	900	130
CN	10.00R20	149/146K	18	16.0	7.50	1054	278	19.13	3250	3000	930	135
CN	11.00R20	150/147K	16	16.5	8.00	1085	293	19.65	3350	3075	830	120
CN	11.00R20	152/149K	18	16.5	8.00	1085	293	19.65	3550	3250	930	135
CN	12.00R20	154/151K	18	17.0	8.50	1125	315	20.31	3750	3450	830	120
CN	12.00R20	158/155J	22	17.0	8.50	1125	315	20.31	4250	3875	970	140
CN	12.00R20	158/155K	22	17.0	8.50	1125	315	20.31	4250	3875	970	140
CN	11R22.5	149/146M	18	16.0	8.25	1059	279	19.33	3250	3000	930	135
CN	11R22.5	148/145M	16	16.0	8.25	1059	279	19.33	3150	2900	850	123
CN	12R22.5	152/149L	18	15.5	9.00	1085	300	19.84	3550	3250	930	135
CN	315/80R22.5	156/153L	20	16.5	9.00	1076	312	19.69	4000	3650	850	123
CN/VN	325/95R24	162/160K	22	15.5	9.00	1228	325	22.36	4750	4500	850	125



## BAM25

### Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads.



Suitable

- High wear resistance.
- Low noise emissions.
- Long tread life.
- Improved heat dissipation.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
VN	10.00R20	149/146K	18	15.0	7.50	1054	278	19.13	3250	3000	930	135
CN	11.00R20	152/149K	18	16.5	8.00	1059	293	19.65	3550	3250	930	135
CN/VN	12.00R24	162/160K	22	14.5	8.50	1238	315	22.52	4750	4500	850	125
VN	12R22.5	152/149L	18	15.5	9.00	1085	300	19.84	3550	3250	930	135



## BAM86

### Suitable Conditions

Medium and short mileage trucks running on paved and unpaved roads.



Suitable

- The shoulder design promotes even wear performance.
- The reinforced belt design improves tread rigidity, wear resistance and impact resistance on non-paved roads.
- Three zigzag grooves improve tire adaptability.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN	315/80R22.5	156/153K	20	16.5	9.00	1076	312	19.69	4000	3650	850	123



## BAM99

### Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads.



Suitable

- Four belt structure improve shock and puncture resistance.
- Aggressive tread design provides excellent on and off-road traction.
- Main grooves enhance wet traction.
- Central groove nodules reduce stone retention.



## BAR02

### Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads.



Suitable

- Wide tread and solid shoulder ribs deliver exceptional stability and promote even wear.
- Deep tread improves service life and traction.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN/VN	385/65R22.5	158K	18	16.5	11.75	1072	389	19.45	4250	830	120	
CN/VN	385/65R22.5	160K	20	16.5	11.75	1072	389	19.45	4500	900	130	
CN	425/65R22.5	165K	20	17.5	12.25	1124	422	20.28	5150	830	120	

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN/VN	11R22.5	146/143K	16	18.0	8.25	1065	279	19.33	3000	2725	830	120
CN/VN	11R24.5	149/146K	16	18.0	8.25	1116	279	20.31	3250	3000	830	120
CN/VN	255/70R22.5	140/137L	16	17.5	7.50	930	255	17.13	2500	2300	830	120
CN	255/70R22.5	143/141K	18	17.5	7.50	930	255	17.13	2725	2575	900	130
CN/VN	275/70R22.5	148/145K	16	16.0	8.25	958	276	17.56	3150	2900	900	130
CN/VN	275/70R22.5	148/145K	18	16.0	8.25	958	276	17.56	3150	2900	900	130
CN/VN	315/80R22.5	161/157G	20	17.0	9.00	1076	312	19.69	4625	4125	900	130
CN	315/80R22.5	156/153K	20	17.0	9.00	1076	312	19.69	4000	3650	850	125



## BAR06

### Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads.



Suitable

- Improved wet-skid resistance and grip.
- Improved driving comfort.



## BAR15

### Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads.



Suitable

- Improved heat dissipation.
- Excellent durability.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN/VN	12.00R24	160/157K	20	14.5	8.50	1238	315	22.52	4500	4125	900	130

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
VN	7.50R16LT	122/118L	14	13.0	6.00G	805	215	14.76	1500	1320	770	112
VN	7.50R16LT	125/121K	16	12.5	6.00G	805	215	14.76	1650	1450	870	126



## BDM10

### Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads.



## BDM12

### Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads.



Suitable

- Excellent traction.
- Excellent durability.
- Tread chunking resistance.



Suitable

- Excellent durability.
- High strength.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN	12R22.5	152/149K	18	20.0	9.00	1085	300	19.84	3550	3250	930	135
VN	13R22.5	154/151K	18	22.0	9.75	1124	320	20.51	3750	3450	830	120
CN/VN	13R22.5	156/150J	20	22.0	9.75	1124	320	20.51	4000	3350	875	125
CN/VN	315/80R22.5	156/153K	20	22.0	9.00	1076	312	19.69	4000	3650	850	125

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
VN	11.00R20	150/147K	16	18.0	8.00	1085	293	19.65	3350	3075	830	120





## BDM16

### Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads.



## BDM19

### Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads.



Suitable

- Deep tread pattern and tread compound improve wear and tear resistance effectively improving tire life.
- High-strength carcass improves overall load-bearing capabilities.
- Narrow groove design reduces tire rigidity and promotes even wear.
- Deep main grooves effectively improve grip and traction.



Suitable

- Small block grooves reduce block stiffness and increase grip on wet roads.
- Tread groove design improves overall grip.
- Shoulder blocks are connected to ribs that help improve tear resistance and promote even wear.
- Wide running surface and deep tread effectively increase tread wear resistance and tire mileage.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
VN	13R22.5	154/151K	18	19.5	9.75	1124	320	20.51	3750	3450	830	120

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
VN	10.00R20	149/146K	18	19.0	7.50	1054	278	19.13	3250	3000	930	135
VN	11.00R20	152/149K	18	20.0	8.00	1085	293	19.65	3550	3250	930	135
CN/VN	12.00R24	160/157K	20	20.0	8.50	1238	315	22.52	4500	4125	900	130
CN	265/70R19.5	143/141K	18	15.0	7.50	867	262	15.83	2725	2575	900	130



## BDM26A

### Suitable Conditions

Medium and short mileage trucks running on paved and unpaved roads.



Suitable

- Small block grooves reduce block stiffness and increase grip on wet road surfaces.
- Main groove design improves overall grip.
- Shoulder blocks are connected to ribs that help improve tear resistance and promote even wear.
- Wide running surface and deep tread effectively increase tread wear resistance and tire mileage.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN	12.00R20	156/153J	20	21	8.50	1125	315	20.31	4000	3650	900	130



## BDM60

### Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads.



Suitable

- Excellent traction.
- Tread chunking resistance.
- Cut resistant.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
VN	12.00R24	160/157K	20	20.0	8.50	1238	315	22.52	4500	4125	900	130
VN	7.50R16LT	122/118L	14	16.0	6.00G	805	215	14.76	1500	1320	770	112



## BDM70

### Suitable Conditions

Medium and short mileage trucks running on paved and unpaved roads.



Suitable

- Tread sipes improve tire rigidity and grip.
- Tread grooves promote even tread wear and wear-resistance.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN	12.00R20	156/153J	20	18	8.50	1125	315	20.31	4000	3650	900	130



## BDM77

### Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads.



Suitable

- Tread sipes improve tire rigidity and grip.
- Tread grooves promote even tread wear and wear-resistance.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN	7.00R16LT	118/114K	14	14.0	5.50F	775	200	14.25	1320	1180	770	112
CN	8.25R16LT	128/124L	16	15.5	6.50H	855	235	15.63	1800	1600	770	112
CN	8.25R20	139/137K	16	17.0	6.50	974	236	17.80	2430	2300	930	135
CN	9.00R20	141/139K	14	18.0	7.00	1019	259	18.54	2575	2430	790	115
CN	9.00R20	144/142K	16	18.0	7.00	1019	259	18.54	2800	2650	900	130
CN	9.00R20	146/144K	18	18.0	7.00	1019	259	18.54	3000	2800	970	140
CN	10.00R20	149/146K	18	19.0	7.50	1054	278	19.13	3250	3000	930	135
CN	11.00R20	152/149K	18	20.0	8.00	1085	293	19.65	3550	3250	930	135
CN	11.00R20	150/147K	16	20.0	8.00	1085	293	19.65	3350	3075	830	120
CN	12.00R20	154/151K	18	20.0	8.50	1125	315	20.31	3750	3450	830	120
CN	12.00R20	158/155J	22	20.0	8.50	1125	315	20.31	4250	3875	970	140
CN	12.00R20	158/155K	22	20.0	8.50	1125	315	20.31	4250	3875	970	140
CN	11R22.5	148/145K	16	21.5	8.25	1065	279	19.33	3150	2900	850	123
CN	11R22.5	149/146K	18	21.5	8.25	1065	279	19.33	3250	3000	930	135
CN	12R22.5	152/149K	18	21.5	8.25	1065	279	19.33	3250	3000	930	135
CN	265/70R19.5	143/141K	18	15.5	7.50	867	262	15.83	2725	2575	900	130



## BDM79

### Suitable Conditions

Medium and short mileage trucks running on paved and unpaved roads.



## BDM82

### Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads.



Suitable

- The sturdy tread blocks provide powerful traction and off-road mobility.



Suitable

- Interlocking lugs improve stability and uniform wear.
- Stone ejectors reduce stone retention.
- Wide footprint and unique shoulder design improve stability.
- Special tread compound improves tread life.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
VN	325/95R24	162/160K	22	20.0	9.00	1228	325	22.36	4750	4500	850	125

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN	385/65R22.5	160K(158L)	20	16.5	11.75	1072	389	19.45	4500		900	130
CN	445/65R22.5	168K	20	16.5	13.00	1150	444	20.71	5600		830	120



## BDM90

### Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads.



## BDM91

### Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads.



Suitable

- Enhanced rubber compound specially designed for off-road applications improves cut, puncture, and chocking resistance.
- Extra-deep 31/32" tread depth and unique tread block design deliver superior on and off-road traction and excellent tread life.
- Tread grooves feature "stone ejectors" that effectively reduce stone retention.



Suitable

- Improved puncture and tear resistance.
- Reduced stone retention.
- Improved durability.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN/VN	11R22.5	146/143K	16	24.5	8.25	1065	279	19.33	3000	2725	830	120
CN/VN	11R24.5	149/146K	16	24.5	8.25	1116	279	20.31	3250	3000	830	120

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN	14.00R20	164/161G	20	19.0	10.0	1253	375	22.24	5000	4625	790	115



## BDM96

### Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads.



Suitable

- Deep tread improves traction and braking.
- Open shoulder design improves self-cleaning capabilities.
- Tread groove design reduces tire rigidity and promotes even treadwear.
- Block ribs improve tear resistance.



## BTM26

### Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads.



Suitable

- Strengthened bead structure improves durability.
- Tread compound design effectively resists puncture damage.
- Improved traction and handling in off-road conditions.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN	7.50R16LT	122/118K	14	14.0	6.00G	805	215	14.76	1500	1320	770	112
CN	8.25R16LT	128/124K	16	15.5	6.50H	855	235	15.63	1800	1600	770	112

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN	425/65R22.5	165K	20	17.5	12.25	1124	422	20.28	5150		830	120



## BDO16

### Suitable Conditions

Short mileage vehicles running on unpaved roads.



Suitable

- Wide running surface and deep tread design improve overall traction.
- Strengthened shoulder rib improves block stability.
- High-strength belt design improves the crown's impact resistance.
- Tread compound improves cut and block drop-off resistance.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
VN	11.00R20	152/149K	18	21.0	8.00	1085	293	19.65	3550	3250	930	135
VN	11.00R20	150/147K	16	21.0	8.00	1085	293	19.65	3350	3075	830	120



## BDO17

### Suitable Conditions

Short mileage vehicles running on unpaved roads.



Suitable

- Engineered to work in demanding applications such as mining, construction, and logging.
- The deep 31/32" tread depth offers a longer tread life and exceptional fuel efficiency.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN	12.00R20	158/155F	22	23.5	8.5	1125	315	20.31	4250		970	140



## BDO25

### Suitable Conditions

Short mileage vehicles running on unpaved roads.



- Improved heat dissipation.
- Greater tear resistance.
- Block drop-off resistance.

Suitable


Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN	12.00R20	158/155D	22	24.0	8.50	1125	315	20.31	4250		970	140



## BDO89

### Suitable Conditions

Short mileage vehicles running on unpaved roads.



- Excellent durability.
- Improved scratch and impact resistance.
- Strong off-road traction and driving stability.

Suitable

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN	7.50R16LT	122/118G	14	14.5	6.00G	805	215	14.76	1500	1320	770	112
CN	8.25R16LT	128/124G	16	15.5	6.50H	865	235	15.63	1800	1600	770	112
CN	8.25R20	139/137G	16	17.0	6.50	986	236	17.80	2430	2300	930	135
CN	9.00R20	141/139F	14	20.5	7.00	1019	259	18.54	2575	2430	790	115
CN	9.00R20	144/142F	16	20.5	7.00	1030	259	18.54	2800	2650	900	130
CN	9.00R20	146/144F	18	20.5	7.00	1019	259	18.54	3000	2800	970	140
CN	10.00R20	149/146F	18	23.5	7.50	1065	278	19.13	3250	3000	930	135
VN	11.00R20	152/149F	18	24.5	8.00	1096	293	19.65	3550	3250	930	135
VN	11.00R20	150/147F	16	24.5	8.00	1096	293	19.65	3350	3075	830	120
VN	12.00R20	154/151F	18	24.5	8.50	1136	315	20.31	3750	3450	830	120
VN	12.00R20	158/155F	22	24.5	8.50	1136	315	20.31	4250	3875	970	140
CN/VN	12.00R24	160/157F	20	31.0	8.50	1238	315	22.52	4500	4125	900	130
CN	11R22.5	146/143G	16	23.5	8.25	1065	279	19.33	3000	2725	830	120
CN	11R22.5	148/145G	16	23.5	8.25	1065	279	19.33	3150	2900	850	123
CN	11R22.5	149/146G	18	23.5	8.25	1065	279	19.33	3250	3000	930	135
CN/VN	11R24.5	149/146G	16	23.5	8.25	1104	279	20.31	3250	3000	830	120
CN	12R22.5	152/149G	18	23.5	9.00	1085	300	19.84	3550	3250	930	135
CN	235/75R17.5	143/141G	16	17.0	6.75	803	233	14.69	2725	2575	860	125
CN	235/75R17.5	143/141G	18	17.0	6.75	797	233	14.69	2725	2575	875	127
CN	295/80R22.5	152/149J	18	23.5	9.00	1044	298	19.17	3550	3250	900	130
CN	315/80R22.5	156/150G	18	23.5	9.00	1076	312	19.69	4000	3350	850	123





## BDW62

### Suitable Conditions

Short and medium mileage trucks traveling on paved roads in winter weather.



## BDW72

### Suitable Conditions

Short and medium distance trucks traveling on paved roads in winter weather.



☉ Suitable

- Improved rigidity increases wear resistance.
- Tread design promotes even tread wear.
- Winter tread compound improves grip and handling stability.



☉ Suitable

- Improved rigidity.
- Winter grip and traction.
- Improved safety in winter.
- Winter weather driving stability.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
VN	11R22.5	146/143L	16	20.5	8.25	1065	279	19.33	3000		830	120
VN	11R24.5	149/146L	16	20.5	8.25	1116	279	20.31	3250		830	120

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
VN	11R22.5	144/142L	14	21.0	8.25	1065	279	19.33	2800	2650	720	105
CN/VN	11R22.5	146/143L	16	21.0	8.25	1065	279	19.33	3000	2725	830	120
VN	11R24.5	146/143L	14	21.0	8.25	1116	279	20.31	3000	2725	720	105
CN/VN	11R24.5	149/146L	16	21.0	8.25	1116	279	20.31	3250	3000	830	120




### Important Tips for Optimal Tire Performance:

- 1 Maintain optimum air pressure
- 2 Inspect tread grooves to ensure tires are safe and legal
- 3 Visually check for tire damage

Ensure you check your tires once a month and before long trips to maintain performance and ensure safety.

### Why is it important I have the correct tire pressure?

A tire at optimum air pressure will ensure your safety, provide greater driving performance, improve tire life and reduce fuel consumption. Mileage, environment, and temperature changes all affect the pressure of your tires. An over-inflated tire will increase tire stiffness which influences driving comfort and can cause unnecessary reverberations. This can also increase the probability of tire damage and accelerate tread wear.

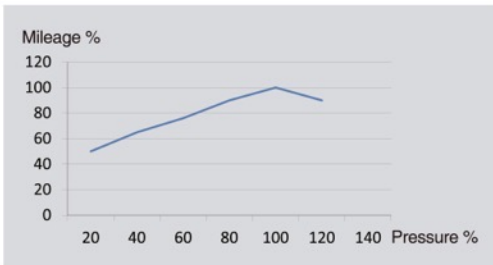

**Note:** Statistics are from the China National Rubber Tire Quality Supervision and Inspection Center <<Vehicle Tire Usage and Case Analysis>>

### Where do I find the optimum tire pressure for my vehicle?

Tire sidewalls conveniently provide recommended tire pressure levels. Maintaining proper tire pressure is the most important way to extend the life and durability of your tires. Under-inflation is the main reason for a majority of serious tire ruptures, delamination, or punctures. A low tire pressure can reduce the load bearing capabilities of a tire, increase shoulder wear, cause excessive bending in the sidewall, and reduce rolling resistance resulting in overheating or internal damage.

### How do I check my tire pressure?

- 1) Make sure to purchase a certified air pressure gauge.
- 2) Tires must be checked in a cold "state" (at least three hours after driving).
- 3) Insert the gauge into the valve.
- 4) Compare the measured air pressure level with the optimum tire pressure.



### Why is it Important I Check for Tire Wear?


When the tread depth of your tire reaches 1.6mm, be sure to replace or re-tread them immediately. All new tires have a wear mark indicator, and when the tread is finally moved down to that level, the smooth surface of the tread groove will reveal the wear mark. Most of the accidents in wet weather are caused by worn-out tires, while excessive wear is also more likely to cause punctures.

### Why is it Important I Check for Tire Damage?

A tire with any signs of damage is susceptible to tire separation, puncturing, etc.; therefore it is extremely important to often check for signs of damage on your tires (at least once a month). If in doubt, let a tire dealer check for you. If you find any abnormal damage, wear, ruptures, bulges, or leaks you should immediately remove the tire for inspection. Do not do any temporary repairs or use the inner tube to substitute for correct/certified repairs.

### Do Not Overload Your Vehicle

To know your vehicle loading limits, check the owner's manual. Over-loaded vehicles will cause tires and other parts of the vehicle take on additional pressure. This will reduce handling, fuel economy, and possibly cause tire failure. An overloaded tire is also susceptible to serious ruptures, component separation or punctures. The load capacity of the new tire should not be lower than the capacity marked on the tire label, and remember that the optimum rim width is critical to proper load distribution and tire performance. When used on light trucks, multipurpose vehicle or trailers, the maximum load capacity marked on the sidewall of the tire should be reduced by 10%.


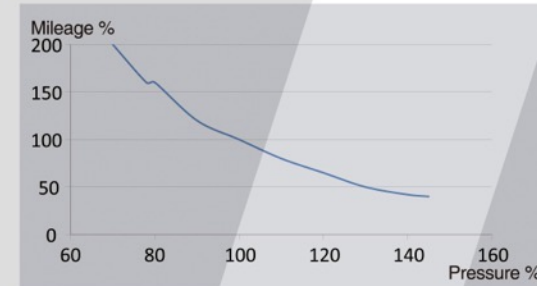


**Note:** Statistics are from the China National Rubber Tire Quality Supervision and Inspection Center <<Vehicle Tire Usage and Case Analysis>>


### Suspension Maintenance, Wheel Positioning and Dynamic Balancing, and Tire Rotation

Non-periodic tire replacement, suspension parts wear, dynamic balance, misalignment all will lead to excessive vibration or uneven wear. Tire rotation should be done according to the recommendations of the vehicle manufacturer, or at least every 10,000 km.

### Truck / Bus Tire Rotation Diagram

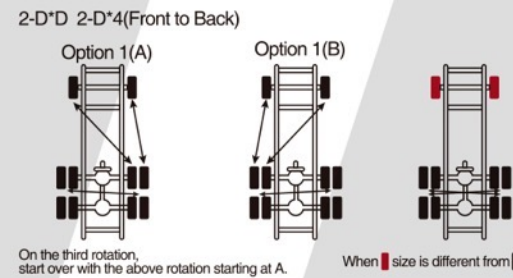
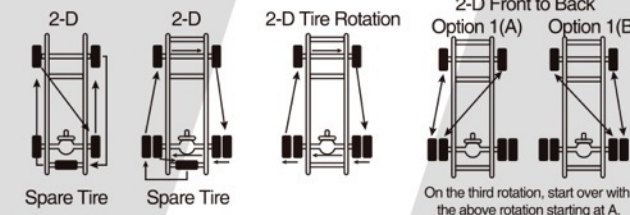


### 2\*2-D Tire Rotation



If the front and back axel wheel sizes are different, you should only rotate them in positions with the same sizes.

### 2\*2-D (Front to Back)



### The Importance of Tire Replacement

A timely tire replacement is critical to driver safety and also influences vehicle lifespan and performance. You should replace a tire if you see any tire erosion or problems that are impossible to repair.



**WARNING** Before replacing the tires, be sure to refer to the owner's manual and follow the advice of the vehicle manufacturer regarding the replacement of the tires.

Replacing the size or type of tires will seriously affect the vehicle's operating and safety performance.


When selecting other tires that are different from the originally installed tires, consult a professional installer to ensure that the appropriate installation spacing, load capacity and inflation pressure are selected. You should not exceed the maximum load and inflation pressure marked on the sidewall of the tire.

When replacing tires, you must use tires with the same outer diameter and load capacity. Make sure to adjust the inflation pressure to avoid overloading your tires.

For correct load and inflation data, see the Tire and Rim Association's Load and Inflation Tables, ETRTO or JATMA standards.

### Tire Storage Methods

Before putting your tire(s) in storage, check for signs of abrasion and/or damage and store according to the following directions.

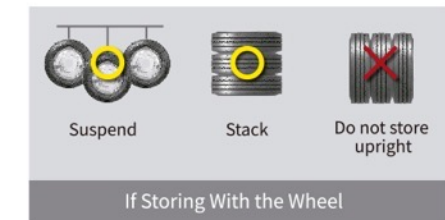

### User information for truck and bus tire

1. Always deflate the tire completely before removing lugs or side rings.
2. Never use rim parts of different manufacturers or different sizes.
3. Never mount tires on rims which are damaged or not smooth and clean.
4. Always clean and inspect the rim. Lubricate beads and rim flanges for tubeless tires. tube and rim side of flap with an approved rubber lubricant.
5. Always be sure that rim components are properly seated before inflating.