


ECOSAVER




Tire Direct
La nueva generación

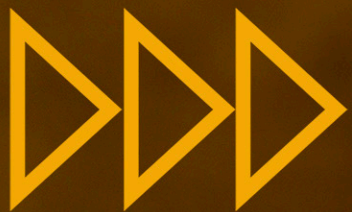

TERCELO TIRE TBR PATTERN BOOK ECOSAVER TBR PATTERN SERIES



EC020

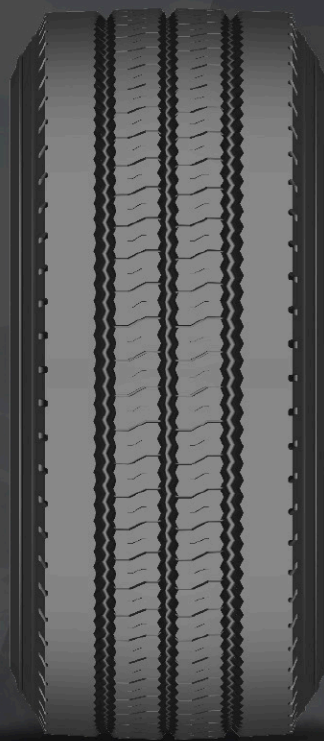

EC077



EC068



EC023



EC025




Product characteristics

Mixed highway and freeway for long distance and national transportation service.
Effectively reduce rolling resistance, improve tire's drainage and stability performance.
Low noise and high wear resistance.

ECO20

SIZE	PATTERN	PR	SPEED RATE	LOAD INDEX	S.W(mm)	O.D(mm)	T. D (mm)	MAX LOAD CAPACITY (KGS)		INFLATION PRESSURE (PSI)	
								SINGLE	DUAL	SINGLE	DUAL
11R22.5	ECO20	18PR	M	149/146	279	1054	15	3250	3000	135	135
11R24.5	ECO20	16PR	M	149/146	279	1104	15	7160	6610	120	120
295/75R22.5	ECO20	16PR	M	146/143	298	1014	15	3000	2725	120	120
285/75R24.5	ECO20	16PR	M	147/144	283	1050	15	2800	2575	110	110

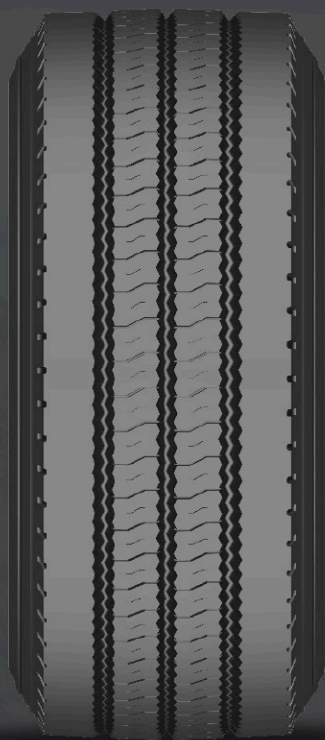

Product characteristics

Mixed highway and freeway for long distance and national transportation service.
Effectively reduce rolling resistance, and
Low noise and high wear resistance.

ECO77

SIZE	PATTERN	PR	SPEED RATE	LOAD INDEX	S.W(mm)	O.D(mm)	T. D (mm)	MAX LOAD CAPACITY (KGS)		INFLATION PRESSURE (PSI)	
								SINGLE	DUAL	SINGLE	DUAL
11R22.5	ECO20	18PR	L	148/145	279	1054	14	3250	3000	135	135



Product characteristics

1. Three zigzag with transverse deep grooves optimize speed and traction performance, provides excellent performance on wet road surface.
2. Suitable for light truck, truck on general roads and good roads.
3. Low noise and high wear resistance.

ECO68

SIZE	PATTERN	PR	SPEED RATE	LOAD INDEX	S.W(mm)	O.D(mm)	T. D (mm)	MAX LOAD CAPACITY (KGS)		INFLATION PRESSURE (PSI)	
								SINGLE	DUAL	SINGLE	DUAL
11R22.5	ECO68	18PR	L	149/146	279	1054	15	3250	3000	135	135
11R24.5	ECO68	16PR	K	149/146	279	1104	15	7160	6610	120	120



Product characteristics

1. Closed shoulder delivers smooth wear, fuel efficiency and reinforced stability. Suitable for light truck, truck on general roads and good roads.
2. Heel & toe stopper in lateral grooves results in self-regenerating sipe which keeps excellent traction performance until the end of wear.
3. Mixed highway and freeway for long distance and national transportation service.

ECO23

SIZE	PATTERN	PR	SPEED RATE	LOAD INDEX	S.W(mm)	O.D(mm)	T. D (mm)	MAX LOAD CAPACITY (KGS)		INFLATION PRESSURE (PSI)	
								SINGLE	DUAL	SINGLE	DUAL
11R22.5	ECO23	18PR	L	149/146	279	1054	22	3250	3000	135	135
11R24.5	ECO23	16PR	L	149/146	279	1104	22	7160	6610	120	120
295/75R22.5	ECO23	16PR	L	146/143	298	1014	21	3000	2725	120	120



Product characteristics

1. Drive position of heavy-duty truck for mix road application.
2. Special tread compound & design enable low heat build-up, excel lent puncture and cut resistance.
3. Super steel belt carcass construction enhances casing strength and maximizes tyre load capacity.

ECO25

SIZE	PATTERN	PR	SPEED RATE	LOAD INDEX	S.W(mm)	O.D(mm)	T. D (mm)	MAX LOAD CAPACITY (KGS)		INFLATION PRESSURE (PSI)	
								SINGLE	DUAL	SINGLE	DUAL
11R22.5	ECO25	18PR	L	149/146	279	1054	22.5	3250	3000	135	135
11R24.5	ECO25	16PR	L	149/146	279	1104	22.5	7160	6610	120	120

Tire Direct 
La nueva generación

www.tiredirect.com.mx



TIRE DIRECT



/TIRE_DIRECT



/TIREDIRECTMX



TIRE DIRECT