

MIRAGE

Truck and Bus Tire Catalog

MIRAGE

Tire Direct
La nueva generación



Tire Direct
La nueva generación



TIRE DIRECT



/TIRE_DIRECT




/TIREDIRECTMX



TIRE DIRECT

Ver 21-1

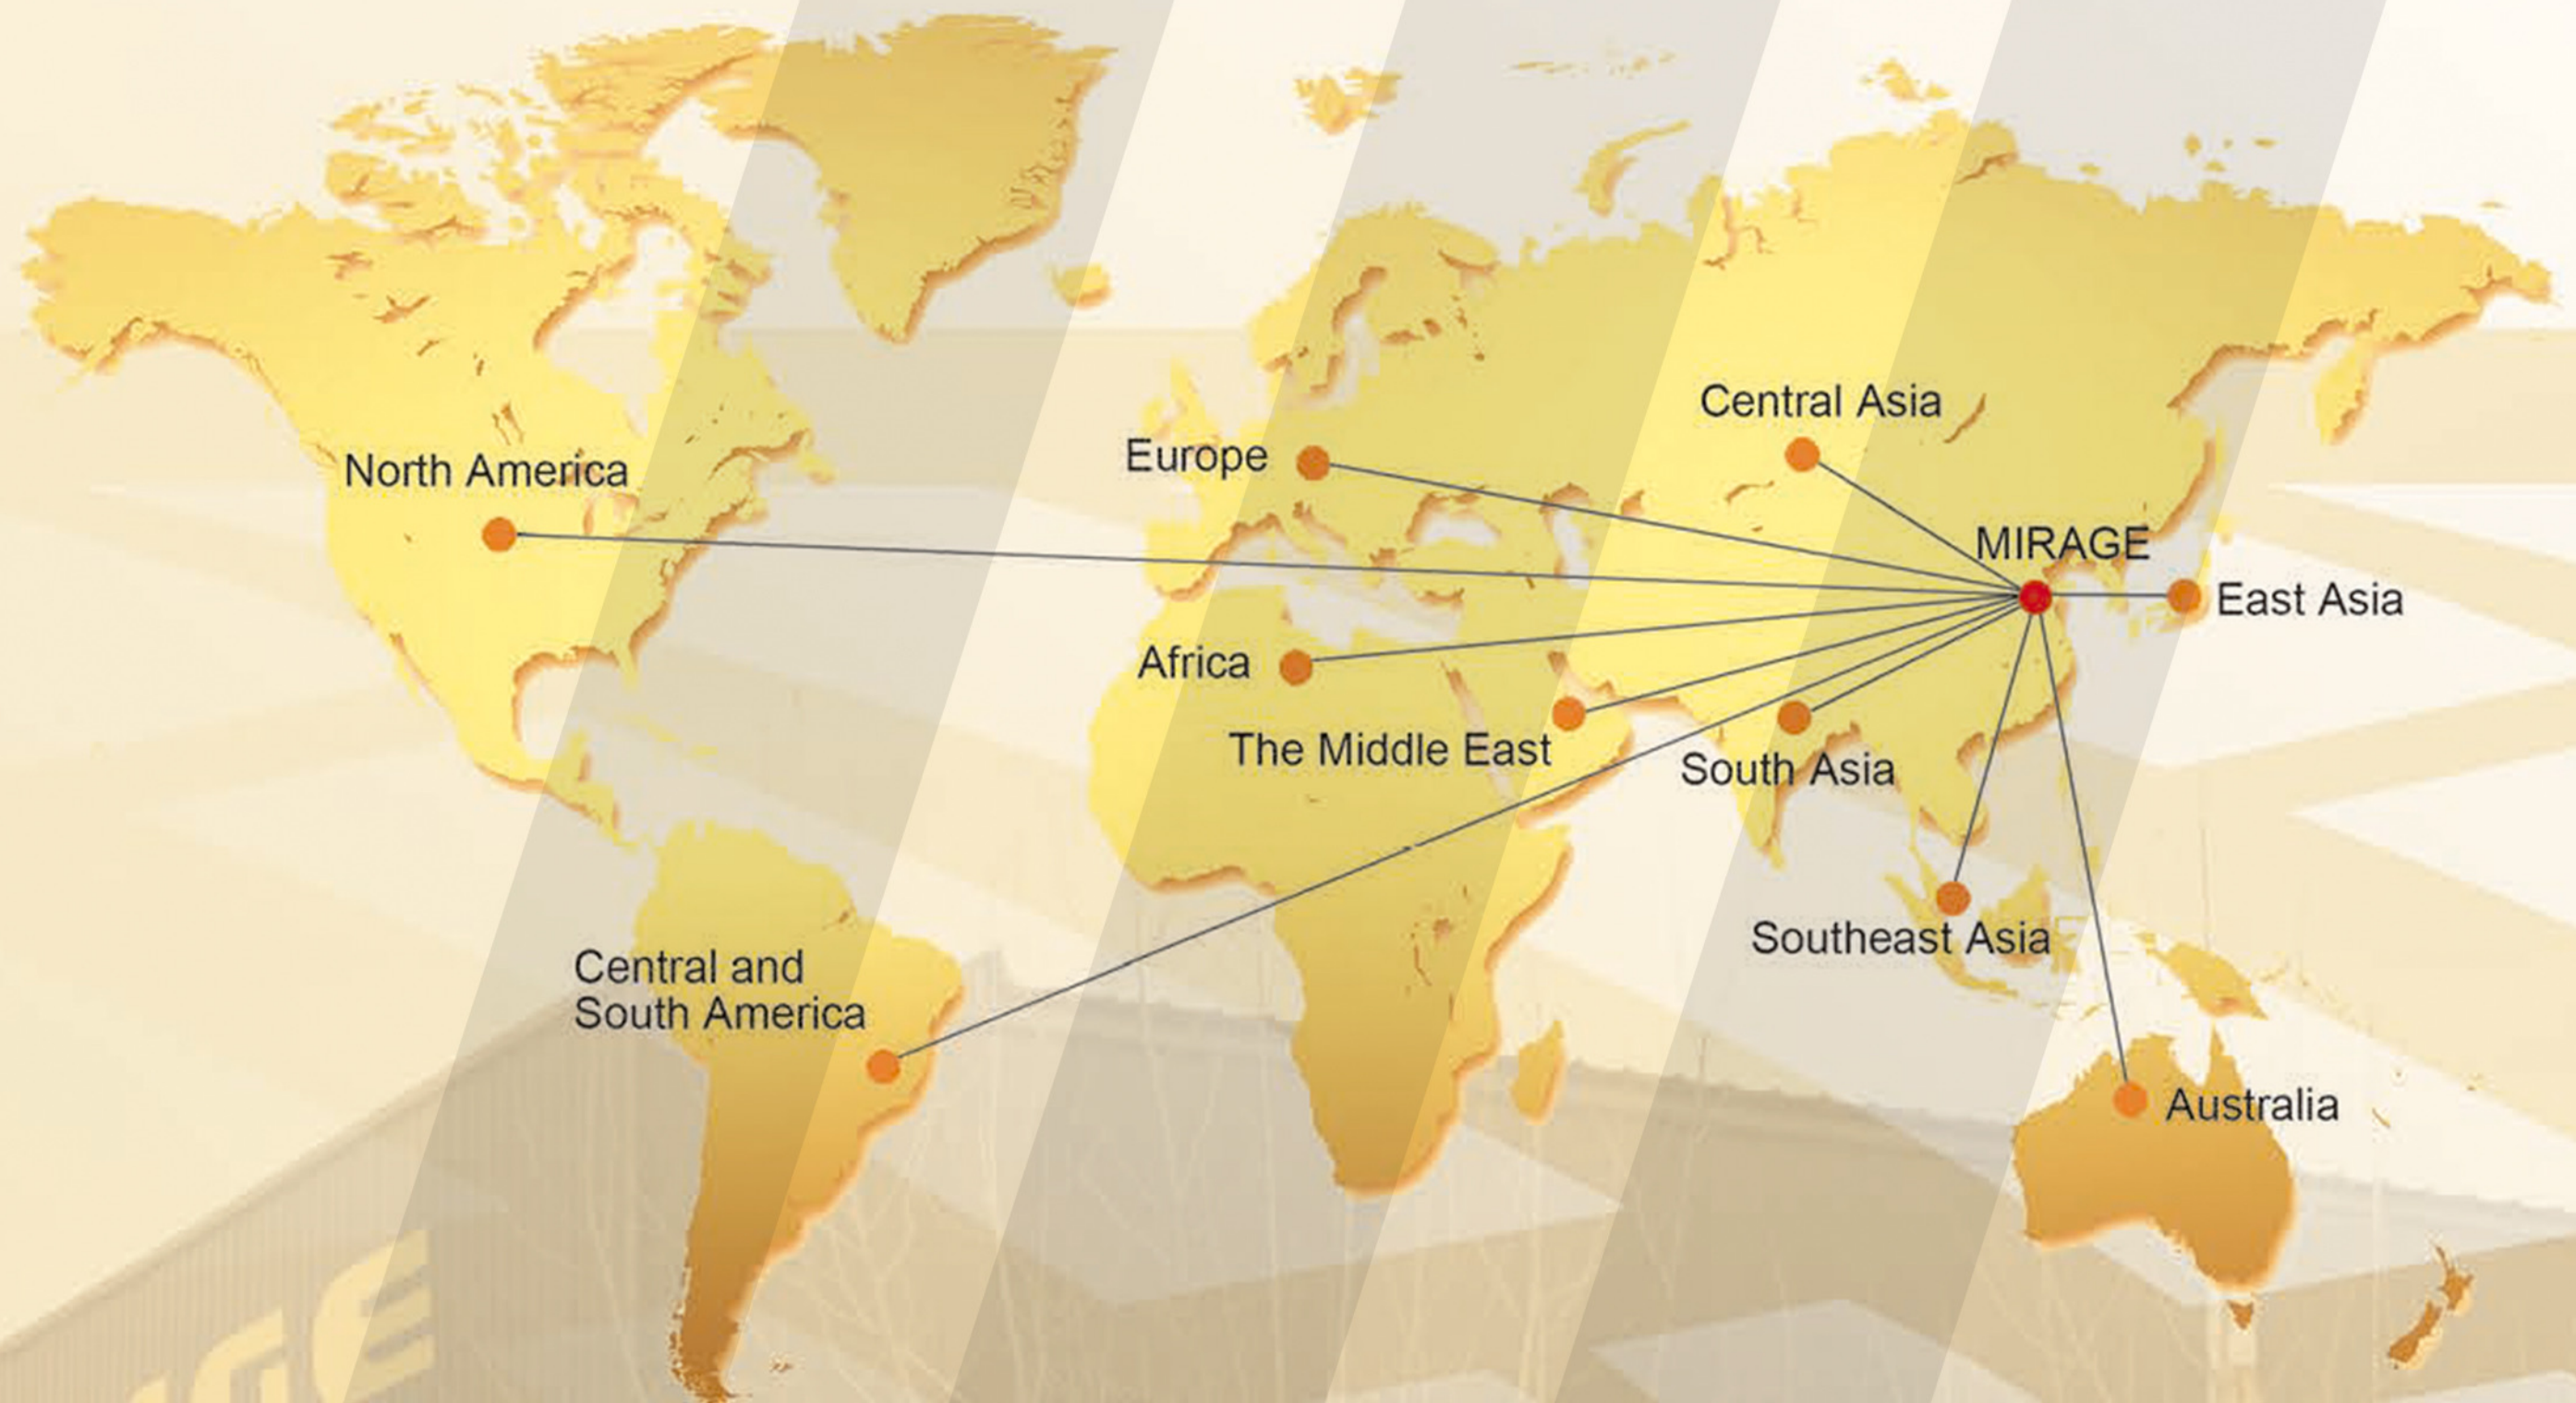

We export to more than 120 countries in the world

MIRAGE
RADIAL
PRTTERN
RANGE

POSITION

ROAD

LONG & REGIONAL HAUL

MIXED SERVICE

OFF ROAD




ALL POSITION




STEER/TRAILER



DRIVE

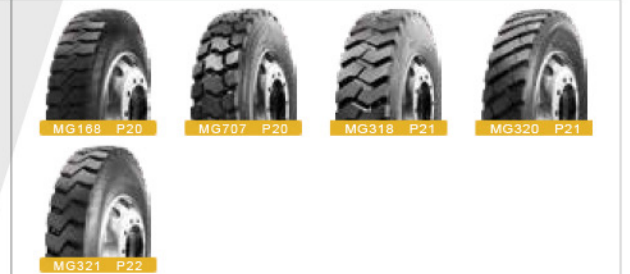

TRAILER

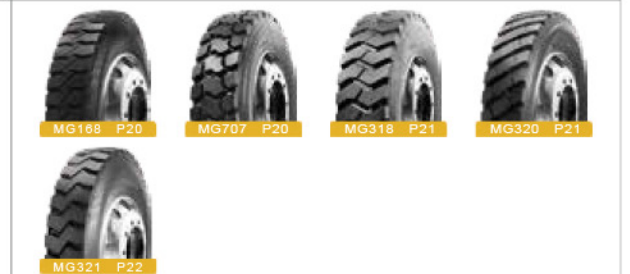



ALL POSITION



MG708

Features

- ▶ Three groove design with lugs
- ▶ Special tread compound
- ▶ Shoulder design with lugs and sipes

Benefits

- ▶ Provide outstanding wet performance
- ▶ Provide outstanding resistance to abrasion
- ▶ Provide excellent heat dissipation



MG117

Features

- ▶ Three zigzag grooves design with lugs
- ▶ Special tread compound
- ▶ Shoulder design with lugs and sipes

Benefits

- ▶ Provide excellent wet performance
- ▶ Provide outstanding resistance to abrasion
- ▶ Provide outstanding heat dissipation



FAR515

Features

- ▶ Special tread compound
- ▶ Three zigzag grooves
- ▶ Special groove design
- ▶ Optimized pattern design

Benefits

- ▶ Provide outstanding resistance to abrasion
- ▶ Provide good applicability for all position
- ▶ Deliver stone-ejecting property
- ▶ Provide outstanding resistance to irregular abrasion



FAR532

Features

- ▶ Special tread compound
- ▶ Rib pattern with horizontal siping and grooves

Benefits

- ▶ Lower fuel consumption
- ▶ Better handling and traction



Operation:

- Highways and long distance / Regional highways and city streets
- Well paved road conditions / Mainly used on paved roads, occasionally run on unpaved roads
- Constant and high speed with minimal braking and accelerating / Frequent braking, accelerating and turning

Size	MG708	MG117	FAR515	FAR532
9.00R20	144/142 K			
10.00R20	149/146 K			
11.00R20	152/149 K			
12.00R20	156/153 K			
11R22.5			144/142 M	144/142 M
11R22.5			148/145 L	146/143 L
12R22.5		152/149 L	152/149 L	
11R24.5				146/143 M
11R24.5				149/146 L
275/70R22.5			148/145 M	
295/75R22.5				144/141 M
295/75R22.5				146/143 L
295/80R22.5			152/149 M	
315/80R22.5			156/152 K	
285/75R24.5				144/141 M
285/75R24.5				147/144 L



ALL POSITION



FAR518

Features

- Special tread compound
- Three zigzag grooves
- Special groove design
- Optimized pattern design

Benefits

- Provide outstanding resistance to abrasion
- Provide good applicability for all position
- Deliver stone-ejecting property
- Provide outstanding resistance to irregular abrasion



MG599+

Features

- Four circumferential grooves
- Ladder arrangement design of longitudinal pattern
- Special tread compound
- Reinforced carcass and bead design

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Reduce irregular wear greatly
- Provide outstanding resistance to abrasion
- Ensure excellent handling and safe performance and provide outstanding loading capacity



FAL535

Features

- Special tread compound
- Rib pattern with horizontal siping and grooves

Benefits

- Better mileage and wear resistance
- Improved handling and wet grip



FAL536

Features

- Special tread compound
- Rib pattern with horizontal sipes and grooves

Benefits

- Better mileage and wear resistance
- Improved handling and wet grip



ALL POSITION



FAU512

Features

- Reinforced sidewalls
- Special compound for urban application
- New construction

Benefits

- Better protection against curbing and abrasions
- Improved mileage
- Improved retreadability

Size	FAR518	MG599+	FAL535	FAL536
8.25R15			129/127 L	
8.25R15TR			129/127 L	
10.00R15TR			137/135 L	
11.00R20		152/149 J		
8R19.5				124/122 M
9R22.5				136/134 M
10R22.5				141/139 M
215/75R17.5			135/133 J	
225/75R17.5	129/127 M			
235/75R17.5			143/141 J	
245/70R17.5	136/134 M			
245/70R17.5	143/141 J(146/146 F)			
225/70R19.5			128/126 M	
245/70R19.5			133/131 M	
245/70R19.5	136/134 M			
245/70R19.5	141/140 J			
265/70R19.5	140/138 M			
265/70R19.5	143/141 J			
285/70R19.5	146/144 L(144/142 M)			
285/70R19.5	150/148 J			
255/70R22.5			140/137 L	
275/70R22.5			152/148 J	
315/80R22.5				157/154 K

Size	FAU512
275/70R22.5	148/145 J



STEER/TRAILER



*MG330

Features

- Four wide circumferential grooves
- Special groove design
- Siped rib and shoulder design

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Deliver stone-ejecting property
- Provide excellent heat dissipation



*MG660

Features

- Four wide circumferential grooves
- Siped rib and shoulder design
- Reinforced carcass and wide tread
- Specially designed compound

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide excellent heat dissipation
- Ensure excellent handling and safe performance
- Deliver lower rolling resistance



*MG606

Features

- Four zigzag grooves
- Solid shoulder design
- Variable pitch design
- Specially designed compound

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Provide outstanding resistance to abrasion
- Reduce rolling noise greatly
- Deliver lower rolling resistance



*MG606+

Features


- Four zigzag grooves
- Solid shoulder design
- Variable pitch design
- Specially designed compound

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Provide outstanding resistance to abrasion
- Reduce rolling noise greatly
- Deliver lower rolling resistance



STEER/TRAILER



MG688

Features

- Four wide circumferential grooves
- Siped rib and shoulder design
- Specially designed compound

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide excellent heat dissipation
- Deliver lower rolling resistance



MG111

Features

- Solid rib design combined with multiple sipes
- Four wide circumferential grooves
- Solid shoulder design

Benefits

- Provide excellent heat dissipation and improved regular wear with lower resistance
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide outstanding resistance to abrasion



MG121

Features

- Four circumferential grooves
- Solid shoulder design
- Specially designed compound

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Provide outstanding resistance to abrasion
- Reduce rolling noise greatly
- Deliver lower rolling resistance



MG123

Features

- Four circumferential grooves
- Solid shoulder design
- Specially designed compound

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Provide outstanding resistance to abrasion
- Reduce rolling noise greatly
- Deliver lower rolling resistance

Size	MG330	MG660	MG606	MG606+	Remarks
9.00R20			144/142 K		The symbol of "*" represents patterns applicable for all position bus.
10.00R20			149/146 K		
11.00R20			152/149 K		
12.00R20			156/153 K		
11R22.5	148/145 M	148/145 M	148/145 M		
12R22.5	152/149 M	152/149 M			
13R22.5		156/152 L(154/151 M)			
215/75R17.5		135/133 J			
255/70R22.5		140/137 L			
295/80R22.5		152/149 M			
315/70R22.5		154/150 L(152/148 M)			
315/80R22.5		156/152 L(154/151 M)		156/152 L(154/151 M)	

Size	MG688	MG111	MG121	MG123
8.25R16LT			128/124 M	
11.00R20			152/149 K	152/149 K
9.5R17.5			143/141 J	
11R22.5		146/143 L		
11R24.5		146/143 M		
11R24.5		149/146 L		
215/75R17.5		135/133 L		
235/75R17.5		143/141 L		
225/70R19.5		128/126 L		
245/70R19.5		135/133 L		
255/70R22.5		140/137 L		
295/75R22.5		144/141 M		
295/75R22.5		146/143 L		
295/80R22.5	152/149 M		152/149 M	
315/70R22.5			154/150 L(152/148 M)	
315/80R22.5			156/152 L(154/151 M)	
285/75R24.5		144/141 M		
285/75R24.5		147/144 L		



STEER/TRAILER



MG124

Features

- Solid rib design combined with multiple sipes
- Four wide circumferencial grooves
- Solid shoulder design

Benefits

- Provide excellent heat dissipation and improved regular wear with lower resistance
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide outstanding resistance to abrasion



FSL129

Features

- Special tread compound
- Shoulder protection design

Benefits

- Lower fuel consumption
- Reduce uneven wear on shoulder



MG127

Features

- Solid rib design combined with multiple sipes
- Four wide circumferencial grooves
- Solid shoulder design

Benefits

- Provide excellent heat dissipation and improved regular wear with lower resistance
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide outstanding resistance to abrasion



MG680

Features

- Solid rib design combined with multiple sipes
- Four wide circumferencial grooves
- Solid shoulder design

Benefits

- Provide excellent heat dissipation and improved regular wear with lower resistance
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide outstanding resistance to abrasion

Size	MG124	FSL129	MG127	MG680
7.50R16LT			125/121 L	
11R22.5		144/142 M		
11R24.5		146/143 M		
295/75R22.5		144/141 M		
315/80R22.5	156/152 L(154/151 M)			156/152 L(154/151 M)
285/75R24.5		144/141 M		



DRIVE



MG122

Features

- Three circumferencial grooves
- Block pattern design
- Special tread compound
- Solid shoulder design

Benefits

- Ensure outstanding water evacuation, even pressure distribution and heat dissipation
- Provide excellent driving and braking force
- Provide outstanding resistance to puncture and tearing
- Provide outstanding resistance to abrasion



MG668

Features

- Special tread compound
- Four circumferencial grooves
- Deeper tread depth design
- Block pattern design

Benefits

- Provide outstanding resistance to puncture and tearing
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Improved mileage performance
- Provide excellent driving and braking force



MG628

Features

- Asymmetric lug design
- Block pattern design
- Four circumferencial grooves
- Reinforced carcass and bead design

Benefits

- Combine regular wear with excellent traction
- Provide excellent driving and braking force
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Ensure excellent handling and safe performance and provide outstanding loading capacity



MG607

Features

- Four circumferencial grooves
- Block pattern design
- Special tread compound
- Solid shoulder design

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide excellent driving and braking force
- Provide outstanding resistance to puncture and tearing
- Provide outstanding resistance to abrasion

Size	MG122	MG668	MG628	MG607
10.00R20		149/146 K		
12.00R24	160/157 K			160/157 K
11R22.5			148/145 M	
12R22.5			152/149 L	
13R22.5			156/152 L(154/151 M)	
215/75R17.5			135/133 J	
235/75R17.5			143/141 J	
295/80R22.5		152/149 M	152/149 M	
315/70R22.5			154/150 L(152/148 M)	
315/80R22.5	156/152 L(154/151 M)		156/152 L(154/151 M)	



Features

- ▶ Block pattern design
- ▶ Solid shoulder design
- ▶ Four wide circumferential grooves

Benefits

- ▶ Provide excellent driving and braking force
- ▶ Provide outstanding resistance to abrasion
- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation

MG312



Features

- ▶ Block pattern design
- ▶ Extra wide footprint
- ▶ Deeper tread depth design

Benefits

- ▶ Provide excellent driving and braking force
- ▶ Enhanced stability and resistance to abrasion
- ▶ Improved mileage performance

MG638



Features

- ▶ Block pattern design
- ▶ Extra wide footprint
- ▶ Deeper tread depth design

Benefits

- ▶ Provide excellent driving and braking force
- ▶ Enhanced stability and resistance to abrasion
- ▶ Improved mileage performance

MG505



Features

- ▶ Solid and wide shoulder with deep tread
- ▶ Stone ejectors

Benefits

- ▶ Better mileage
- ▶ Prevent stone drilling

FDL230



Features

- ▶ Deep groove with stone ejectors
- ▶ Open shoulder block pattern

Benefits

- ▶ Prevent stone drilling
- ▶ Improved traction

FDR233



Features

- ▶ Special tread compound
- ▶ Special drive tread design and optimised footprint
- ▶ New construction

Benefits

- ▶ Improved mileage
- ▶ Better traction and handling
- ▶ Even wear

FDR255



Features

- ▶ Block pattern design
- ▶ Open shoulder design
- ▶ Special tread compound

Benefits

- ▶ Provide excellent traction
- ▶ Improved heat dissipation to increase tire life
- ▶ Provide mileage performance

MG323



Features

- ▶ Asymmetric lug design
- ▶ Block pattern design
- ▶ Four circumferential grooves
- ▶ Reinforced carcass and bead design

Benefits

- ▶ Combine regular wear with excellent traction
- ▶ Provide excellent driving and braking force
- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity

MG326

Size	MG312	MG638	MG505	FDL230
10.00R20		149/146 K	149/146 K	
11R22.5				144/142 M
11R22.5	146/143 L	148/145 M		146/143 L
12R22.5		152/149 M		
11R24.5	146/143 M			146/143 L
11R24.5	149/146 L			149/146 L
295/75R22.5	144/141 M			144/141 M
295/75R22.5	146/143 L			146/143 L
285/75R24.5	144/141 M			144/141 L
285/75R24.5	147/144 L			147/144 L
315/70R22.5		154/150 L(152/148 M)		
315/80R22.5		156/152 L(154/151 M)		

Size	FDR233	FDR255	MG323	MG326
10R22.5	141/139 L			
11R22.5	146/143 L		146/143 L	
11R24.5			146/143 M	
11R24.5	149/146 L		149/146 L	
265/70R19.5		143/141 J		
295/75R22.5			144/141 M	
295/75R22.5			146/143 L	
295/80R22.5				152/149 M
315/70R22.5				154/150 L
315/80R22.5				156/152 L
285/75R24.5			144/141 M	
285/75R24.5			147/144 L	



MG328

Features

- ▶ Block pattern design
- ▶ Extra wide footprint
- ▶ Deeper tread depth design

Benefits

- ▶ Provide excellent driving and braking force
- ▶ Enhanced stability and resistance to abrasion
- ▶ Improved mileage performance



MG331

Features

- ▶ Block pattern design
- ▶ Solid shoulder design
- ▶ Four wide circumferential grooves

Benefits

- ▶ Provide excellent driving and braking force
- ▶ Provide outstanding resistance to abrasion
- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation

Size	MG328	MG331
315/80R22.5	156/152 L	156/152 L



MG022

Features

- ▶ Four zigzag grooves
- ▶ Extra wide footprint with square shoulder
- ▶ Special tread compound

Benefits

- ▶ Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- ▶ Enhanced stability and resistance to abrasion
- ▶ Provide outstanding resistance to abrasion



FTL311

Features

- ▶ Optimized pattern design
- ▶ Special groove design
- ▶ Reinforced carcass and wide tread
- ▶ Specially designed compound

Benefits

- ▶ Provide outstanding resistance to irregular abrasion
- ▶ Deliver stone-ejecting property
- ▶ Ensure excellent handling and safe performance
- ▶ Provide outstanding resistance to abrasion
- ▶ Deliver lower rolling resistance

Size	MG022	MG618	FTL311	FTL323
11R22.5		148/145 M		
12R22.5		152/149 M		
235/75R17.5	143/141 J			
295/75R22.5		144/141 M		
295/75R22.5		146/143 L		
385/55R22.5			160 K(158 L)	
385/65R22.5	160 K		160 K(158 L)	
425/65R22.5			165 K	
445/65R22.5			169 K	
ST235/85R16				129/125 L
ST235/85R16				129/125 L
ST235/85R16				132/127 L



MG618

Features

- ▶ Four circumferential grooves
- ▶ Special groove design
- ▶ Curved lug design

Benefits

- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation
- ▶ Deliver stone-ejecting property
- ▶ Deliver excellent driving and braking force



FTL323

Features

- ▶ Special tread compound

Benefits

- ▶ Improved mileage



TRAILER



FTL325

Features

- ▶ Special tread compound

Benefits

- ▶ Better mileage



FTL331

Features

- ▶ Special tread compound
- ▶ Rib pattern with siping

Benefits

- ▶ Lower fuel consumption
- ▶ Better wet grip performance and lateral stability



FTL357

Features

- ▶ Optimization of the ratio of tread block
- ▶ Low rolling resistance tire tread compound formulation
- ▶ Multiple angle groove wall and stone kicker design
- ▶ Extra wide ground contact

Benefits

- ▶ Prevent uneven wear
- ▶ Provide better fuel efficiency
- ▶ Deliver stone ejecting property
- ▶ Provide excellent longer wear performance and high mileage



MG126

Features

- ▶ Four circumferential groove designs
- ▶ Reduced tire weight

Benefits

- ▶ Improved antiskid performance
- ▶ Deliver rolling resistance and lower fuel consumption

Size	FTL325	FTL331	FTL357	MG126
11R22.5		144/142 M		146/143 L
11R24.5		146/143 M		149/146 L
295/75R22.5		144/141 M		146/143 L
285/75R24.5		144/141 M		147/144 L
435/50R19.5			160 J	
ST225/75R15	121/117 M			



M



Mixed Service



Operation:

- Frequently used on and off roads
- Heavier loads
- Construction site

Mixed Service **M**



ALL POSITION



MG702

Features

- Three zigzag grooves
- Combination of rib and lug design
- Shoulder design with lugs

Benefits

- Provide excellent anti-sidesliping performance and ensure excellent water evacuation
- Deliver outstanding traction and handling
- Provide excellent heat dissipation



MG011

Features

- Three zigzag grooves
- Combination of rib and lug design
- Shoulder design with lugs

Benefits

- Provide excellent anti-sidesliping performance and ensure excellent water evacuation
- Deliver outstanding traction and handling
- Provide excellent heat dissipation



MG307

Features

- Three zigzag grooves
- Reinforced carcass and bead design
- Special groove design
- Shoulder design with lugs

Benefits

- Provide excellent anti-sidesliping performance and ensure excellent water evacuation
- Ensure excellent handling and safe performance and provide outstanding loading capacity
- Deliver stone-ejecting property
- Provide excellent heat dissipation



FAM517

Features

- Three zigzag grooves
- Combination of rib and lug design
- Shoulder design with lugs

Benefits

- Provide excellent anti-sidesliping performance and ensure excellent water evacuation
- Deliver outstanding traction and handling
- Provide excellent heat dissipation



ALL POSITION



Mixed Service **M**



FAM537

Features

- Zigzag pattern
- Special tread compound

Benefits

- Improved traction and handling in mixed service application
- Better resistance to chipping

Size	MG702	MG011	MG307	FAM517
6.50R16LT	110/105 K			
7.00R16LT	118/114 M			
7.50R16LT		122/118 M		
8.25R16LT	128/124 M			
8.25R20	139/137 L			
9.00R20	144/142 K			
10.00R20	149/146 K		149/146 K	
11.00R20	152/149 K		152/149 K	
12.00R20	156/153 K		156/153 K	
12.00R24	160/157 K			160/157 K
11R22.5	148/145 M			148/145 K
12R22.5	152/149 M		152/149 L	152/149 K
13R22.5	156/152 L(154/151 M)			
11R24.5	149/146 L			
295/80R22.5				152/149 K
315/80R22.5		156/152 L(154/151 M)		156/152 K

Size	FAM537
11R22.5	146/143 K
11R24.5	149/146 K

Mixed Service **M**



DRIVE



MG768

Features

- Special tread compound
- Block pattern design
- Extra wide footprint with square shoulder
- Reinforced carcass and bead design

Benefits

- Provide outstanding resistance to puncture and tearing
- Provide excellent driving and braking force
- Enhanced stability and resistance to abrasion
- Ensure excellent handling and safe performance and provide outstanding loading capacity



MG706

Features

- Lug and block pattern design
- Special tread compound

Benefits

- Improved traction, driving and braking performance
- Provide outstanding resistance to puncture and tearing



MG701

Features

- Special tread compound
- Lug and block pattern design
- Siped pattern and shoulder design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance
- Provide excellent heat dissipation



MG313

Features

- Lug and block pattern design
- Special groove design
- Special tread compound
- Open shoulder design

Benefits

- Improved traction, driving and braking performance
- Deliver stone-ejecting property
- Provide outstanding resistance to puncture and tearing
- Provide excellent heat dissipation



MG322

Features

- Special tread compound
- Lug and special block pattern design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance



MG303

Features

- Inter-connected block pattern
- Reinforced carcass and bead design
- Special groove design

Benefits

- Provide excellent driving force, cutting resistance and even wear
- Ensure excellent handling and safe performance and provide outstanding loading capacity
- Deliver stone-ejecting property



DRIVE



Mixed Service **M**



MG729

Features

- Special tread compound
- Lug and special block pattern design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance



FDM216

Features

- Deep tread block pattern
- Special groove design
- Tread compound for mixed service


Benefits

- Improved traction
- Self cleaning
- Better resistance to chipping

Size	MG768	MG706	MG701	MG313
7.00R16LT		118/114 M		
7.50R16LT		122/118 M		122/118 M
8.25R16LT		128/124 M		128/124 M
8.25R20		139/137 L		139/137 K
9.00R20		144/142 K	144/142 J	144/142 K
10.00R20	149/146 K	149/146 K	149/146 K	149/146 K
11.00R20	152/149 J	152/149 K	152/149 K	152/149 K
12.00R20	156/153 J	156/153 K	156/153 K	156/153 K
12R22.5	152/149 M		152/149 M	
13R22.5	156/152 L(154/151 M)			
315/80R22.5	156/152 L(154/151 M)			

Size	MG322	MG729	MG303	FDM216
7.00R16LT			118/114 K	
7.50R16LT			122/118 J	
8.25R16LT			128/124 J	
8.25R20			139/137 K	
9.00R20			144/142 J	
10.00R20			149/146 K	
11.00R20			152/149 J	
12.00R20			156/153 J	
12.00R24	160/157 K	160/157 K		
11R22.5		148/145 L		148/145 G
11R22.5				146/143 J
315/80R22.5	156/152 L(154/151 M)			

Mixed Service



DRIVE



TRAILER



Mixed Service



MG325

Features

- Special tread compound
- Lug and special block pattern design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance



MG768W

Features

- Large block & Deep groove design
- Open shoulder design
- Optimized tread compound
- Special horizontal small groove design

Benefits

- Provides excellent traction and braking force
- Provides good traction and self-cleaning performance
- Provides excellent tear resistance, cut resistance and snow traction
- Improve snow traction performance



FTM313

Features


- Special tread compound
- Lug and block pattern design
- Special groove design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance
- Deliver stone-ejecting property

Size	MG325	MG768W
12.00R24	160/157 K	
315/80R22.5		156/152 L(154/151 M)

Size	FTM313
385/65R22.5	160 K(158 L)

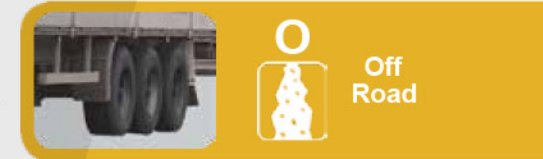

MG168

Features

- Special tread compound
- Lug and special block pattern design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance



MG707

Features

- Special tread compound
- Block pattern design
- Reinforced carcass and bead design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance
- Ensure excellent handling and safe performance and provide outstanding loading capacity


Size	MG168	MG707
7.00R16LT	118/114 K	
7.50R16LT	122/118 K	
8.25R16LT	128/124 K	
8.25R20	139/137 C	
9.00R20	144/142 C	
10.00R20	149/146 C	149/146 K
11.00R20		152/149 K
12.00R20	156/153 C	156/153 K



Operation:

- Mostly used on rugged terrain like mining or heavy construction
- Heavier loads
- High risk of damage from road conditions

Off Road



DRIVE/TRAILER



DRIVE/TRAILER



Off Road



MG318

Features

- Lug and block pattern design
- Special tread compound
- Reinforced carcass and bead design

Benefits

- Improved traction, driving and braking performance
- Provide outstanding resistance to puncture and tearing
- Ensure excellent handling and safe performance and provide outstanding loading capacity



MG321

Features

- Lug and block pattern design
- Special tread compound
- Reinforced carcass and bead design

Benefits

- Improved traction, driving and braking performance
- Provide outstanding resistance to puncture and tearing
- Ensure excellent handling and safe performance and provide outstanding loading capacity



MG320

Features

- Special tread compound
- Lug and block pattern design
- Reinforced carcass and bead design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance
- Ensure excellent handling and safe performance and provide outstanding loading capacity

Size	MG318	MG320
8.25R20	139/137 C	
9.00R20	144/142 C	
10.00R20	149/146 C	
11.00R20	152/149 C	
12.00R20	156/153 C	
295/80R22.5	152/149 C	152/149 C


Size	MG321
11.00R20	152/149 C
12.00R20	156/153 C

PRODUCT RANGE



DIMENSION	MG708	MG117	FAR532	FAR515	FAR518	MG599+	FAL535	FAL536	FAU512	MG330	MG660	MG606	MG606+	MG688	MG111
8.25R15(TR) 14PR							129/127 L								
8.25R16LT 16PR															
9.00R20 16PR	144/142 K											144/142 K			
10.00R15TR 14PR							137/135 L								
10.00R20 18PR	149/146 K											149/146 K			
11.00R20 18PR	152/149 K					152/149 J						152/149 K			
12.00R20 20PR	156/153 K											156/153 K			
9.5R17.5 16PR															
8R19.5 12PR								124/122 M							
9R22.5 14PR								136/134 M							
10R22.5 14PR								141/139 M							
11R22.5 14PR			144/142 M	144/142 M											
11R22.5 16PR			146/143 L	148/145 L						148/145 M	148/145 M	148/145 M			146/143 L
12R22.5 18PR		152/149 L		152/149 L						152/149 M	152/149 M				
13R22.5 20PR											156/152L(154/151M)				
11R24.5 14PR			146/143 M												146/143 M
11R24.5 16PR			149/146 L												
215/75R17.5 16PR							135/133 J				135/133 J				135/133 L
225/75R17.5 14PR					129/127 M										
235/75R17.5 16PR								143/141 J							143/141 L
245/70R17.5 16PR					136/134 M										
245/70R17.5 18PR					146/146F(143/141J)										
225/70R19.5 14PR							128/126 M								128/126 L
245/70R19.5 14PR							133/131 M								
245/70R19.5 16PR					136/134 M										135/133 L
245/70R19.5 18PR					141/140 J										
265/70R19.5 16PR					140/138 M										
265/70R19.5 18PR					143/141 J										
285/70R19.5 16PR					146/144L(144/142M)										
285/70R19.5 18PR					150/148 J										
255/70R22.5 16PR							140/137 L				140/137 L				140/137 L
275/70R22.5 16PR				148/145 M					148/145 J						
275/70R22.5 18PR							152/148 J								
295/75R22.5 14PR			144/141 M												144/141 M
295/75R22.5 16PR			146/143 L												146/143 L
295/80R22.5 18PR				152/149 M							152/149 M			152/149 M	
315/70R22.5 20PR											154/150L(152/148M)				
315/80R22.5 20PR				156/152 K				157/154 K			156/152L(154/151M)		156/152L(154/151M)		
285/75R24.5 14PR			144/142 M												144/141 M
285/75R24.5 16PR			147/144 L												147/144 L

PRODUCT RANGE

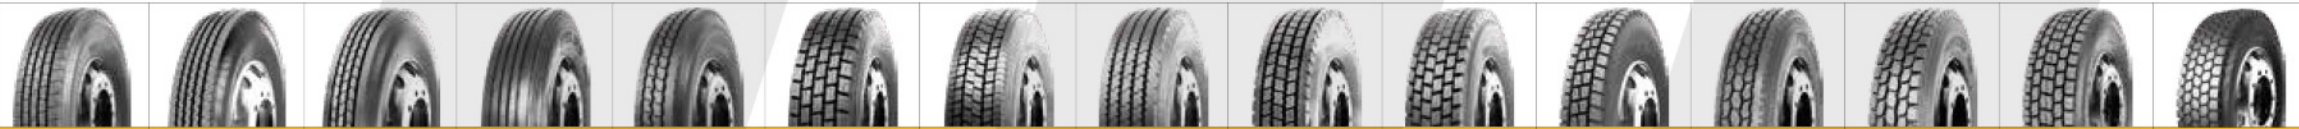



DIMENSION	MG121	MG123	MG124	FSL129	MG122	MG668	MG628	MG607	MG312	MG638	MG505	FDL230	FDR233	FDR255	HF323
8.25R16LT 16PR	128/124 M														
11.00R20 18PR	152/149 K	152/149 K													
9.5R17.5 16PR	143/141 J														
10.00R20 18PR						149/146 K				149/146 K	149/146 K				
12.00R24 20PR					160/157 K			160/157 K							
10R22.5 14PR													141/139 L		
11R22.5 14PR			144/142 M									144/142 M			
11R22.5 16PR							148/145 M		146/143 L	148/145 M		146/143 L	146/143 L		146/143 L
12R22.5 18PR							152/149 L			152/149 M					
13R22.5 20PR							156/152L(154/151 M)								
11R24.5 14PR			146/143 M						146/143 M			146/143 L			146/143 M
11R24.5 16PR									149/146 L			149/146 L	149/146 L		149/146 L
215/75R17.5 16PR							135/133 J								
235/75R17.5 16PR							143/141 J								
435/50R19.5 20PR															
265/70R19.5 18PR														143/141 J	
295/75R22.5 14PR			144/141 M						144/141 M			144/141 M			144/141 M
295/75R22.5 16PR									146/143 L			146/143 L			146/143 L
295/80R22.5 18PR	152/149 M					152/149 M	152/149 M								
315/70R22.5 20PR	154/150L(152/148 M)						154/150L(152/148 M)			154/150L(152/148 M)					
315/80R22.5 20PR	156/152L(154/151 M)		156/152L(154/151 M)		156/152L(154/151 M)		156/152L(154/151 M)			156/152L(154/151 M)					
385/55R22.5 20PR															
385/65R22.5 20PR															
425/65R22.5 20PR															
445/65R22.5 20PR															
285/75R24.5 14PR			144/142 M						144/141 M			144/142 L			144/141 M
285/75R24.5 16PR									147/144 L			147/144 L			147/144 L

PRODUCT RANGE




DIMENSION	MG022	MG618	FTL311	FTL323	FTL325	FTL331	FTL357	MG126	MG127	MG680	MG326	MG328	MG331
7.50R16 16PR									125/121 L				
11R22.5 14PR						144/142 M							
11R22.5 16PR		148/145 M						146/143 L					
12R22.5 18PR		152/149 M											
11R24.5 14PR						146/143 M							
11R24.5 16PR								149/146 L					
235/75R17.5 16PR	143/141 J												
435/50R19.5 20PR							160 J						
295/75R22.5 14PR		144/141 M				144/141 M							
295/75R22.5 16PR		146/143 L						146/143 L					
295/80R22.5 18PR											152/149 M		
315/70R22.5 20PR											154/150 L		
315/80R22.5 20PR										156/152 L(154/151 M)	156/152 L	156/152 L	156/152 L
385/55R22.5 20PR			160 K(158 L)										
385/65R22.5 20PR	160 K		160 K(158 L)										
425/65R22.5 20PR			165 K										
445/65R22.5 20PR			169 K										
285/75R24.5 14PR						144/142 M							
285/75R24.5 16PR								147/144 L					
ST225/75R15 12PR					121/117 M								
ST235/85R16 12PR				129/125 L									
ST235/85R16 14PR				129/125 L									
ST235/85R16 14PR				132/127 L									

PRODUCT RANGE

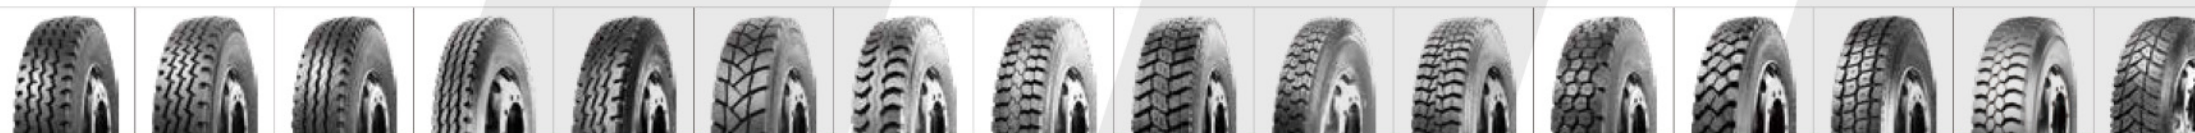

DIMENSION	MG702	MG011	MG307	FAM517	FAM537	MG768	MG706	MG701	MG313	MG322	MG729	MG303	FDM216	FTM313	MG325	MG768W		
6.50R16LT 12PR	113/110 K																	
7.00R16LT 14PR	118/114 M						118/114 M					118/114 K						
7.50R16LT 14PR	122/118 M						122/118 M					122/118 J						
8.25R16LT 16PR	128/124 M						128/124 M		128/124 L			128/124 J						
8.25R20 16PR	139/137 L						139/137 L		139/137 K			139/137 K						
9.00R20 16PR	144/142 K						144/142 J	144/142 J	144/142 K			144/142 J						
10.00R20 18PR	149/146 K		149/146 K			149/146 K	149/146 K	149/146 K	149/146 K			149/146 K						
11.00R20 18PR	152/149 K		152/149 K			152/149 J	152/149 K	152/149 K	152/149 K			152/149 J						
12.00R20 20PR	156/153 K		156/153 K			156/153 J	156/153 K	156/153 K	156/153 K			156/153 J						
12.00R24 20PR	160/157 K			160/157 K						160/157 K	160/157 K				160/157 K			
11R22.5 16PR	148/145 M			148/145 K	146/143 K						148/145 L		148/145 G					
11R22.5 16PR													146/143 J					
12R22.5 18PR	152/149 M		152/149 L	152/149 K		152/149 M		152/149 M										
13R22.5 20PR	156/152L(154/151M)					156/152L(154/151M)												
11R24.5 16PR	149/146 L					149/146 K												
295/80R22.5 18PR				152/149 K														
315/80R22.5 20PR		156/152L(154/151M)		156/152 K		156/152L(154/151M)											156/152L(154/151M)	
385/65R22.5 20PR														160 K(158 L)				

PRODUCT RANGE




DIMENSION	MG168	MG707	MG318	MG320	MG321															
7.00R16LT 14PR	118/114 K																			
7.50R16LT 14PR	122/118 K																			
8.25R16LT 16PR	128/124 K																			
8.25R20 16PR	139/137 C		139/137 C																	
9.00R20 16PR	144/142 C		144/142 C																	
10.00R20 18PR	149/146 C	149/146 K	149/146 C																	
11.00R20 18PR		152/149 K	152/149 C		152/149 C															
12.00R20 20PR	156/153 C	156/153 K	156/153 C		156/153 C															
295/80R22.5 18PR			152/149 C	152/149 C																

Technical File

Size	PR	Width	A/R	Rim	LOAD INDEX	SPEED RATING	PATTERN	M+S	APPLICATION	STANDARD RIM	MAX LOAD(KG) SINGLE	MAX LOAD(KG) DUAL	MAX PRESSURE(KPA) SINGLE	MAX PRESSURE(KPA) DUAL	TREAD DEPTH (mm)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)
385/65R22.5	20	385	65	22.5	160(158)	K(L)	FTL311	M+S	L&R	12.25	4500	-	900	-	15.5	386	996
385/65R22.5	20	385	65	22.5	160	K	MG022	M+S	L&R	11.75	4500	-	900	-	17	389	1072
385/65R22.5	20	385	65	22.5	160(158)	K(L)	FTL311	M+S	L&R	11.75	4500	-	900	-	16	389	1072
385/65R22.5	20	385	65	22.5	160(158)	K(L)	FTM313	M+S	M	11.75	4500	-	900	-	18.5	389	1072
425/65R22.5	20	425	65	22.5	165	K	FTL311	M+S	L&R	12.25	5150	-	825	-	16	422	1124
445/65R22.5	20	445	65	22.5	169	K	FTL311	M+S	L&R	13.00	5800	-	900	-	16	444	1150
285/75R24.5	14	285	75	24.5	144/141	M	MG111		L&R	8.25	2800	2575	780	760	15.5	283	1050
285/75R24.5	14	285	75	24.5	144/141	M	MG312		L&R	8.25	2800	2575	780	760	22	283	1056
285/75R24.5	14	285	75	24.5	144/141	L	FDL230	M+S	L&R	8.25	2800	2575	780	760	21.5	283	1062
285/75R24.5	14	285	75	24.5	144/141	M	FAR532	M+S	L&R	8.25	2800	2575	780	760	15	283	1050
285/75R24.5	14	285	75	24.5	144/141	M	FSL129	M+S	L&R	8.25	2800	2575	780	760	15	283	1050
285/75R24.5	14	285	75	24.5	144/141	M	FTL331	M+S	L&R	8.25	2800	2575	780	760	11	283	1050
285/75R24.5	14	285	75	24.5	144/141	M	MG323	M+S	L&R	8.25	2800	2575	780	760	22	283	1062
285/75R24.5	16	285	75	24.5	147/144	L	MG111		L&R	8.25	3075	2800	830	830	15.5	283	1050
285/75R24.5	16	285	75	24.5	147/144	L	MG312		L&R	8.25	3075	2800	830	830	22	283	1056
285/75R24.5	16	285	75	24.5	147/144	L	FDL230	M+S	L&R	8.25	3075	2800	830	830	21.5	283	1062
285/75R24.5	16	285	75	24.5	147/144	L	FAR532	M+S	L&R	8.25	3075	2800	830	830	15	283	1050
285/75R24.5	16	285	75	24.5	147/144	L	MG323	M+S	L&R	8.25	3075	2800	830	830	22	283	1062
285/75R24.5	16	285	75	24.5	147/144	L	MG126	M+S	L&R	8.25	3075	2800	830	830	10	283	1050
ST225/75R15	12	225	75	15	121/117	M	FTL325	M+S	L&R	6J	1450	1285	660	660	10	223	719
ST235/65R16	12	235	65	16	129/125	L	FTL323	M+S	L&R	6.50J	1850	1650	660	660	9.5	235	808
ST235/65R16	14	235	65	16	129/125	L	FTL323	M+S	L&R	6.50J	1850	1650	780	780	9.5	235	806
ST235/65R16	14	235	65	16	132/127	L	FTL323	M+S	L&R	6.50J	2000	1750	780	780	9.5	235	806

Technical File

Size	PR	Width	A/R	Rim	LOAD INDEX	SPEED RATING	PATTERN	M+S	APPLICATION	STANDARD RIM	MAX LOAD(KG) SINGLE	MAX LOAD(KG) DUAL	MAX PRESSURE(KPA) SINGLE	MAX PRESSURE(KPA) DUAL	TREAD DEPTH (mm)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)	

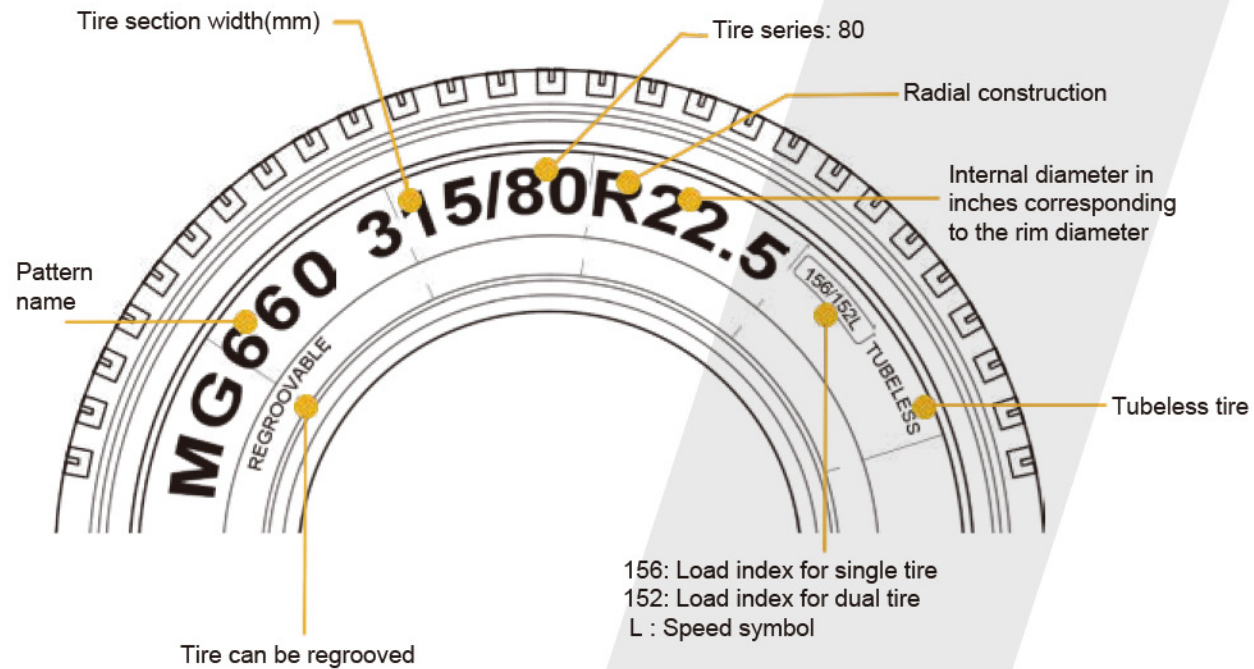

Refer to the Speed Symbols and Load Capacity Index tables below



Before fitting, it is essential to check the different markings to ensure that the tires meet the maximum load and speed possibilities and/or the regulations in force

Speed Symbols

SI	km/h
B	50
C	60
D	65
E	70
F	80
G	90
J	100
K	110
L	120
M	130
N	140
P	150
Q	160
R	170


Load Capacity Index

LI	KG	LI	KG	LI	KG
115	1215	136	2240	157	4125
116	1250	137	2300	158	4250
117	1285	138	2360	159	4375
118	1320	139	2430	160	4500
119	1360	140	2500	161	4625
120	1400	141	2575	162	4750
121	1450	142	2650	163	4875
122	1500	143	2725	164	5000
123	1550	144	2800	165	5150
124	1600	145	2900	166	5300
125	1650	146	3000	167	5450
126	1700	147	3075	168	5600
127	1750	148	3150	169	5800
128	1800	149	3250	170	6000
129	1850	150	3350	171	6150
130	1900	151	3450	172	6300
131	1950	152	3550	173	6500
132	2000	153	3650	174	6700
133	2060	154	3750	175	6900
134	2120	155	3875	176	7100
135	2180	156	4000	177	7300

Important instructions for safe inflation

Over-inflation reduces:


- Comfort
- Grip
- Braking distance
- Tire life span, particularly on drive axle tires
- Safety



Over-inflation


Under-inflation leads to:

- Reduced vehicle handling and safety
- A reduction in casing retreadability
- An increase of rolling resistance consequently of fuel consumption



Under-inflation

Effect of inflation pressure on tire life

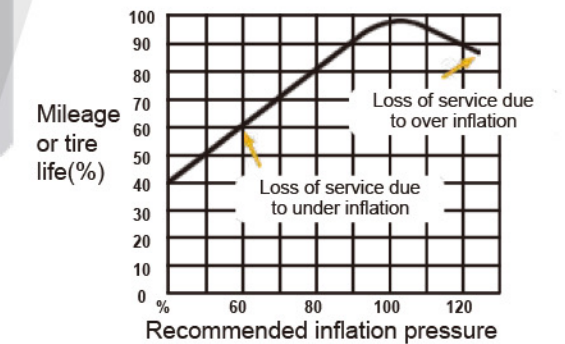

ADVICE BEFORE INFLATION

- 1 Weigh your vehicle and its load, axle by axle, to determine tire pressure
- 2 Measure the pressure when cold (when the vehicle has been stationary for several hours): pressures must be checked at regular intervals and during each service
- 3 Important safety instruction: pressure increases when the vehicle is in motion, never reduce the pressure of a hot tire
- 4 Pressure gauges: must be accurate, handled with care and calibrated regularly



Caution: Driving with insufficient pressure can damage your tires. Have your tires fully checked over by an expert

