

# ROCKBUSTER®

LLANTAS INDUSTRIALES Y AGRICULTURA



*Tire Direct*   
La nueva generación






GENERAL MANAGER



## FACTORY ENVIRONMENT

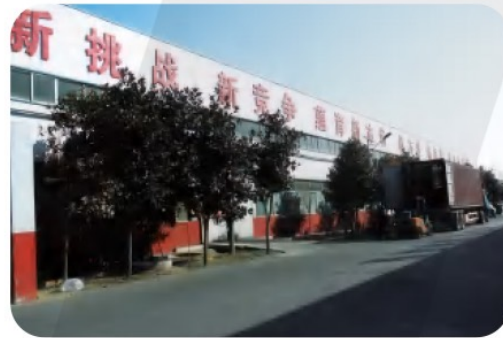

**Tire Direct**  
La nueva generación



## MAIN PRODUCTS

- 1-12 ● **OTR TYRE**
- 13-16 ● **FORKLIFT TYRE**
- 17-24 ● **SPECIALITY IND TYRE**
- 25-32 ● **SUPER SOLID TYRE**
- 33-46 ● **AGRICULTURAL TYRE**
- 47-52 ● **MINING TYRE**
- 53-56 ● **INDIAN PATTERNS TYRE**
- 57-64 ● **TRUCK TYRE**

## PRODUCT BRANDS

**ROCKBUSTER<sup>®</sup>**

**ROADBUSTER<sup>®</sup>**

**HIMILE<sup>™</sup>**

 **钢铁轮胎**  
STEEL TYRES

 **欧美亚**

 **菲力得**

## CERTIFICATES



**NOM**

**SGS**

**REACH  
SVHC**



**SMITHERS  
RAPRA**

**Tire Direct**  
La nueva generación





# OTR TYRE



*Tire Direct*   
La nueva generación



# H108A

L-3/E-3 GENERAL BLOCK (S TREAD)

Specially desinged for cut and heat resistant compound.  
Regular type of tread pattern suitable for hard rock surface and haulage service.



| Size         | PR | T.D.<br>(mm) | S.R.      | S.W.<br>(mm) | O.D.<br>(mm) | Max Loading (kg)            |        | Pressure (kpa)            |        | Type  | Code                |
|--------------|----|--------------|-----------|--------------|--------------|-----------------------------|--------|---------------------------|--------|-------|---------------------|
|              |    |              |           |              |              | 50km/h                      | 10km/h | 50km/h                    | 10km/h |       |                     |
| 14.00-24     | 16 | 25           | 10.0      | 375          | 1370         | 4000                        | 7300   | 375                       | 550    | TT/TL | H108A<br>L-3<br>E-3 |
|              | 20 |              |           |              |              | 4625                        | 8500   | 475                       | 700    |       |                     |
|              | 24 |              |           |              |              | 5150                        | 9500   | 575                       | 850    |       |                     |
|              | 28 |              |           |              |              | 5600                        | 10000  | 650                       | 925    |       |                     |
| 16.00-24     | 20 | 28           | 11.25/2.0 | 430          | 1495         | 5450                        | 9750   | 400                       | 550    |       |                     |
|              | 24 |              |           |              |              | 6000                        | 10600  | 475                       | 650    |       |                     |
|              | 28 |              |           |              |              | 6700                        | 11500  | 575                       | 750    |       |                     |
|              | 32 |              |           |              |              | 7300                        | 12500  | 650                       | 875    |       |                     |
| 17.5-25      | 16 | 28           | 14.00/1.5 | 445          | 1350         | 4250                        | 7300   | 300                       | 475    |       |                     |
|              | 20 |              |           |              |              | 5000                        | 8250   | 400                       | 575    |       |                     |
| 20.5-25      | 20 | 30           | 17.00/2.0 | 520          | 1490         | 6000                        | 9500   | 325                       | 450    |       |                     |
|              | 24 |              |           |              |              | 6700                        | 10300  | 400                       | 525    |       |                     |
|              | 28 |              |           |              |              | 7500                        | 11500  | 475                       | 625    |       |                     |
| 23.5-25      | 20 | 33           | 19.50/2.5 | 595          | 1615         | 7300                        | 10900  | 300                       | 375    |       |                     |
|              | 24 |              |           |              |              | 8000                        | 12500  | 350                       | 475    |       |                     |
|              | 28 |              |           |              |              | 8750                        | 13600  | 400                       | 550    |       |                     |
| 26.5-25      | 28 | 35           | 22.00/3.0 | 675          | 1750         | 10000                       | 15500  | 350                       | 475    |       |                     |
|              | 32 |              |           |              |              | 11200                       | 17000  | 425                       | 550    |       |                     |
| 29.5-25      | 28 | 38           | 25.00/3.5 | 750          | 1875         | 11500                       | 17500  | 325                       | 425    |       |                     |
|              | 34 |              |           |              |              | 12500                       | 19000  | 375                       | 500    |       |                     |
| Size         | PR | T.D.<br>(mm) | S.R.      | S.W.<br>(mm) | O.D.<br>(mm) | Max Loading (kg)<br>@10km/h |        | Pressure (kpa)<br>@10km/h |        | Type  | Code                |
| 16/70-24     | 14 | 20           | 13(SDC)   | 410          | 1175         | 5600                        |        | 450                       |        | TT    | H108A<br>L-3<br>E-3 |
| 16/70-20     | 14 | 30           | 13(SDC)   | 410          | 1150         | 5150                        |        | 450                       |        |       |                     |
|              | 18 |              |           |              |              | 5800                        |        | 550                       |        |       |                     |
| 16/70-20     | 14 | 20           | 13(SDC)   | 410          | 1150         | 5150                        |        | 450                       |        |       |                     |
|              | 18 |              |           |              |              | 5800                        |        | 550                       |        |       |                     |
| 16/70-20     | 14 | 22           | 13(SDC)   | 410          | 1050         | 5150                        |        | 450                       |        |       |                     |
|              | 18 |              |           |              |              | 5800                        |        | 550                       |        |       |                     |
| 16/60-20     | 14 | 20           | 13(SDC)   | 410          | 1010         | 5150                        |        | 450                       |        |       |                     |
| 20.5/70-16   | 14 | 22           | 10.00G    | 335          | 910          | 1600                        |        | 280                       |        |       |                     |
| 16/70-16     |    |              |           |              |              | 1600                        |        | 280                       |        |       |                     |
| 20.5/70-16** | 14 | 17           | 10.00G    | 335          | 910          | 1600                        |        | 280                       |        |       |                     |
| 16/70-16**   |    |              |           |              |              | 1600                        |        | 280                       |        |       |                     |
| 14/90-16     | 10 | 16           | 7.0N      | 270          | 882          | 1530                        |        | 350                       |        |       |                     |
| 12.00-16     | 12 | 17           | 6.50H     | 255          | 890          | 1600                        |        | 420                       |        |       |                     |
| 8.25-16      | 8  | 16           | 6.5       | 235          | 865          | 1530                        |        | 300                       |        |       |                     |
| 7.50-16      | 8  | 16           | 5.5       | 215          | 815          | 750                         |        | 150                       |        |       |                     |

# H108AE

L-3/E-3 GENERAL BLOCK (ECOTYRE)

Specially designed for wheel loader and earthmover working in good road condition.  
It is economic type for users.



| Size    | PR | T.D.<br>(mm) | S.R.      | S.W.<br>(mm) | O.D.<br>(mm) | Max Loading (kg) |        | Pressure (kpa) |        | Type  | Code                 |
|---------|----|--------------|-----------|--------------|--------------|------------------|--------|----------------|--------|-------|----------------------|
|         |    |              |           |              |              | 50km/h           | 10km/h | 50km/h         | 10km/h |       |                      |
| 17.5-25 | 16 | 26.5         | 14.00/1.5 | 445          | 1350         | 4250             | 7300   | 300            | 475    | TT/TL | H108AE<br>L-3<br>E-3 |
|         | 20 |              |           |              |              | 5000             | 8250   | 400            | 575    |       |                      |
| 20.5-25 | 20 | 28           | 17.00/2.0 | 520          | 1490         | 6000             | 9500   | 325            | 450    |       |                      |
|         | 24 |              |           |              |              | 6700             | 10300  | 400            | 525    |       |                      |
| 23.5-25 | 20 | 30           | 19.50/2.5 | 595          | 1615         | 7300             | 10900  | 300            | 375    |       |                      |
|         | 24 |              |           |              |              | 8000             | 12500  | 350            | 475    |       |                      |

# H108B

L-3/E-3 LARGE BLOCK (S TREAD)

Optimized pattern design for mining and quarrying operations.  
Excellent abrasion.



| Size    | PR | T.D.<br>(mm) | S.R.      | S.W.<br>(mm) | O.D.<br>(mm) | Max Loading (kg) |        | Pressure (kpa) |        | Type  | Code                |
|---------|----|--------------|-----------|--------------|--------------|------------------|--------|----------------|--------|-------|---------------------|
|         |    |              |           |              |              | 50km/h           | 10km/h | 50km/h         | 10km/h |       |                     |
| 17.5-25 | 16 | 28           | 14.00/1.5 | 445          | 1350         | 4250             | 7300   | 300            | 475    | TT/TL | H108B<br>L-3<br>E-3 |
|         | 20 |              |           |              |              | 5000             | 8250   | 400            | 575    |       |                     |
| 23.5-25 | 20 | 33           | 19.50/2.5 | 595          | 1615         | 7300             | 10900  | 300            | 375    |       |                     |
|         | 24 |              |           |              |              | 8000             | 12500  | 350            | 475    |       |                     |
|         | 28 |              |           |              |              | 8750             | 13600  | 400            | 550    |       |                     |





# H108C

NEW L-3/E-3 LOADER MASTER(Z TREAD)

New Z tread tyre for low intensity application of Loader/Earthmover/Grader.



| Size       | PR | T.D.<br>(mm) | S.R.      | S.W.<br>(mm) | O.D.<br>(mm) | Max Loading (kg) |        | Pressure (kpa) |        | Type  | Code                |
|------------|----|--------------|-----------|--------------|--------------|------------------|--------|----------------|--------|-------|---------------------|
|            |    |              |           |              |              | 50km/h           | 10km/h | 50km/h         | 10km/h |       |                     |
| 16.00-25   | 28 | 28.5         | 11.25/2.0 | 430          | 1495         | 6700             | 11500  | 575            | 750    | TT/TL | H108C<br>L-3<br>E-3 |
|            | 32 |              |           |              |              | 7300             | 12500  | 650            | 875    |       |                     |
|            | 36 |              |           |              |              | 7750             | 13600  | 725            | 975    |       |                     |
|            | 40 |              |           |              |              | 8200             | 14500  | 800            | 1075   |       |                     |
| 18.00-25   | 32 | 31.5         | 13.00/2.5 | 500          | 1615         | 8750             | 15000  | 575            | 750    |       |                     |
|            | 36 |              |           |              |              | 9250             | 16000  | 625            | 850    |       |                     |
|            | 40 |              |           |              |              | 9750             | 17000  | 700            | 950    |       |                     |
|            | 44 |              |           |              |              | 10500            | 18000  | 775            | 1030   |       |                     |
| 15.5-25    | 12 | 24.5         | 12.00/1.3 | 395          | 1275         | 3250             | 5600   | 250            | 400    |       |                     |
|            | 16 |              |           |              |              | 3850             | 6750   | 325            | 525    |       |                     |
| 17.5-25    | 16 | 28           | 14.00/1.5 | 445          | 1350         | 4250             | 7300   | 300            | 475    |       |                     |
|            | 20 |              |           |              |              | 5000             | 8250   | 400            | 575    |       |                     |
| 20.5-25    | 20 | 30           | 17.00/2.0 | 520          | 1490         | 6000             | 9500   | 325            | 450    |       |                     |
|            | 24 |              |           |              |              | 6700             | 10300  | 400            | 525    |       |                     |
|            | 28 |              |           |              |              | 7500             | 11500  | 475            | 625    |       |                     |
| 23.5-25    | 20 | 33           | 19.50/2.5 | 595          | 1615         | 7300             | 10900  | 300            | 375    |       |                     |
|            | 24 |              |           |              |              | 8000             | 12500  | 350            | 475    |       |                     |
|            | 28 |              |           |              |              | 8750             | 13600  | 400            | 550    |       |                     |
| 26.5-25    | 28 | 35           | 22.00/3.0 | 675          | 1750         | 10000            | 15500  | 350            | 475    | TL    |                     |
|            | 32 |              |           |              |              | 11200            | 17000  | 425            | 550    |       |                     |
| 29.5-25    | 28 | 38           | 25.00/3.5 | 750          | 1875         | 11500            | 17500  | 325            | 425    |       |                     |
|            | 34 |              |           |              |              | 12500            | 19000  | 375            | 500    |       |                     |
| 20.5/70-16 | 14 | 22           | 10.00G    | 335          | 910          |                  | 1600   |                | 280    | TT    |                     |
| 16/70-16   |    |              |           |              |              |                  |        |                |        |       |                     |
| 20.5/70-16 | 14 | 14           | 10.00G    | 335          | 910          |                  | 1600   |                | 280    |       |                     |
| 16/70-16   |    |              |           |              |              |                  |        |                |        |       |                     |
| 20.5/70-16 | 14 | 14           | 10.00G    | 335          | 830          |                  | 1600   |                | 280    |       |                     |
| 16/70-16   |    |              |           |              |              |                  |        |                |        |       |                     |



# H108CE

NEW L-3/E-3 LOADER TYRE Z TREAD (ECOTYRE)

NEW Z tread tyre for wheel loader and earthmover working in good road condition.  
It is economic type for users.

| Size    | PR | T.D.<br>(mm) | S.R.      | S.W.<br>(mm) | O.D.<br>(mm) | Max Loading (kg) |        | Pressure (kpa) |        | Type  | Code                 |
|---------|----|--------------|-----------|--------------|--------------|------------------|--------|----------------|--------|-------|----------------------|
|         |    |              |           |              |              | 50km/h           | 10km/h | 50km/h         | 10km/h |       |                      |
| 17.5-25 | 16 | 27           | 14.00/1.5 | 445          | 1350         | 4250             | 7300   | 300            | 475    | TT/TL | H108CE<br>L-3<br>E-3 |
|         | 20 |              |           |              |              | 5000             | 8250   | 400            | 575    |       |                      |
| 20.5-25 | 20 | 28           | 17.00/2.0 | 520          | 1490         | 6000             | 9500   | 325            | 450    |       |                      |
|         | 24 |              |           |              |              | 6700             | 10300  | 400            | 525    |       |                      |
| 23.5-25 | 20 | 30           | 19.50/2.5 | 595          | 1615         | 7300             | 10900  | 300            | 375    |       |                      |
|         | 24 |              |           |              |              | 8000             | 12500  | 350            | 475    |       |                      |



# H108D

L-3/E-3 SNOW STAR SPECIAL (ANTI-SKIDDING)

Suitable for snow & ice and similar road condition where need good anti-skidding ability.

| Size    | PR | T.D.<br>(mm) | S.R.      | S.W.<br>(mm) | O.D.<br>(mm) | Max Loading (kg) |        | Pressure (kpa) |        | Type  | Code                |
|---------|----|--------------|-----------|--------------|--------------|------------------|--------|----------------|--------|-------|---------------------|
|         |    |              |           |              |              | 50km/h           | 10km/h | 50km/h         | 10km/h |       |                     |
| 17.5-25 | 16 | 28           | 14.00/1.5 | 445          | 1350         | 4250             | 7300   | 300            | 475    | TT/TL | H108D<br>L-3<br>E-3 |
|         | 20 |              |           |              |              | 5000             | 8250   | 400            | 575    |       |                     |



## H108E L-3/E-3 PREMIUM DESIGN OTR TYRE

Block non-directional pattern design,  
Excellent holding and traction performance  
With good controllability.



| Size      | PR | T.D.<br>(mm) | S.R.      | S.W.<br>(mm) | O.D.<br>(mm) | Max Loading (kg) |        | Pressure (kpa) |        | Type  | Code                |
|-----------|----|--------------|-----------|--------------|--------------|------------------|--------|----------------|--------|-------|---------------------|
|           |    |              |           |              |              | 50km/h           | 10km/h | 50km/h         | 10km/h |       |                     |
| ★ 17.5-25 | 16 | 30           | 14.00/1.5 | 445          | 1350         | 4250             | 7300   | 300            | 475    | TT/TL | H108E<br>L-3<br>E-3 |
|           | 20 |              |           |              |              | 5000             | 8250   | 400            | 575    |       |                     |
| ★ 20.5-25 | 20 | 33           | 17.00/2.0 | 520          | 1490         | 6000             | 9500   | 325            | 450    |       |                     |
|           | 24 |              |           |              |              | 6700             | 10300  | 400            | 525    |       |                     |
|           | 28 |              |           |              |              | 7500             | 11500  | 475            | 625    |       |                     |
| 23.5-25   | 20 | 35           | 19.50/2.5 | 595          | 1615         | 7300             | 10900  | 300            | 375    |       |                     |
|           | 24 |              |           |              |              | 8000             | 12500  | 350            | 475    |       |                     |
|           | 28 |              |           |              |              | 8750             | 13600  | 400            | 550    |       |                     |

## H108F L-3/E-3 PREMIUM DESIGN OTR TYRE

With excellent controllability,  
With excellent resistance to puncture, cutting and wear.



| Size      | PR | T.D.<br>(mm) | S.R.      | S.W.<br>(mm) | O.D.<br>(mm) | Max Loading (kg) |        | Pressure (kpa) |        | Type  | Code                |
|-----------|----|--------------|-----------|--------------|--------------|------------------|--------|----------------|--------|-------|---------------------|
|           |    |              |           |              |              | 50km/h           | 10km/h | 50km/h         | 10km/h |       |                     |
| ★ 17.5-25 | 16 | 30           | 14.00/1.5 | 445          | 1350         | 4250             | 7300   | 300            | 475    | TT/TL | H108F<br>L-3<br>E-3 |
|           | 20 |              |           |              |              | 5000             | 8250   | 400            | 575    |       |                     |
| ★ 20.5-25 | 20 | 33           | 17.00/2.0 | 520          | 1490         | 6000             | 9500   | 325            | 450    |       |                     |
|           | 24 |              |           |              |              | 6700             | 10300  | 400            | 525    |       |                     |
|           | 28 |              |           |              |              | 7500             | 11500  | 475            | 625    |       |                     |
| 23.5-25   | 20 | 35           | 19.50/2.5 | 595          | 1615         | 7300             | 10900  | 300            | 375    |       |                     |
|           | 24 |              |           |              |              | 8000             | 12500  | 350            | 475    |       |                     |
|           | 28 |              |           |              |              | 8750             | 13600  | 400            | 550    |       |                     |

## H109 IND-3S SUPER EXTRA SLICK

Suitable for loader and dozer.  
Special compound and smooth pattern design is suitable for heat and cut resistant.  
Smooth tread with a reinforced sidewall protector for hard working area .



| Size    | PR | T.D.<br>(mm) | S.R.      | S.W.<br>(mm) | O.D.<br>(mm) | Max Loading (kg)<br>@ 10km/h | Pressure (kpa)<br>@ 10km/h | Type  | Code           |
|---------|----|--------------|-----------|--------------|--------------|------------------------------|----------------------------|-------|----------------|
| 17.5-25 | 16 | 30           | 14.00/1.5 | 445          | 1350         | 7300                         | 475                        | TT/TL | H109<br>IND-3S |
|         | 20 |              |           |              |              | 8250                         | 575                        |       |                |
| 23.5-25 | 20 | 36           | 19.50/2.5 | 595          | 1615         | 10900                        | 375                        |       |                |
|         | 24 |              |           |              |              | 12500                        | 475                        |       |                |
|         | 28 |              |           |              |              | 13600                        | 550                        |       |                |

## H165 L-4 DEEP TREAD (MINING SERVICE)

Suitable for wheel loader with deep tread and cut resistant compound for rocky surface and mining service.  
Excellent traction and stability comfortable / Long life tread design



|   | Size    | PR | T.D.<br>(mm) | S.R.      | Size(mm) |      | Max Loading (kg)<br>@ 10km/h | Pressure (kpa)<br>@ 10km/h | Type  | Code        |
|---|---------|----|--------------|-----------|----------|------|------------------------------|----------------------------|-------|-------------|
|   |         |    |              |           | S.W.     | O.D. |                              |                            |       |             |
| ★ | 17.5-25 | 20 | 45.5         | 14.00/1.5 | 445      | 1400 | 8250                         | 575                        | TT/TL | H165<br>L-4 |
|   |         | 24 |              |           |          |      | 8950                         | 650                        |       |             |
| ★ | 20.5-25 | 24 | 51.5         | 17.00/2.0 | 520      | 1560 | 10300                        | 525                        |       |             |
|   |         | 28 |              |           |          |      | 11500                        | 625                        |       |             |
|   | 23.5-25 | 24 | 55           | 19.50/2.5 | 595      | 1675 | 12500                        | 475                        |       |             |
|   |         | 28 |              |           |          |      | 13600                        | 550                        |       |             |
|   |         | 32 |              |           |          |      | 14600                        | 625                        |       |             |
| ★ | 26.5-25 | 28 | 54           | 22.00/3.0 | 675      | 1800 | 15500                        | 450                        |       |             |
|   |         | 32 |              |           |          |      | 17000                        | 525                        |       |             |
| ★ | 29.5-25 | 28 | 57           | 25.00/3.5 | 750      | 1920 | 17500                        | 425                        |       |             |
|   |         | 34 |              |           |          |      | 20000                        | 525                        |       |             |



## H166

IND-3/E-3 OUTSTANDING QUALITY MINING & PORT EXTRA

Suitable for use in port and mining for long mileage.  
Specially designed pattern with extra strong tread and reinforced sidewall protector.



| Size     | PR | T.D.<br>(mm) | S.R.      | S.W.<br>(mm) | O.D.<br>(mm) | Max Loading (kg) |        | Pressure (kpa) |        | Type  | Code                 |
|----------|----|--------------|-----------|--------------|--------------|------------------|--------|----------------|--------|-------|----------------------|
|          |    |              |           |              |              | 50km/h           | 10km/h | 50km/h         | 10km/h |       |                      |
| 16.00-25 | 28 | 32           | 11.25/2.0 | 430          | 1550         | 6700             | 11500  | 575            | 750    | TT/TL | H166<br>IND-3<br>E-3 |
|          | 32 |              |           |              |              | 7300             | 12500  | 650            | 875    |       |                      |
|          | 36 |              |           |              |              | 7750             | 13600  | 725            | 975    |       |                      |
|          | 40 |              |           |              |              | 8200             | 14500  | 800            | 1075   |       |                      |
| 18.00-25 | 32 | 36           | 13.00/2.5 | 500          | 1675         | 8750             | 15000  | 575            | 750    |       |                      |
|          | 36 |              |           |              |              | 9250             | 16000  | 625            | 850    |       |                      |
|          | 40 |              |           |              |              | 9750             | 17000  | 700            | 950    |       |                      |
|          | 44 |              |           |              |              | 10300            | 18000  | 775            | 1050   |       |                      |

## H167

L-5 EXTRA DEEP TREAD (ROCK SERVICE)

Suitable for wheel loader with extra deep tread and cut resistant compound for rocky surface and mining service.  
Excellent traction and stability comfortable / Long life tread design.



| Size    | PR | T.D.<br>(mm) | S.R.      | Size(mm) |      | Max Loading (kg)<br>@10km/h | Pressure (kpa)<br>@10km/h | Type  | Code        |
|---------|----|--------------|-----------|----------|------|-----------------------------|---------------------------|-------|-------------|
|         |    |              |           | S.W.     | O.D. |                             |                           |       |             |
| 17.5-25 | 20 | 63.5         | 14.00/1.5 | 445      | 1400 | 8250                        | 575                       | TT/TL | H167<br>L-5 |
|         | 24 |              |           |          |      | 8950                        | 650                       |       |             |
| 20.5-25 | 24 | 71           | 17.00/2.0 | 520      | 1560 | 10300                       | 525                       |       |             |
|         | 28 |              |           |          |      | 11500                       | 625                       |       |             |
| 23.5-25 | 24 | 78.5         | 19.50/2.5 | 595      | 1675 | 12500                       | 475                       |       |             |
|         | 28 |              |           |          |      | 13600                       | 550                       |       |             |
|         | 32 |              |           |          |      | 14600                       | 625                       |       |             |
| 26.5-25 | 28 | 87.5         | 22.00/3.0 | 675      | 1800 | 15500                       | 450                       | TL    |             |
|         | 32 |              |           |          |      | 17000                       | 525                       |       |             |
| 29.5-25 | 28 | 95           | 25.00/3.5 | 750      | 1920 | 17500                       | 425                       |       |             |
|         | 34 |              |           |          |      | 20000                       | 525                       |       |             |

## H168 / H168ww

G-2/L-2 SUPER GRADER LOADER SPECIAL

Suitable for wheel loader with extra deep tread and cut resistant compound for rocky surface and mining service.  
Excellent traction and stability comfortable / Long life tread design.



H168

H168ww

| Size     | PR | T.D.<br>(mm) | S.R.      | S.W.<br>(mm) | O.D.<br>(mm) | Max Loading (kg)<br>@ 40km/h | Pressure (kpa)<br>@ 40km/h | Type  | Code                         |
|----------|----|--------------|-----------|--------------|--------------|------------------------------|----------------------------|-------|------------------------------|
| 13.00-24 | 12 | 24           | 8.00TG    | 335          | 1280         | 2725                         | 300                        | TT/TL | H168<br>H168WW<br>G-2<br>L-2 |
|          | 16 |              |           |              |              | 3200                         | 400                        |       |                              |
| 14.00-24 | 12 | 25           | 8.00TG    | 360          | 1350         | 3450                         | 325                        | TT/TL | H168<br>H168ECO<br>G-2 L-2   |
|          | 16 |              |           |              |              | 3650                         | 375                        |       |                              |
| 17.5-25  | 16 | 26           | 14.00/1.5 | 445          | 1350         | 3350                         | 275                        | TT/TL | H168<br>H168ECO<br>G-2 L-2   |
|          | 20 |              |           |              |              | 3650                         | 325                        |       |                              |
| 20.5-25  | 16 | 28.5         | 17.00/2.0 | 575          | 1490         | 4000                         | 225                        | TT/TL | H168<br>G-2 L-2              |
|          | 20 |              |           |              |              | 4500                         | 275                        |       |                              |
| 23.5-25  | 16 | 28.5         | 19.50/2.5 | 595          | 1615         | 4750                         | 200                        | TT/TL | H168<br>G-2 L-2              |
|          | 20 |              |           |              |              | 5450                         | 250                        |       |                              |

## H169

E-7 HEATMASTER SAND/DESERT TIRE

The combination of wide tread, round shoulder and streamlined pattern design provides stable ride, good floating force, excellent steering ability on sand ground road surface.  
With HEATMASTER compound for desert application.



| Size     | PR | T.D.<br>(mm) | S.R.      | S.W.<br>(mm) | O.D.<br>(mm) | Max Loading (kg) | Pressure (kpa) | Type  | Code        |
|----------|----|--------------|-----------|--------------|--------------|------------------|----------------|-------|-------------|
| 9.00-16  | 8  | 10           | 6.50H     | 860          | 245          | 1320             | 310            | TT/TL | H169<br>E-7 |
| 9.00-17  | 8  | 10           | 7J        | 880          | 245          | 1320             | 310            | TT/TL |             |
| 14.00-20 | 18 | 10           | 10.00W    | 1207         | 355          | 4125             | 245            | TT/TL |             |
| 16.00-20 | 16 | 14           | 10.00W    | 1323         | 419          | 5450             | 245            |       |             |
| 21.00-25 | 16 | 14           | 15.00/3.0 | 1699         | 599          | 10000            | 245            |       |             |
| 29.5-25  | 28 | 21           | 25.00/3.5 | 1820         | 687          | 10000            | 240            | TL    |             |



## H176 E-2 HEAVY COUNTRY CROSS TIRE (SUPER MILITARY APP.)

Super country-cross pattern is suitable for heavy trucks and other machines.  
Military tech design can support using in terriable conditions such as desert, grass, forest, mountain road etc.



| Size         | PR | T.D. (mm) | S.R.    | S.W. (mm) | O.D. (mm) | Loading (kg) @ 60km/h | Pressure (kpa) @ 60km/h | Type | Code     |
|--------------|----|-----------|---------|-----------|-----------|-----------------------|-------------------------|------|----------|
| 1500X600-635 | 14 | 29        | 500X635 | 600       | 1500      | 5750                  | 380                     | TT   | H176 E-2 |
|              | 18 |           |         |           |           | 6500                  | 470                     |      |          |
|              | 22 |           |         |           |           | 7050                  | 550                     |      |          |
| 1600X600-685 | 24 | 29        | 500X685 | 600       | 1600      | 7900                  | 440                     |      |          |

## H178 R-3/C-2/E-7 MULTI-PURPOSE FLOATION TIRE

Wide Section for good flotation force and steering ability.  
Special for desert transportation and road compactor application.



| Size    | PR | S.R. | S.W. (mm) | O.D. (mm) | Loading (kg) @ 10km/h | Pressure (kpa) @ 10km/h | Type  | Code             |
|---------|----|------|-----------|-----------|-----------------------|-------------------------|-------|------------------|
| 23.1-26 | 12 | DW20 | 595       | 1500      | 5150                  | 200                     | TT/TL | H178 R-3 C-2 E-7 |
|         | 14 |      |           |           | 5600                  | 230                     |       |                  |
|         | 16 |      |           |           | 6150                  | 260                     |       |                  |

## H179 IND-4/E-4 PORT & MINING SPECIAL

Deep tread depth for longer lifespan  
Wide tread design with wearing resistance.  
Thick tyre body with power torque quality.



| Size       | PR | T.D. (mm) | S.R.      | S.W. (mm) | O.D. (mm) | Max Loading (kg) |        | Pressure (kpa) |        | Type | Code           |
|------------|----|-----------|-----------|-----------|-----------|------------------|--------|----------------|--------|------|----------------|
|            |    |           |           |           |           | 50km/h           | 10km/h | 50km/h         | 10km/h |      |                |
| ★ 18.00-25 | 32 | 64.5      | 13.00/2.5 | 515       | 1694      | 8750             | 15000  | 575            | 750    | TL   | H179 IND-4 E-4 |
|            | 36 |           |           |           |           | 9250             | 16000  | 625            | 850    |      |                |
|            | 40 |           |           |           |           | 9750             | 17000  | 700            | 950    |      |                |
|            | 44 |           |           |           |           | 10300            | 18000  | 775            | 1050   |      |                |

## H180 IND-4S/L-4S PORT & MINING SPECIAL

Deep tread depth for longer lifespan  
Wide tread design with wearing resistance.  
Thick tyre body with power torque quality.



| Size       | PR | T.D. (mm) | S.R.      | S.W. (mm) | O.D. (mm) | Max Loading (kg) |        | Pressure (kpa) |        | Type | Code             |
|------------|----|-----------|-----------|-----------|-----------|------------------|--------|----------------|--------|------|------------------|
|            |    |           |           |           |           | 50km/h           | 10km/h | 50km/h         | 10km/h |      |                  |
| ★ 18.00-25 | 32 | 58        | 13.00/2.5 | 500       | 1675      | 8750             | 15000  | 575            | 750    | TL   | H180 IND-4S L-4S |
|            | 36 |           |           |           |           | 9250             | 16000  | 625            | 850    |      |                  |
|            | 40 |           |           |           |           | 9750             | 17000  | 700            | 950    |      |                  |
|            | 44 |           |           |           |           | 10300            | 18000  | 775            | 1050   |      |                  |





# FORKLIFT TYRE



*Tire Direct*   
La nueva generación



# H989 INDUSTRIAL MASTER (IND)

Developed for heavy use on forklifts and other industrial vehicles. With its wide and extra deep tread provides stronger traction, longer life and puncture resistance.



| Size                                | PR | T.D.<br>(mm) | S.R.  | O.D.<br>(mm) | S.W.<br>(mm) | Max Loading(kg) | Pressure<br>(kpa) | Code        |
|-------------------------------------|----|--------------|-------|--------------|--------------|-----------------|-------------------|-------------|
|                                     |    |              |       |              |              | 25km/h<br>Load  |                   |             |
| 300-15                              | 18 | 21           | 8.0   | 848          | 300          | 5530            | 830               | H989<br>IND |
|                                     | 20 |              |       |              |              | 5940            | 930               |             |
| 12.00-20                            | 18 | 29           | 8.5   | 1135         | 315          | 6335            | 790               |             |
|                                     | 20 |              |       |              |              | 7400            | 900               |             |
| 10.00-20                            | 16 | 28           | 7.5   | 1078         | 278          | 6030            | 790               |             |
|                                     | 18 |              |       |              |              | 6475            | 890               |             |
| 9.00-20                             | 14 | 26           | 7.0   | 1025         | 259          | 5195            | 760               |             |
|                                     | 16 |              |       |              |              | 5595            | 860               |             |
| 8.25-15                             | 14 | 18           | 6.5   | 840          | 235          | 3775            | 830               |             |
|                                     | 16 |              |       |              |              | 4050            | 925               |             |
| 28X9-15<br>(8.15-15)<br>(225/70-15) | 14 | 19           | 7.0   | 710          | 220          | 3050            | 970               |             |
|                                     | 16 |              |       |              |              | 3115            | 1000              |             |
| 7.50-15                             | 14 | 21           | 6.0   | 780          | 215          | 3375            | 925               |             |
|                                     | 16 |              |       |              |              | 3550            | 1000              |             |
| 7.00-15                             | 12 | 21           | 5.5   | 750          | 200          | 2870            | 860               |             |
|                                     | 14 |              |       |              |              | 3140            | 1000              |             |
| 8.25-12                             | 12 | 18           | 6.5   | 765          | 235          | 3060            | 720               |             |
|                                     | 14 |              |       |              |              | 2375            | 860               |             |
| 7.00-12                             | 12 | 13           | 5.00S | 676          | 190          | 2590            | 1000              |             |
|                                     | 14 |              |       |              |              | 1655            | 790               |             |
| 6.50-10                             | 10 | 12           | 5.00F | 590          | 175          | 1895            | 1000              |             |
|                                     | 12 |              |       |              |              | 1995            | 860               |             |
| 7.00-9                              | 10 | 13           | 5.00S | 590          | 190          | 1502            | 860               |             |
|                                     | 12 |              |       |              |              | 1675            | 1030              |             |
| 6.00-9                              | 10 | 11           | 4.00F | 540          | 160          | 1150            | 1000              |             |
|                                     | 12 |              |       |              |              | 1085            | 860               |             |
| 5.00-8                              | 10 | 11           | 3.50D | 470          | 137          | 1310            | 760               |             |
|                                     | 12 |              |       |              |              | 1505            | 970               |             |
| 16X6-8                              | 10 | 13           | 4.33R | 425          | 152          | 1695            | 1000              |             |
|                                     | 12 |              |       |              |              | 1545            | 620               |             |
| 18X7-8<br>(180/70-8)                | 14 | 15           | 4.33R | 465          | 173          | 2040            | 1000              |             |
|                                     | 16 |              |       |              |              | 2345            | 760               |             |
| 21X8-9<br>(200/75-9)                | 10 | 15           | 6.00E | 535          | 200          | 2585            | 900               |             |
|                                     | 14 |              |       |              |              | 2810            | 1030              |             |
| 23X9-10                             | 12 | 16           | 6.50F | 595          | 225          | 3285            | 860               |             |
|                                     | 14 |              |       |              |              | 3585            | 1000              |             |
| 27X10-12                            | 14 | 16           | 8.00G | 690          | 255          |                 |                   |             |
|                                     | 16 |              |       |              |              |                 |                   |             |

# TW898 EXTRA POWER STRONG INDUSTRIAL

Pattern design with wide contact area increases traction. Reinforced tie bar between the zig-zag pattern. New compound for outstanding durability / longer life.



| Size    | PR | T.D.<br>(mm) | S.R.  | O.D.<br>(mm) | S.W.<br>(mm) | Loading<br>(kg) | Pressure<br>(kpa) | Type | Code         |
|---------|----|--------------|-------|--------------|--------------|-----------------|-------------------|------|--------------|
| 8.25-15 | 16 | 25           | 6.5   | 845          | 242          | 4050            | 925               | TT   | TW898<br>IND |
| 7.50-16 | 16 | 22           | 6.00S | 810          | 212          | 3870            | 880               |      |              |

# H990 XTRA WALL AND MASSIVE TREAD BLOCK

New pattern design supports longer working life. Special compound could be used in much more hard working sites. Non-symmetric tread offers more traction power and better wear-ability.



| Size    | PR | T.D.<br>(mm) | S.R.  | O.D.<br>(mm) | S.W.<br>(mm) | Loading<br>(kg) | Pressure<br>(kpa) | Type | Code        |
|---------|----|--------------|-------|--------------|--------------|-----------------|-------------------|------|-------------|
| 8.25-15 | 16 | 22           | 6.5   | 840          | 242          | 4050            | 925               | TT   | H990<br>IND |
| 28X9-15 | 14 | 22           | 7.0   | 713          | 220          | 3050            | 970               |      |             |
|         | 16 |              |       |              |              | 3115            | 1000              |      |             |
| 7.00-12 | 14 | 20           | 5.00S | 676          | 192          | 2590            | 1000              |      |             |
| 6.50-10 | 12 | 21           | 5.00F | 590          | 185          | 1895            | 1000              |      |             |
| 7.00-9  | 10 | 19           | 5.00S | 590          | 192          | 1895            | 860               |      |             |
| 6.00-9  | 12 | 18           | 4.00F | 540          | 168          | 1675            | 1030              |      |             |
| 5.00-8  | 10 | 16           | 3.50D | 470          | 138          | 1150            | 1000              |      |             |
| 18X7-8  | 14 | 18           | 4.33R | 465          | 173          | 1505            | 970               |      |             |
|         | 16 |              |       |              |              | 1695            | 1000              |      |             |

# DT1000 SUPER DEEP TREAD & WIDE CROWN SERIES

Developed for heavy use on forklifts and other industrial vehicles. With its wide and extra deep tread provides stronger traction, longer life and puncture resistance.



| Size    | PR | T.D.<br>(mm) | S.R.  | O.D.<br>(mm) | S.W.<br>(mm) | Loading<br>(kg) | Pressure<br>(kpa) | Type | Code           |
|---------|----|--------------|-------|--------------|--------------|-----------------|-------------------|------|----------------|
| 8.25-20 | 18 | 35           | 6.5   | 235          | 975          | 5300            | 950               | TT   | DT1000<br>IND  |
| 8.25-15 | 16 | 33.5         | 6.5   | 246          | 851          | 4050            | 925               |      |                |
| 28X9-15 | 16 | 28           | 7.0   | 224          | 713          | 3115            | 1000              |      |                |
| 7.00-12 | 14 | 33.5         | 5.00S | 200          | 680          | 2590            | 1000              |      |                |
| 6.50-10 | 12 | 31           | 5.00F | 185          | 599          | 1865            | 1000              |      |                |
| 6.00-9  | 12 | 26           | 4.00F | 168          | 555          | 1675            | 1030              |      |                |
| 5.00-8  | 10 | 23           | 3.50D | 142          | 470          | 1150            | 1000              |      |                |
| 28X9-15 | 16 | 28           | 7.0   | 224          | 713          | 3115            | 1000              | TT   | DT1000+<br>IND |
|         | 24 |              |       |              |              | 5670            | 1200              |      |                |





## SPECIALITY IND TYRE



*Tire Direct*   
La nueva generación



# AS2000 L-2 URBAN INDUSTRIAL

Developed for urban excavator and industrial trailer vehicles, by new compound for outstanding durability. Extra deep tread provides longer life and puncture resistance. Reinforced tie bar between the zig-zag block pattern.



| Size    | PR | T.D. (mm) | S.R. | O.D. (mm) | S.W. (mm) | Loading (kg) | Pressure (kpa) | Type | Code           |
|---------|----|-----------|------|-----------|-----------|--------------|----------------|------|----------------|
| 9.00-20 | 16 | 28        | 7.0  | 1025      | 260       | 4060         | 740            | TT   | AS2000 L-2 NHS |

# H966 G-2/L-2 EXCAVATOR TYRE(X'C)

Optimized pattern design for excavator. Excellent abrasion and traction and self-cleaning.



H966A H966B

| Size     | PR | T.D. (mm) | S.R. | S.W. (mm) | O.D. (mm) | Loading (kg) @ 10km/h | Pressure (kpa) @ 10km/h | Type | Code      |
|----------|----|-----------|------|-----------|-----------|-----------------------|-------------------------|------|-----------|
| 8.25-20  | 14 | 20        | 6.5  | 235       | 992       | 3865                  | 830                     | TT   | H966A     |
| 9.00-20  | 16 | 22        | 7.0  | 259       | 1038      | 4725                  | 860                     |      | G-2/L-2   |
| 10.00-20 | 18 | 22        | 7.5  | 278       | 1073      | 5470                  | 890                     | TT   | H966A     |
| 11.00-20 | 16 | 24        | 8.0  | 293       | 1105      | 5405                  | 760                     |      | G-2/L-2   |
|          | 18 |           |      |           |           | 6000                  | 825                     |      |           |
| 9.00-20  | 16 | 25        | 7.0  | 259       | 1040      | 4725                  | 860                     | TT   | H966B G-2 |

# H967 G-2/L-2 EXCAVATOR TYRE (ECO-USE)



| Size     | PR | T.D. (mm) | S.R. | S.W. (mm) | O.D. (mm) | Loading (kg) @ 10km/h | Pressure (kpa) @ 10km/h | Type | Code    |
|----------|----|-----------|------|-----------|-----------|-----------------------|-------------------------|------|---------|
| 9.00-20  | 16 | 20        | 7.0  | 259       | 1038      | 4725                  | 860                     | TT   | H967    |
| 10.00-20 | 18 | 20        | 7.5  | 278       | 1073      | 5470                  | 890                     |      | G-2/L-2 |



SKS-1 (R-4) SKS-1+ (R-4) TW171 (L-2) SKS-2 (NEW L-2)

# SKS-1/1+/TW171/2 SKID STEER TYRE/INDUSTRIAL TYRE

| Size      | PR | T.D. (mm) | S.R.  | S.W. (mm) | O.D. (mm) | Loading (kg) | Pressure (kpa) | Type | Code          |
|-----------|----|-----------|-------|-----------|-----------|--------------|----------------|------|---------------|
| 27X8.5-15 | 8  | 13        | 7JA   | 215       | 678       | 1030         | 350            | TL   | SKS-1 R-4     |
| 11L-16    | 12 | 15        | 8LB   | 280       | 835       | 1395         | 420            |      |               |
| 10-16.5   | 8  | 19        | 8.25  | 773       | 264       | 1880         | 410            |      |               |
|           | 10 |           |       |           |           | 2135         | 520            |      |               |
|           | 12 |           |       |           |           | 2375         | 620            |      |               |
| 12-16.5   | 12 | 19        | 9.75  | 831       | 307       | 2865         | 550            |      |               |
|           | 14 |           |       |           |           | 3075         | 620            |      |               |
| 14-17.5   | 14 | 19        | 10.5  | 921       | 349       | 3875         | 550            |      |               |
| 15-19.5   | 14 | 21        | 11.75 | 1019      | 389       | 4565         | 485            |      |               |
|           | 16 |           |       |           |           | 4935         | 550            |      |               |
| 12-16.5   | 14 | 22        | 9.75  | 307       | 831       | 3075         | 620            | TL   | SKS-1+ R-4    |
| 12-16.5   | 14 | 21        | 9.75  | 310       | 835       | 3075         | 620            | TL   | TW171 L-2     |
| 12-16.5   | 14 | 25        | 9.75  | 314       | 840       | 3075         | 620            | TL   | SKS-2 NEW L-2 |

## SKS-1 R-4 STANDARD

Optimized pattern design for loader/grader with excellent traction and self-cleaning in a muddy ground.

## SKS-1+ R-4 ADVANCED

Optimized pattern design for loader/grader with excellent traction and self-cleaning in a muddy ground.

## TW171 L-2 ADVANCED

Optimized pattern design for loader/grader with excellent traction and self-cleaning in a muddy ground.

## SKS-2 NEW L-2 PRIMIUM

For loaders and dozers operations on rock, coal and earth. Separate lugs and tapered for greater traction and self-cleaning. Extra wide tread profile for better land ratio and High floating force.





SKS-3 (L-5)



SKS-4 (R-4+)



SKS-5 (L-4)

## SKS-3/4/5

SKID STEER TYRE/INDUSTRIAL TYRE

| Size       | PR | T.D.<br>(mm) | S.R. | S.W.<br>(mm) | O.D.<br>(mm) | Loading<br>(kg) | Pressure<br>(kpa) | Type | Code       |
|------------|----|--------------|------|--------------|--------------|-----------------|-------------------|------|------------|
| 10-16.5    | 12 | 35           | 8.25 | 270          | 785          | 2865            | 550               | TL   | SKS-3 L-5  |
| 12-16.5    | 14 | 42           | 9.75 | 314          | 845          | 3075            | 620               |      |            |
| 12.5/80-18 | 16 | 34           | 9    | 308          | 985          | 3130            | 490               |      |            |
| 19.5L-24   | 16 | 38           | DW16 | 495          | 1339         | 4625            | 300               | TL   | SKS-4 R-4+ |
| 10-16.5    | 12 | 27           | 8.25 | 270          | 785          | 2865            | 550               |      |            |
| 12-16.5    | 14 | 35           | 9.75 | 314          | 845          | 3075            | 620               |      |            |
| 12.5/80-18 | 16 | 30           | 9    | 308          | 985          | 3130            | 490               | TL   | SKS-5 L-4  |
| 10-16.5    | 12 | 27           | 8.25 | 270          | 785          | 2865            | 550               |      |            |
| 12-16.5    | 14 | 35           | 9.75 | 314          | 845          | 3075            | 620               |      |            |

### SKS-3 L-5 EXTRA DEEP

Application to Skid Steer loader and scraper tyre for hard working area.  
Good wear resistance, with extra deep tread and side-skidding resistance.

### SKS-4 R-4+ ALL TERRAIN

For loaders and dozers operations on rock, coal and earth.  
Extra wide tread profile for better land ratio and High floating force.

### SKS-5 L-4 DEEP

Application to Skid Steer loader and scraper tyre for hard working area.  
Good wear resistance, with extra deep tread and side-skidding resistance



SKS-X



SKS-Y



SKS-Z

## SKS-X/Y/Z

SKID STEER TYRE

| Size       | PR | T.D.<br>(mm) | S.R. | S.W.<br>(mm) | O.D.<br>(mm) | Max Loading<br>(kg) | Pressure<br>(kpa) | Type | Code            |
|------------|----|--------------|------|--------------|--------------|---------------------|-------------------|------|-----------------|
| 33X12-16.5 | 10 | 14           | 9.75 | 310          | 840          | 2540                | 450               | TL   | SKS-X Off Road  |
| 33X12-16.5 | 10 | 14           | 9.75 | 310          | 840          | 2540                | 450               |      | SKS-Y Sandtrack |
| 33X12-16.5 | 10 | 14           | 9.75 | 310          | 840          | 2540                | 450               |      | SKS-Z Turf      |

## H656

R-4+ A/T INDUSTRIAL TYRE

All terrain tread design for better performance in machine working.  
Resistance to cuts, abrasions and high load capacity.



| Size    | PR | T.D.<br>(mm) | S.R. | S.W.<br>(mm) | O.D.<br>(mm) | Loading (kg)<br>@ 30km/h | Pressure (kpa)<br>@ 30km/h | Type | Code      |
|---------|----|--------------|------|--------------|--------------|--------------------------|----------------------------|------|-----------|
| 16.9-24 | 14 | 26           | W15L | 430          | 1323         | 3530                     | 300                        | TL   | H656 R-4+ |
| 16.9-28 | 14 | 26           | W15L | 430          | 1423         | 3765                     | 300                        |      |           |



# H658 R-4 INDUSTRIAL TYRE

Very good traction and better tire life.  
Good resistance to tearing and cracking.  
Resistance to cuts, abrasions and high load capacity.



| Size     | PR | T.D.<br>(mm) | S.R. | S.W.<br>(mm) | O.D.<br>(mm) | Loading (kg)<br>@ 30km/h | Pressure (kpa)<br>@ 30km/h | Type | Code        |
|----------|----|--------------|------|--------------|--------------|--------------------------|----------------------------|------|-------------|
| 16.9-24  | 10 | 27           | W15L | 430          | 1323         | 2230                     | 200                        | TL   | H658<br>R-4 |
|          | 12 |              |      |              |              | 2440                     | 240                        |      |             |
| 16.9-28  | 10 | 27           | W15L | 430          | 1423         | 2380                     | 200                        |      |             |
|          | 12 |              |      |              |              | 2605                     | 240                        |      |             |
| 18.4-26  | 10 | 27           | W16L | 467          | 1438         | 2645                     | 180                        |      |             |
|          | 12 |              |      |              |              | 2985                     | 230                        |      |             |
| 17.5L-24 | 10 | 26           | W15L | 445          | 1253         | 1725                     | 190                        |      |             |
|          | 12 |              |      |              |              | 1925                     | 250                        |      |             |
| 19.5L-24 | 10 | 27           | DW16 | 495          | 1328         | 1925                     | 170                        |      |             |
|          | 12 |              |      |              |              | 2145                     | 210                        |      |             |
| 21L-24   | 10 | 29           | DW18 | 533          | 1388         | 2090                     | 150                        |      |             |
|          | 12 |              |      |              |              | 2410                     | 190                        |      |             |
|          | 16 |              |      |              |              | 2795                     | 250                        |      |             |

# H659 R-4 TRACTION IMPLEMENT/BACKHOE

Excellent traction and flushing / Good resistance to cracking.  
Strengthen and stabilize tread under severe operating condition.



| Size       | PR | T.D.<br>(mm) | S.R. | S.W.<br>(mm) | O.D.<br>(mm) | Loading (kg)<br>@ 30km/h | Pressure (kpa)<br>@ 30km/h | Type | Code        |
|------------|----|--------------|------|--------------|--------------|--------------------------|----------------------------|------|-------------|
| 10.5/80-18 | 10 | 22           | 9    | 274          | 905          | 1935                     | 370                        | TL   | H659<br>R-4 |
|            | 12 |              |      |              |              | 2150                     | 430                        |      |             |
| 12.5/80-18 | 12 | 26           | 9    | 308          | 985          | 2625                     | 370                        |      |             |
|            | 14 |              |      |              |              | 2910                     | 430                        |      |             |
|            | 16 |              |      |              |              | 3130                     | 490                        |      |             |

# H660 R-4 INDUSTRIAL TYRE

Very good traction and better tire life.  
Good resistance to tearing and cracking.  
Resistance to cuts, abrasions and high load capacity.



| Size     | PR | T.D.<br>(mm) | S.R. | S.W.<br>(mm) | O.D.<br>(mm) | Loading (kg)<br>@ 30km/h | Pressure (kpa)<br>@ 30km/h | Type | Code        |
|----------|----|--------------|------|--------------|--------------|--------------------------|----------------------------|------|-------------|
| 19.5L-24 | 10 | 27           | DW16 | 495          | 1328         | 1925                     | 170                        | TL   | H660<br>R-4 |
|          | 12 |              |      |              |              | 2145                     | 210                        |      |             |

# H661 F-3 INDUSTRIAL FRONT

Husky industrial rib design, wide profile for front backhoe loader service.



| Size   | PR | T.D.<br>(mm) | S.R. | S.W.<br>(mm) | O.D.<br>(mm) | Loading (kg)<br>@ 30km/h | Pressure (kpa)<br>@ 30km/h | Type | Code        |
|--------|----|--------------|------|--------------|--------------|--------------------------|----------------------------|------|-------------|
| 11L-15 | 10 | 12           | 8LB  | 280          | 810          | 1190                     | 340                        | TL   | H661<br>F-3 |
|        | 12 |              |      |              |              | 1355                     | 420                        |      |             |
| 11L-16 | 10 | 12           | 8LB  | 280          | 835          | 1240                     | 340                        |      |             |
|        | 12 |              |      |              |              | 1395                     | 420                        |      |             |



## H663 I-1 FARM SPECIALIST IMPLEMENT

Multi rib farm tire designed for flotation for use on farm implement, wagons, tanks, carts and other pull behind vehicles.



| Size     | PR | T.D.<br>(mm) | S.R. | S.W.<br>(mm) | O.D.<br>(mm) | Loading (kg)<br>@30km/h | Pressure (kpa)<br>@30km/h | Type | Code        |
|----------|----|--------------|------|--------------|--------------|-------------------------|---------------------------|------|-------------|
| 9.5L-15  | 8  | 8            | 8LB  | 240          | 765          | 1100                    | 280                       | TL   | H663<br>I-1 |
|          | 10 |              |      |              |              | 1310                    | 340                       |      |             |
| 11L-15   | 8  | 9            | W8L  | 280          | 775          | 1130                    | 220                       |      |             |
|          | 10 |              |      |              |              | 1285                    | 280                       |      |             |
|          | 12 |              |      |              |              | 1345                    | 340                       |      |             |
| 12.5L-15 | 8  | 9            | W10L | 317          | 823          | 1350                    | 220                       |      |             |
|          | 12 |              |      |              |              | 1730                    | 330                       |      |             |
|          | 14 |              |      |              |              | 1830                    | 360                       |      |             |
| 11L-16   | 8  | 9            | W8L  | 280          | 800          | 1175                    | 220                       |      |             |
|          | 10 |              |      |              |              | 1340                    | 280                       |      |             |
|          | 12 |              |      |              |              | 1515                    | 340                       |      |             |

## H664 R-1 TRACTION STAR ( IND & AG )

Best for tractor, telehandler, backhoe loader, compactor. Excellent traction, self-cleaning and cutting resistance



| Size                      | PR | T.D.<br>(mm) | S.R. | S.W.<br>(mm) | O.D.<br>(mm) | Max Loading<br>(kg) | Pressure<br>(kpa) | Type | Code        |
|---------------------------|----|--------------|------|--------------|--------------|---------------------|-------------------|------|-------------|
| 15.5/80-24<br>(400/80-24) | 12 | 35           | 13.0 | 394          | 1262         | 2900                | 300               | TL   | H664<br>R-1 |
|                           | 16 |              |      |              |              | 3350                | 400               |      |             |

## H665 DEEP R-4 TRACTION STAR

Best for tractor, telehandler, backhoe loader, compactor. Excellent traction, self-cleaning and cutting resistance



| Size                    | PR | T.D.<br>(mm) | S.R. | S.W.<br>(mm) | O.D.<br>(mm) | Max Loading<br>(kg) | Pressure<br>(kpa) | Type | Code         |
|-------------------------|----|--------------|------|--------------|--------------|---------------------|-------------------|------|--------------|
| 405/70-20<br>(16/70-20) | 14 | 37           | 13.0 | 407          | 1076         | 3250                | 350               | TL   | H665<br>DR-4 |
| 405/70-24<br>(16/70-24) | 14 | 37           | 13.0 | 407          | 1178         | 3550                | 350               |      |              |

## H666 R-4 BOOM LIFT TYRE

Good performance for boom lift and other air-work machines. Stable support with excellent wear resistant.



| Size         | PR | T.D.<br>(mm) | S.R.  | S.W.<br>(mm) | O.D.<br>(mm) | Max Loading<br>(kg) | Pressure<br>(kpa) | Type | Code        |
|--------------|----|--------------|-------|--------------|--------------|---------------------|-------------------|------|-------------|
| ★ 315/55D20  | 12 | 18           | 11.00 | 319          | 830          | 3360                | 560               | TL   | H666<br>R-4 |
| ★ 355/55D625 | 14 | 23           | 11.75 | 360          | 936          | 3450                | 520               |      |             |
| ★ 15-625     | 16 | 25           | 13.00 | 385          | 1018         | 5580                | 690               |      |             |
| ★ 18-625     | 16 | 25           | 15.00 | 455          | 1046         | 6900                | 690               |      |             |
| ★ 445/50D710 | 18 | 25           | W15   | 445          | 1189         | 7300                | 690               |      |             |
|              | 20 |              |       |              |              | 7740                | 790               |      |             |





**SUPER SOLID  
TYRE**



*Tire Direct*   
La nueva generación



# H991A

XTRA WALL AND MASSIVE TREAD BLOCK SOLID

High quality raw material support and unique formula design.



| Size                  | T.D.<br>(mm) | S.R. | O.D.<br>(mm) | S.W.<br>(mm) | Max Loading(kg) |      |        |      |                  | Code           |
|-----------------------|--------------|------|--------------|--------------|-----------------|------|--------|------|------------------|----------------|
|                       |              |      |              |              | Forklift        |      |        |      | Other Industrial |                |
|                       |              |      |              |              | 10km/h          |      | 16km/h |      | 10km/h           |                |
|                       |              |      |              |              | Load            | Rota | Load   | Rota |                  |                |
| 300-15<br>(315/70-15) | 29           | 8.0  | 838          | 300          | 6895            | 5305 | 6300   | 4845 | 5310             | H991A<br>SOLID |

# H991B

EXCELLENT VIBRATION CONTROL PATTERN SOLID

Agressive pattern for port trailer and forklift.  
High load & excellent wear-resistance.



| Size     | T.D.<br>(mm) | S.R. | O.D.<br>(mm) | S.W.<br>(mm) | Max Loading(kg) |      |        |      |                  | Code           |
|----------|--------------|------|--------------|--------------|-----------------|------|--------|------|------------------|----------------|
|          |              |      |              |              | Forklift        |      |        |      | Other Industrial |                |
|          |              |      |              |              | 10km/h          |      | 16km/h |      | 10km/h           |                |
|          |              |      |              |              | Load            | Rota | Load   | Rota |                  |                |
| 9.00-20  | 40           | 6.5  | 1038         | 259          | 6160            | 5153 | 5630   | 4690 | 4745             | H991B<br>SOLID |
| 9.00-20  |              | 7.0  | 1038         | 259          | 6365            | 5305 | 5815   | 4845 | 4905             |                |
| 10.00-20 | 40           | 7.5  | 1073         | 278          | 7075            | 5895 | 6460   | 5385 | 5450             |                |
| 10.00-20 |              | 8.0  | 1073         | 278          | 7300            | 6085 | 6670   | 5560 | 5630             |                |
| 11.00-20 | 45           | 7.5  | 1095         | 300          | 7470            | 6225 | 6820   | 5685 | 5750             |                |
| 11.00-20 |              | 8.0  | 1095         | 300          | 7715            | 6430 | 7045   | 5870 | 5940             |                |
| 12.00-20 | 45           | 8.0  | 1180         | 310          | 8640            | 7200 | 7885   | 6570 | 6650             |                |
| 12.00-20 |              | 8.5  | 1180         | 310          | 8920            | 7435 | 8140   | 6785 | 6865             |                |

# H992A

SUPER STRONG LARGE BLOCK SOLID

Litter rolling resistance & low heat generating.  
Little energy conservation & strong rockfall resistance.  
It's the best choice for balanced forklift and other industrial vehicles.



| Size                                | T.D.<br>(mm) | S.R. | O.D.<br>(mm) | S.W.<br>(mm) | Max Loading(kg) |      |        |      |                  | Code           |
|-------------------------------------|--------------|------|--------------|--------------|-----------------|------|--------|------|------------------|----------------|
|                                     |              |      |              |              | Forklift        |      |        |      | Other Industrial |                |
|                                     |              |      |              |              | 10km/h          |      | 16km/h |      | 10km/h           |                |
|                                     |              |      |              |              | Load            | Rota | Load   | Rota |                  |                |
| 4.00-8                              | 20           | 3.0  | 423          | 121          | 1090            | 840  | 995    | 765  | 840              | H992A<br>SOLID |
|                                     |              | 3.75 | 423          | 125          | 1175            | 905  | 1080   | 830  | 910              |                |
| 5.00-8                              | 24           | 3.0  | 469          | 146          | 1255            | 965  | 1145   | 880  | 960              |                |
| 18X7-8                              | 24           | 4.33 | 457          | 170          | 2430            | 1870 | 2215   | 1705 | 1870             |                |
| 6.00-9                              | 24           | 4.0  | 545          | 160          | 1975            | 1520 | 1805   | 1390 | 1520             |                |
| 6.50-10                             | 28           | 5.0  | 597          | 178          | 2715            | 2090 | 2485   | 1910 | 2095             |                |
| 7.00-9                              | 28           | 5.0  | 578          | 185          | 2670            | 2005 | 2440   | 1875 | 2055             |                |
| 7.00-12                             | 29           | 5.0  | 683          | 192          | 3105            | 2390 | 2835   | 2180 | 2390             |                |
| 8.25-12                             | 38           | 6.5  | 735          | 236          | 3425            | 2635 | 3125   | 2405 | 2635             |                |
| 28X9-15<br>(8.15-15)<br>(225/75-15) | 35           | 7.0  | 706          | 225          | 4060            | 3125 | 3710   | 2855 | 3125             |                |
| 8.25-15                             | 38           | 6.5  | 847          | 236          | 5085            | 3910 | 4640   | 3570 | 3910             |                |

▲ CLICK/QUICK type solid tyre available



## H992B EXTRA POWER STRONG INDUSTRIAL SOLID

High quality raw material support and unique formula design.  
The tyre enjoys outstanding performance at all aspects.



| Size                                | T.D.<br>(mm) | S.R. | O.D.<br>(mm) | S.W.<br>(mm) | Max Loading(kg) |      |        |      |                  | Code           |
|-------------------------------------|--------------|------|--------------|--------------|-----------------|------|--------|------|------------------|----------------|
|                                     |              |      |              |              | Forklift        |      |        |      | Other Industrial |                |
|                                     |              |      |              |              | 10km/h          |      | 16km/h |      | 10km/h           |                |
| 5.00-8                              | 24           | 3.0  | 469          | 146          | 1255            | 965  | 1145   | 880  | 960              | H992B<br>SOLID |
| 18X7-8                              | 24           | 4.33 | 457          | 170          | 2430            | 1870 | 2215   | 1705 | 1870             |                |
| 6.00-9                              | 24           | 4.0  | 545          | 160          | 1975            | 1520 | 1805   | 1390 | 1520             |                |
| 6.50-10                             | 28           | 5.0  | 597          | 178          | 2715            | 2090 | 2485   | 1910 | 2095             |                |
| 7.00-9                              | 28           | 5.0  | 578          | 185          | 2670            | 2005 | 2440   | 1875 | 2055             |                |
| 7.00-12                             | 29           | 5.0  | 683          | 192          | 3105            | 2390 | 2835   | 2180 | 2390             |                |
| 8.25-12                             | 38           | 6.5  | 735          | 236          | 3425            | 2635 | 3125   | 2405 | 2635             |                |
| 28X9-15<br>(8.15-15)<br>(225/75-15) | 35           | 7.0  | 706          | 225          | 4060            | 3125 | 3710   | 2855 | 3125             |                |
| 8.25-15                             | 38           | 6.5  | 847          | 236          | 5085            | 3910 | 4640   | 3570 | 3910             |                |

## H993 PERFECT BALANCE INNOVATIVE TREAD SOLID

High land ratio for longer life.  
It's the best choice for balanced forklift and other industrial vehicles.



| Size    | T.D.<br>(mm) | S.R. | O.D.<br>(mm) | S.W.<br>(mm) | Max Loading(kg) |      |        |      |                  | Code          |
|---------|--------------|------|--------------|--------------|-----------------|------|--------|------|------------------|---------------|
|         |              |      |              |              | Forklift        |      |        |      | Other Industrial |               |
|         |              |      |              |              | 10km/h          |      | 16km/h |      | 10km/h           |               |
| 16X6-8  | 17           | 4.33 | 418          | 162          | 1545            | 1190 | 1410   | 1085 | 1185             | H993<br>SOLID |
| 21X8-9  | 27           | 6.0  | 535          | 207          | 2890            | 2225 | 2645   | 2035 | 2230             |               |
| 23X9-10 | 26           | 6.5  | 595          | 225          | 3730            | 2870 | 3405   | 2620 | 2865             |               |

## H994 KING STAR SOLID

Best cutting resistance.  
Expert low rolling resistance.  
Longest lifespan.



| Size                                | T.D.<br>(mm) | S.R. | O.D.<br>(mm) | S.W.<br>(mm) | Max Loading(kg) |      |        |      |                  | Code          |
|-------------------------------------|--------------|------|--------------|--------------|-----------------|------|--------|------|------------------|---------------|
|                                     |              |      |              |              | Forklift        |      |        |      | Other Industrial |               |
|                                     |              |      |              |              | 10km/h          |      | 16km/h |      | 10km/h           |               |
| 5.00-8                              | 24           | 3.0  | 469          | 146          | 1255            | 965  | 1145   | 880  | 960              | H994<br>SOLID |
| 18X7-8                              | 24           | 4.33 | 457          | 170          | 2430            | 1870 | 2215   | 1705 | 1870             |               |
| 6.00-9                              | 24           | 4.0  | 545          | 160          | 1975            | 1520 | 1805   | 1390 | 1520             |               |
| 6.50-10                             | 28           | 5.0  | 597          | 178          | 2715            | 2090 | 2485   | 1910 | 2095             |               |
| 7.00-9                              | 28           | 5.0  | 578          | 185          | 2670            | 2005 | 2440   | 1875 | 2055             |               |
| 7.00-12                             | 29           | 5.0  | 683          | 192          | 3105            | 2390 | 2835   | 2180 | 2390             |               |
| 8.25-12                             | 38           | 6.5  | 735          | 236          | 3425            | 2635 | 3125   | 2405 | 2635             |               |
| 28X9-15<br>(8.15-15)<br>(225/75-15) | 35           | 7.0  | 706          | 225          | 4060            | 3125 | 3710   | 2855 | 3125             |               |
| 8.25-15                             | 38           | 6.5  | 847          | 236          | 5085            | 3910 | 4640   | 3570 | 3910             |               |
| 16X6-8                              | 17           | 4.33 | 418          | 162          | 1545            | 1190 | 1410   | 1085 | 1185             |               |
| 21X8-9                              | 27           | 6.0  | 535          | 207          | 2890            | 2225 | 2645   | 2035 | 2230             |               |
| 23X9-10                             | 26           | 6.5  | 595          | 225          | 3730            | 2870 | 3405   | 2620 | 2865             |               |
| 9.00-20                             | 40           | 6.5  | 1038         | 259          | 6160            | 5135 | 5630   | 4690 | 4745             |               |
| 9.00-20                             |              | 7.0  | 1038         | 259          | 6365            | 5305 | 5815   | 4845 | 4905             |               |
| 10.00-20                            | 40           | 7.5  | 1073         | 278          | 7075            | 5895 | 6460   | 5385 | 5450             |               |
| 10.00-20                            |              | 8.0  | 1073         | 278          | 7300            | 6085 | 6670   | 5560 | 5630             |               |
| 11.00-20                            | 45           | 7.5  | 1095         | 300          | 7470            | 6225 | 6820   | 5685 | 5750             |               |
| 11.00-20                            |              | 8.0  | 1095         | 300          | 7715            | 6430 | 7045   | 5870 | 5940             |               |
| 12.00-20                            | 45           | 8.0  | 1180         | 310          | 8640            | 7200 | 7885   | 6570 | 6650             |               |
| 12.00-20                            |              | 8.5  | 1180         | 310          | 8920            | 7435 | 8140   | 6785 | 6865             |               |



## H992A NON-MARKING SOLID

Environmental friendly.  
Static eletricity free.



| Size                                | T.D.<br>(mm) | S.R. | O.D.<br>(mm) | S.W.<br>(mm) | Max Loading(kg) |      |        |      |                  | Code           |
|-------------------------------------|--------------|------|--------------|--------------|-----------------|------|--------|------|------------------|----------------|
|                                     |              |      |              |              | Forklift        |      |        |      | Other Industrial |                |
|                                     |              |      |              |              | 10km/h          |      | 16km/h |      | 10km/h           |                |
|                                     |              |      |              |              | Load            | Rota | Load   | Rota |                  |                |
| 4.00-8                              | 20           | 3.0  | 423          | 121          | 1090            | 840  | 995    | 765  | 840              | H992A<br>SOLID |
|                                     |              | 3.75 | 423          | 125          | 1175            | 905  | 1080   | 830  | 910              |                |
| 5.00-8                              | 24           | 3.0  | 469          | 146          | 1255            | 965  | 1145   | 880  | 960              |                |
| 18X7-8                              | 24           | 4.33 | 457          | 170          | 2430            | 1870 | 2215   | 1705 | 1870             |                |
| 6.00-9                              | 24           | 4.0  | 545          | 160          | 1975            | 1520 | 1805   | 1390 | 1520             |                |
| 6.50-10                             | 28           | 5.0  | 597          | 178          | 2715            | 2090 | 2485   | 1910 | 2095             |                |
| 7.00-9                              | 28           | 5.0  | 578          | 185          | 2670            | 2005 | 2440   | 1875 | 2055             |                |
| 7.00-12                             | 29           | 5.0  | 683          | 192          | 3105            | 2390 | 2835   | 2180 | 2390             |                |
| 8.25-12                             | 38           | 6.5  | 735          | 236          | 3425            | 2635 | 3125   | 2405 | 2635             |                |
| 8.25-15                             | 38           | 6.5  | 847          | 236          | 5085            | 3910 | 4640   | 3570 | 3910             |                |
| 28X9-15<br>(8.15-15)<br>(225/75-15) | 35           | 7.0  | 706          | 225          | 4060            | 3125 | 3710   | 2855 | 3125             |                |

- NON-MARKING SOLID TIRES OF H991A, H991B, H992B, AND H993 ARE AVAILABLE ALSO.
- OTHER COLORS ARE AVAILABLE TOO.

## TW993 NON-MARKING SOLID FOR AIRPORT WORKING

High quality raw material support and unique formula design.  
The tyre enjoys outstanding performance at all aspects.



| Size   | T.D.<br>(mm) | S.R. | O.D.<br>(mm) | S.W.<br>(mm) | Max Loading(kg) |      |        |      |                  | Code  |
|--------|--------------|------|--------------|--------------|-----------------|------|--------|------|------------------|-------|
|        |              |      |              |              | Forklift        |      |        |      | Other Industrial |       |
|        |              |      |              |              | 10km/h          |      | 16km/h |      | 10km/h           |       |
|        |              |      |              |              | Load            | Rota | Load   | Rota |                  |       |
| 4.00-8 | 4            | 3.75 | 326          | 110          | 1090            | 840  | 995    | 765  | 840              | TW993 |

## TW994 NON-MARKING SOLID FOR AIRPORT WORKING - SMOOTH

Long life / Low rolling resistance / Environmental friendly.



| Size  | T.D.<br>(mm) | S.R. | O.D.<br>(mm) | S.W.<br>(mm) | Max Loading(kg) |      |        |      |                  | Code  |
|-------|--------------|------|--------------|--------------|-----------------|------|--------|------|------------------|-------|
|       |              |      |              |              | Forklift        |      |        |      | Other Industrial |       |
|       |              |      |              |              | 10km/h          |      | 16km/h |      | 10km/h           |       |
|       |              |      |              |              | Load            | Rota | Load   | Rota |                  |       |
| 200-8 |              |      |              |              |                 |      |        |      |                  | TW994 |

## H995 NON-MARKING SOLID WITH WHEEL MOUNTED

Environmental friendly.  
Static eletricity free.



| Size    | T.D.<br>(mm) | S.R. | O.D.<br>(mm) | S.W.<br>(mm) | Max Loading(kg) |      |        |      |                  | Code |
|---------|--------------|------|--------------|--------------|-----------------|------|--------|------|------------------|------|
|         |              |      |              |              | Forklift        |      |        |      | Other Industrial |      |
|         |              |      |              |              | 10km/h          |      | 16km/h |      | 10km/h           |      |
|         |              |      |              |              | Load            | Rota | Load   | Rota |                  |      |
| 406X125 |              |      |              |              |                 |      |        |      |                  | H995 |





# AGRICULTURAL TYRE



*Tire Direct*   
La nueva generación





**H657-1/2/3/4/5** R-1 SUPER FARM TYRE

For general farm tractors.  
Provides good cutting resistance and longer lifetime.

| Size    | PR | T.D.<br>(mm) | S.R.  | S.W.<br>(mm) | O.D.<br>(mm) | Loading (kg)<br>@ 30km/h | Pressure (kpa)<br>@ 30km/h | Type | Code       |
|---------|----|--------------|-------|--------------|--------------|--------------------------|----------------------------|------|------------|
| 6.00-12 | 6  | 20           | 4.50E | 165          | 640          | 405                      | 250                        | TT   | H657-1 R-1 |
| 6.00-12 | 6  | 20           | 4.50E | 165          | 640          | 405                      | 250                        |      | H657-2 R-1 |
| 6.00-12 | 6  | 23           | 4.50E | 165          | 640          | 405                      | 250                        |      | H657-3 R-1 |
| 6.00-16 | 6  | 24           | 4.50E | 165          | 745          | 495                      | 250                        |      | H657-4 R-1 |
| 7.50-16 | 6  | 22           | 5.50F | 205          | 810          | 650                      | 210                        |      | H657-5 R-1 |
|         | 8  |              |       |              |              | 800                      | 280                        |      |            |



**H657-6** R-1 SUPER FARM TYRE FOR DRIVE WHEEL

Tractor tire for drive wheel.  
Powerful traction and good cutting resistance.

| Size    | PR | T.D.<br>(mm) | S.R. | S.W.<br>(mm) | O.D.<br>(mm) | Loading (kg)<br>@ 30km/h | Pressure (kpa)<br>@ 30km/h | Type | Code       |
|---------|----|--------------|------|--------------|--------------|--------------------------|----------------------------|------|------------|
| 11.2-24 | 10 | 32           | W10  | 285          | 1105         | 1380                     | 300                        | TT   | H657-6 R-1 |
| 14.9-24 | 10 | 38           | W13  | 378          | 1265         | 1990                     | 230                        |      |            |
| 16.9-28 | 10 | 39           | W15L | 430          | 1435         | 2380                     | 200                        |      |            |
|         | 12 |              |      |              |              | 2580                     | 230                        |      |            |
| 16.9-30 | 12 | 39           | W15L | 430          | 1485         | 2730                     | 240                        |      |            |
| 16.9-34 | 10 | 39           | W15L | 430          | 1585         | 2605                     | 200                        |      |            |
|         | 12 |              |      |              |              | 2945                     | 240                        |      |            |
| 18.4-34 | 12 | 36           | W16L | 467          | 1655         | 3375                     | 230                        |      |            |



**H657-7** R-1 SUPER FARM TYRE FOR DRIVE WHEEL

Tractor tire for drive wheel.  
Good traction and high grip ability.

| Size    | PR | T.D.<br>(mm) | S.R.  | S.W.<br>(mm) | O.D.<br>(mm) | Loading (kg)<br>@ 30km/h | Pressure (kpa)<br>@ 30km/h | Type | Code       |
|---------|----|--------------|-------|--------------|--------------|--------------------------|----------------------------|------|------------|
| 7.50-20 | 6  | 25.5         | 5.50F | 205          | 910          | 760                      | 210                        | TT   | H657-7 R-1 |
|         | 8  |              |       |              |              | 900                      | 250                        |      |            |
| 8.3-24  | 6  | 30           | W7    | 210          | 995          | 810                      | 240                        |      |            |
|         | 8  |              |       |              |              | 950                      | 300                        |      |            |
| 9.5-20  | 8  | 28           | W8    | 240          | 950          | 955                      | 300                        |      |            |
|         | 10 |              |       |              |              | 1190                     | 370                        |      |            |
| 9.5-24  | 8  | 31           | W8    | 240          | 1050         | 1110                     | 280                        |      |            |
|         | 10 |              |       |              |              | 1300                     | 370                        |      |            |
| 11.2-28 | 8  | 35           | W10   | 285          | 1205         | 1305                     | 240                        |      |            |
|         | 10 |              |       |              |              | 1515                     | 300                        |      |            |



# H657-8/10

R-1 SUPER FARM TYRE FOR DRIVE WHEEL

Tractor tire for drive wheel and load wheel.  
Excellent traction, self-cleaning and cutting resistance.



H657-8      H657-10

| Size   | PR | T.D.<br>(mm) | S.R. | S.W.<br>(mm) | O.D.<br>(mm) | Loading (kg)<br>@ 30km/h | Pressure (kpa)<br>@ 30km/h | Type | Code        |
|--------|----|--------------|------|--------------|--------------|--------------------------|----------------------------|------|-------------|
| 8.3-20 | 6  | 28           | W7   | 210          | 895          | 695                      | 240                        | TT   | H657-8 R-1  |
|        | 8  |              |      |              |              | 880                      | 300                        |      |             |
| 9.5-20 | 8  | 27           | W8   | 240          | 950          | 955                      | 280                        | TT   | H657-10 R-1 |
|        | 10 |              |      |              |              | 1190                     | 370                        |      |             |

# H657-11/12

R-1 SUPER FARM TYRE FOR DRIVE WHEEL

Tractor tire for drive wheel.  
Powerful traction and good cutting resistance.



H657-11      H657-12

| Size    | PR | T.D.<br>(mm) | S.R. | S.W.<br>(mm) | O.D.<br>(mm) | Loading (kg)<br>@ 30km/h | Pressure (kpa)<br>@ 30km/h | Type | Code        |
|---------|----|--------------|------|--------------|--------------|--------------------------|----------------------------|------|-------------|
| 14.9-26 | 10 | 42           | W13  | 378          | 1315         | 2055                     | 230                        | TT   | H657-11 R-1 |
|         | 12 |              |      |              |              | 2310                     | 260                        |      |             |
| 18.4-30 | 12 | 35           | W16L | 467          | 1550         | 3180                     | 230                        | TT   | H657-12 R-1 |
| 15.5-38 | 10 | 34           | W14L | 395          | 1570         | 2320                     | 230                        |      |             |
|         | 12 |              |      |              |              | 2700                     | 260                        |      |             |



H657-13



H657-14



H657-15

# H657-13/14/15

R-1(LS-1) SUPER TRACTOR & HARVESTER TYRE

Tractor/Harvester tire for drive wheel and load wheel.  
Excellent traction, self-cleaning and cutting resistance.

| Size    | PR | T.D.<br>(mm) | S.R. | S.W.<br>(mm) | O.D.<br>(mm) | Loading (kg)<br>@ 30km/h | Pressure (kpa)<br>@ 30km/h | Type | Code             |
|---------|----|--------------|------|--------------|--------------|--------------------------|----------------------------|------|------------------|
| 12.4-24 | 8  | 36           | W11  | 315          | 1160         | 1415                     | 230                        | TT   | H657-13 R-1/LS-1 |
|         | 10 |              |      |              |              | 1650                     | 280                        |      |                  |
| 12.4-28 | 8  | 36           | W11  | 315          | 1260         | 1510                     | 230                        | TT   | H657-14 R-1/LS-1 |
|         | 10 |              |      |              |              | 1760                     | 280                        |      |                  |
| 14.9-24 | 10 | 38           | W13  | 378          | 1265         | 1990                     | 230                        | TT   | H657-14 R-1/LS-1 |
| 14.9-28 | 10 | 38           | W13  | 378          | 1365         | 2120                     | 230                        |      |                  |
| 18.4-38 | 12 | 41           | W16L | 467          | 1755         | 3575                     | 230                        | TT   | H657-15 R-1/LS-1 |
| 15-24   | 10 | 37           | DW14 | 410          | 1330         | 2800                     | 280                        |      |                  |

# H657-16 CR-1 FARM TYRE

Tractor tire for drive wheel with good cutting resistance for longer tire life.



| Size    | PR | T.D.<br>(mm) | S.R. | S.W.<br>(mm) | O.D.<br>(mm) | Loading (kg)<br>@ 30km/h | Pressure (kpa)<br>@ 30km/h | Type | Code         |
|---------|----|--------------|------|--------------|--------------|--------------------------|----------------------------|------|--------------|
| 11-38   | 10 | 35           | W10  | 305          | 1540         | 1965                     | 200                        | TT   | H657-16 CR-1 |
| 12.4-48 | 12 | 36           | W11  | 315          | 1760         | 2975                     | 320                        |      |              |
| 14.9-48 | 12 | 38           | W13  | 378          | 1875         | 3350                     | 270                        |      |              |



# H657-17/18

R-1/HR-1 SUPER FARM TYRE (DEEP TREAD)

Specially designed lug profiles for full traction power and self-cleaning.



H657-17      H657-18

| Size    | PR | T.D.<br>(mm) | S.R.  | S.W.<br>(mm) | O.D.<br>(mm) | Loading (kg)<br>@ 30km/h | Pressure (kpa)<br>@ 30km/h | Type | Code                |
|---------|----|--------------|-------|--------------|--------------|--------------------------|----------------------------|------|---------------------|
| 6.00-12 | 6  | 30           | 4.50E | 165          | 640          | 405                      | 250                        | TT   | H657-17<br>R-1/HR-1 |
| 6.00-16 | 6  | 28           | 4.50E | 165          | 745          | 495                      | 250                        | TT   | H657-18<br>R-1/HR-1 |

# H657-19/20

R-1/HR-1 SUPER FARM TYRE ( EXTRA DEEP TREAD)

Powerful pattern & Wear resistance.  
Longer life & High durability.



H657-19      H657-20

| Size    | PR | T.D.<br>(mm) | S.R.  | S.W.<br>(mm) | O.D.<br>(mm) | Loading (kg)<br>@ 30km/h | Pressure (kpa)<br>@ 30km/h | Type | Code                |
|---------|----|--------------|-------|--------------|--------------|--------------------------|----------------------------|------|---------------------|
| 6.50-16 | 6  | 38           | 5.00F | 180          | 765          | 565                      | 250                        | TT   | H657-19<br>R-1/HR-1 |
| 9.5-24  | 8  | 42           | W8    | 240          | 1050         | 1110                     | 280                        | TT   | H657-20<br>R-1/HR-1 |
|         | 10 |              |       |              |              | 1300                     | 370                        |      |                     |
| 11.2-24 | 10 | 42           | W10   | 285          | 1105         | 1380                     | 300                        |      |                     |

# H657-21

R-1/HR-1 SUPER FARM TYRE (DEEP TREAD)

Specially designed lug profiles for full traction power and self-cleaning.



| Size    | PR | T.D.<br>(mm) | S.R.  | S.W.<br>(mm) | O.D.<br>(mm) | Loading (kg)<br>@ 30km/h | Pressure (kpa)<br>@ 30km/h | Type | Code                |
|---------|----|--------------|-------|--------------|--------------|--------------------------|----------------------------|------|---------------------|
| 6.00-16 | 6  | 31           | 4.50E | 165          | 745          | 495                      | 250                        | TT   | H657-21<br>R-1/HR-1 |
| 6.50-16 | 6  | 32           | 5.00F | 180          | 765          | 565                      | 250                        |      |                     |
| 7.50-16 | 6  | 33           | 5.50F | 205          | 810          | 650                      | 210                        |      |                     |
|         | 8  |              |       |              |              | 800                      | 280                        |      |                     |
| 8.3-20  | 6  | 38           | W7    | 210          | 895          | 695                      | 240                        |      |                     |
|         | 8  |              |       |              |              | 880                      | 300                        |      |                     |
| 8.3-24  | 6  | 38           | W7    | 210          | 995          | 810                      | 240                        |      |                     |
|         | 8  |              |       |              |              | 950                      | 300                        |      |                     |
| 9.5-20  | 8  | 42           | W8    | 240          | 950          | 955                      | 280                        |      |                     |
|         | 10 |              |       |              |              | 1190                     | 370                        |      |                     |
| 9.5-24  | 8  | 42           | W8    | 240          | 1050         | 1110                     | 280                        |      |                     |
|         | 10 |              |       |              |              | 1300                     | 370                        |      |                     |
| 11.2-24 | 10 | 42           | W10   | 285          | 1105         | 1380                     | 300                        |      |                     |
| 11.2-28 | 8  | 45           | W10   | 285          | 1205         | 1305                     | 240                        |      |                     |
|         | 10 |              |       |              |              | 1515                     | 300                        |      |                     |
| 12.4-28 | 8  | 45           | W11   | 315          | 1260         | 1510                     | 230                        |      |                     |
|         | 10 |              |       |              |              | 1760                     | 280                        |      |                     |
| 13.6-24 | 10 | 48           | W12   | 345          | 1210         | 1790                     | 250                        |      |                     |
| 16.9-34 | 10 | 50           | W15L  | 430          | 1585         | 2605                     | 200                        |      |                     |
|         | 12 |              |       |              |              | 2945                     | 240                        |      |                     |
| 12-38   | 8  | 37           | DW11  | 356          | 1575         | 1570                     | 140                        |      |                     |
|         | 10 |              |       |              |              | 1850                     | 180                        |      |                     |
| 11-32   | 6  | 33           | W10   | 305          | 1360         | 1000                     | 140                        |      |                     |
|         | 8  |              |       |              |              | 1250                     | 180                        |      |                     |



## H657-22 R-2 HARVESTER TYRE

Larger traction tire for drive wheel.  
Powerful traction, excellent wear resistance and self-cleaning.



| Size     | PR | T.D.<br>(mm) | S.R. | S.W.<br>(mm) | O.D.<br>(mm) | Loading (kg)<br>@ 30km/h | Pressure (kpa)<br>@ 30km/h | Type | Code           |
|----------|----|--------------|------|--------------|--------------|--------------------------|----------------------------|------|----------------|
| 9.5-38   | 10 | 52           | W8   | 240          | 1435         | 1400                     | 280                        | TT   | H657-22<br>R-2 |
| 19.5L-24 | 12 | 76           | DW16 | 495          | 1382         | 2145                     | 210                        |      |                |
| 16.9-28  | 12 | 69           | W15L | 430          | 1478         | 2580                     | 230                        |      |                |
| 18.4-30  | 12 | 81           | W16L | 467          | 1597         | 3180                     | 230                        |      |                |
| 23.1-26  | 14 | 89           | DW20 | 587          | 1662         | 3970                     | 200                        |      |                |
| 28L-26   | 14 | 89           | DW25 | 715          | 1672         | 4245                     | 170                        |      |                |
| 20.8-38  | 12 | 77           | W18L | 528          | 1887         | 4000                     | 200                        |      |                |

## H657-23 R-1/IR-1 IRRIGATION TYRE

Special design for irrigation application.  
Good self cleaning property and sufficient traction.



| Size    | PR | T.D.<br>(mm) | S.R. | S.W.<br>(mm) | O.D.<br>(mm) | Loading (kg)<br>@ 30km/h | Pressure (kpa)<br>@ 30km/h | Type | Code                |
|---------|----|--------------|------|--------------|--------------|--------------------------|----------------------------|------|---------------------|
| 11.2-24 | 6  | 28.5         | W10  | 1103         | 285          | 1045                     | 180                        | TT   | H657-23<br>R-1/IR-1 |
| 12.4-24 | 8  | 28.5         | W11  | 1160         | 315          | 1415                     | 230                        |      |                     |
| 14.9-24 | 8  | 31           | W13  | 1265         | 378          | 1760                     | 180                        |      |                     |
| 11.2-38 | 10 | 30           | W10  | 1448         | 285          | 2000                     | 170                        |      |                     |

## H657-24 M-Z HARVESTER FRONT WHEEL

Comfortable operation.  
Longer tyre lifetime.



| Size     | PR | T.D.<br>(mm) | S.R.  | S.W.<br>(mm) | O.D.<br>(mm) | Loading (kg)<br>@ 30km/h | Pressure (kpa)<br>@ 30km/h | Type | Code           |
|----------|----|--------------|-------|--------------|--------------|--------------------------|----------------------------|------|----------------|
| 12.00-18 | 10 | 18           | 9.00V | 325          | 1085         | 1800                     | 320                        | TT   | H657-24<br>R-1 |
|          | 12 |              |       |              |              | 2300                     | 420                        |      |                |

## H657-25 PR-1 SUPER PADDY FIELD TYRE

Powerful traction, excellent driving stability and Steering Accuracy.  
Longer life and High durability, Wear resistance, Outstanding Cold & Heat resistance.



| Size    | PR | T.D.<br>(mm) | S.R.  | S.W.<br>(mm) | O.D.<br>(mm) | Loading (kg)<br>@ 30km/h | Pressure (kpa)<br>@ 30km/h | Type | Code            |
|---------|----|--------------|-------|--------------|--------------|--------------------------|----------------------------|------|-----------------|
| 6.00-12 | 6  | 45.5         | 4.5E  | 165          | 690          | 425                      | 270                        | TT   | H657-25<br>PR-1 |
| 6.50-16 | 8  | 57           | 5.00F | 165          | 830          | 565                      | 250                        |      |                 |
| 7.50-16 | 10 | 64           | 5.50F | 195          | 890          | 750                      | 300                        |      |                 |
| 8.3-20  | 10 | 64           | W7    | 210          | 950          | 970                      | 270                        |      |                 |
| 8.3-24  | 10 | 64           | W7    | 210          | 1050         | 1135                     | 270                        |      |                 |
| 9.5-20  | 10 | 78           | W8    | 240          | 1050         | 1140                     | 240                        |      |                 |
| 9.5-24  | 10 | 78           | W8    | 240          | 1150         | 1345                     | 240                        |      |                 |
| 11-23   | 12 | 90           | W10   | 305          | 1460         | 1080                     | 160                        |      |                 |
| 11.2-24 | 12 | 83           | W10   | 285          | 1205         | 1465                     | 210                        |      |                 |
| 12.4-26 | 12 | 86           | W11   | 315          | 1265         | 1728                     | 200                        |      |                 |
| 12.4-28 | 12 | 86           | W11   | 315          | 1315         | 1785                     | 200                        |      |                 |
| 13.6-24 | 12 | 90           | W12   | 345          | 1210         | 1790                     | 250                        |      |                 |
| 13.6-38 | 12 | 90           | W12   | 345          | 1710         | 2675                     | 230                        |      |                 |
| 14.9-24 | 12 | 90           | W13   | 378          | 1260         | 1990                     | 230                        |      |                 |
| 14.9-26 | 12 | 90           | W13   | 378          | 1315         | 2055                     | 230                        |      |                 |
| 14.9-28 | 12 | 90           | W13   | 378          | 1365         | 2120                     | 230                        |      |                 |
| 14.9-30 | 12 | 95           | W13   | 378          | 1415         | 2190                     | 230                        |      |                 |
| 16.9-30 | 12 | 95           | W15L  | 430          | 1485         | 2730                     | 240                        |      |                 |
| 16.9-34 | 12 | 95           | W15L  | 430          | 1585         | 2605                     | 200                        |      |                 |
| 18.4-34 | 12 | 95           | W16L  | 467          | 1655         | 3375                     | 230                        |      |                 |
| 18.4-38 | 12 | 95           | W16L  | 467          | 1755         | 3575                     | 230                        |      |                 |



# H657-26

PR-1 SUPER PADDY FIELD TYRE

Powerful traction, excellent driving stability and Steering Accuracy.  
Longer life and High durability, Wear resistance, Outstanding Cold & Heat resistance.



| Size    | PR | T.D.<br>(mm) | S.R. | S.W.<br>(mm) | O.D.<br>(mm) | Loading (kg)<br>@ 30km/h | Pressure (kpa)<br>@ 30km/h | Type | Code            |
|---------|----|--------------|------|--------------|--------------|--------------------------|----------------------------|------|-----------------|
| 11-32   | 12 | 90           | W10  | 305          | 1460         | 1080                     | 160                        | TT   | H657-26<br>PR-1 |
| 13.6-24 | 12 | 90           | W12  | 345          | 1210         | 1790                     | 250                        |      |                 |
| 14.9-24 | 12 | 90           | W13  | 378          | 1265         | 1990                     | 230                        |      |                 |
| 14.9-26 | 12 | 90           | W13  | 378          | 1315         | 2055                     | 230                        |      |                 |
| 14.9-28 | 12 | 90           | W13  | 378          | 1365         | 2120                     | 230                        |      |                 |
| 16.9-28 | 12 | 90           | W15L | 430          | 1478         | 2580                     | 230                        |      |                 |
| 14.9-30 | 12 | 95           | W13  | 378          | 1415         | 2190                     | 230                        |      |                 |
| 16.9-30 | 12 | 95           | W15L | 430          | 1485         | 2730                     | 240                        |      |                 |
| 16.9-34 | 12 | 95           | W15L | 430          | 1585         | 2605                     | 200                        |      |                 |
| 18.4-38 | 12 | 95           | W16L | 467          | 1755         | 3575                     | 230                        |      |                 |
| 20.8-38 | 12 | 95           | W18L | 528          | 1887         | 4000                     | 200                        |      |                 |

# H657-27

R-1/HR-1 OVER SIZE AG TYRE FOR DRIVE WHEEL  
FIELD & ROAD USE, DOUBLE DUTY

Confident grip & good self-cleaning  
Extra deep lug depth for long wearing.  
Import design.



|   | Size                    | PR | T.D.<br>(mm) | S.R. | S.W.<br>(mm) | O.D.<br>(mm) | Loading (kg)<br>@ 30km/h | Pressure (kpa)<br>@ 30km/h | Type | Code                   |
|---|-------------------------|----|--------------|------|--------------|--------------|--------------------------|----------------------------|------|------------------------|
| ☆ | 12.4-28                 | 10 | 39           | W11  | 315          | 1276         | 1760                     | 280                        | TT   | H657-27<br>R-1<br>HR-1 |
| ☆ | 13.6-28                 | 10 | 40           | W12  | 345          | 1320         | 1910                     | 250                        |      |                        |
| ☆ | 14.9-28                 | 10 | 40           | W13  | 378          | 165          | 2120                     | 230                        |      |                        |
| ☆ | 16.9-30                 | 12 | 40           | W15L | 430          | 1485         | 2730                     | 240                        |      |                        |
| ☆ | 18.4-30<br>(18.4/15-30) | 12 | 44           | W16L | 467          | 1550         | 3180                     | 230                        |      |                        |
| ☆ | 15.5-38                 | 12 | 42           | W14L | 395          | 1570         | 2700                     | 260                        |      |                        |





H889



H206



H207



H208

## H889 H206 H207 H208

AG FRONT WHEEL & TRAILER WHEEL

Long tyre life with wear resistance.

| Size    | PR | T.D.<br>(mm) | S.R.  | S.W.<br>(mm) | O.D.<br>(mm) | Loading (kg)<br>@ 30km/h | Pressure (kpa)<br>@ 30km/h | Type | Code |
|---------|----|--------------|-------|--------------|--------------|--------------------------|----------------------------|------|------|
| 4.50-16 | 6  | 7            | 3.00D | 130          | 655          | 400                      | 390                        | TT   | H889 |
| 5.00-14 | 4  | 7            | 3.00D | 130          | 620          | 365                      | 340                        |      |      |
| 4.50-14 | 4  | 7            | 3.00D | 122          | 606          | 345                      | 340                        |      |      |
| 4.00-14 | 4  | 7            | 3.00D | 110          | 590          | 270                      | 340                        |      |      |
| 4.50-12 | 4  | 6            | 3.00D | 122          | 550          | 307                      | 340                        |      |      |
| 5.00-14 | 8  | 9.5          | 3.00D | 130          | 620          | 500                      | 420                        | TT   | H206 |
| 4.50-14 | 8  | 8            | 3.00D | 122          | 606          | 400                      | 420                        | TT   | H207 |
| 6.00-16 | 6  | 8            | 4.00E | 160          | 740          | 560                      | 340                        | TT   | H208 |
| 5.50-16 | 6  | 8            | 4.00E | 150          | 710          | 525                      | 370                        |      |      |
| 5.00-16 | 6  | 7.5          | 4.00E | 142          | 680          | 500                      | 370                        |      |      |
| 4.50-16 | 6  | 7            | 3.00D | 130          | 655          | 400                      | 390                        |      |      |
| 4.00-14 | 4  | 7            | 3.00D | 110          | 590          | 270                      | 340                        |      |      |
| 4.00-12 | 4  | 7            | 3.00D | 110          | 535          | 250                      | 340                        |      |      |



H209A



H209B

## H209A H209B

F-2 TRIPLE RIB FARM STEERING  
F-2

Better Steering with good stability / Self cleaning and damage resistance.  
Better tire life / High load capacity.

| Size     | PR | T.D.<br>(mm) | S.R.  | S.W.<br>(mm) | O.D.<br>(mm) | Loading (kg)<br>@ 30km/h | Pressure (kpa)<br>@ 30km/h | Type  | Code         |
|----------|----|--------------|-------|--------------|--------------|--------------------------|----------------------------|-------|--------------|
| 4.00-14  | 4  | 7            | 3.00D | 110          | 590          | 270                      | 34                         | TT    | H209A<br>F-2 |
| 4.00-16  | 4  | 8            | 3.00D | 110          | 640          | 300                      | 340                        |       |              |
| 5.00-15  | 6  | 9.5          | 4J    | 140          | 665          | 465                      | 420                        |       |              |
| 5.50-16  | 6  | 13           | 4.00E | 10           | 710          | 525                      | 370                        |       |              |
| 7.50-16  | 8  | 15           | 5.50F | 205          | 810          | 870                      | 370                        | TT/TL |              |
| 10.00-16 | 10 | 23           | W8L   | 275          | 910          | 1325                     | 340                        | TL    | H209B<br>F-2 |
| 11.00-16 | 10 | 23           | W10L  | 315          | 970          | 1485                     | 310                        |       |              |
| 7.50-16  | 10 | 19           | 5.50F | 210          | 810          | 1000                     | 450                        | TT/TL |              |





# MINING TYRE



*Tire Direct*   
La nueva generación



## H988 MINING TRUCK TIRE

For dump trucks on mining and logging service.  
Deeper tread pattern for powerful traction and long mileage.



| Size     | PR | T.D.<br>(mm) | S.R.  | S.W.<br>(mm) | O.D.<br>(mm) | Max Loading (kg) |        | Pressure<br>(kpa) | Load<br>Index | Code |
|----------|----|--------------|-------|--------------|--------------|------------------|--------|-------------------|---------------|------|
|          |    |              |       |              |              | Dual             | Single |                   |               |      |
| 12.00-20 | 20 | 32           | 8.5   | 315          | 1145         | 3450             | 4000   | 810/880           | 151/156       | H988 |
| 11.00-20 | 18 | 30           | 8.0   | 293          | 1105         | 3150             | 3650   | 840/910           | 148/153       |      |
| 10.00-20 | 18 | 30           | 7.5   | 278          | 1073         | 2900             | 3350   | 840/910           | 145/150       |      |
| 9.00-20  | 16 | 25           | 7.0   | 259          | 1038         | 2500             | 2900   | 810/880           | 140/145       |      |
| 8.25-20  | 16 | 20           | 6.5   | 240          | 992          | 2180             | 2460   | 840/910           | 135/139       |      |
| 9.00-16  | 16 | 22           | 6.50H | 255          | 902          | 1850             | 2120   | 730               | 129/134       |      |
| 8.25-16  | 16 | 18           | 6.50H | 235          | 867          | 1600             | 1800   | 730               | 124/128       |      |
| 7.50-16  | 16 | 18           | 6.00G | 215          | 816          | 1320             | 1500   |                   | 118/122       |      |
| 7.00-16  | 14 | 17           | 5.50F | 200          | 785          | 1180             | 1320   | 730               | 114/118       |      |
| 6.50-16  | 12 | 18           | 5.5   | 185          | 761          | 925              | 1060   | 630               | 105/110       |      |
| 6.50-15  | 10 | 18           | 4.50E | 180          | 742          | 825              | 950    | 530               | 101/106       |      |
| 6.00-15  | 10 | 13           | 4.50H | 170          | 717          | 730              | 825    | 530               | 97/101        |      |
| 6.00-14  | 10 | 13           | 4.50J | 170          | 691          | 710              | 800    | 530               | 96/100        | H988 |
| 6.00-13  | 8  | 13           | 4.50B | 170          | 666          | 580              | 650    | 420               | 89/93         |      |

## K2009 MINING KING TRUCK TIRE

Mining King adopt special formula design, deep tread pattern, big block.  
Has abrasion, cut-resistance, bomb-resistance, rockfall resistance, little  
resistance, and energy conservation performance, etc..  
Specially for mining aera, quarry, construction sites and other hard work  
condition zones.



| Size     | PR | T.D.<br>(mm) | S.R.  | S.W.<br>(mm) | O.D.<br>(mm) | Max Loading (kg) |        | Pressure<br>(kpa) | Load<br>Index | Code  |
|----------|----|--------------|-------|--------------|--------------|------------------|--------|-------------------|---------------|-------|
|          |    |              |       |              |              | Dual             | Single |                   |               |       |
| 12.00-20 | 20 | 32           | 8.5   | 315          | 1145         | 3450             | 4000   | 810/880           | 151/156       | K2009 |
| 11.00-20 | 18 | 30           | 8.0   | 293          | 1105         | 3150             | 3650   | 840/910           | 148/153       |       |
| 8.25-16  | 16 | 22           | 6.50H | 235          | 867          | 1600             | 1800   | 730               | 124/128       |       |
| 7.50-16  | 16 | 22           | 6.00G | 215          | 815          | 1320             | 1500   | 730               | 118/122       |       |
| 7.00-16  | 14 | 21           | 5.50F | 200          | 785          | 1180             | 1320   | 730               | 114/118       |       |

## H2009 MINING KING & INDUSTRIAL TIRE

For dump trucks on mining and logging service with super cutting  
resistance.



| Size     | PR | T.D.<br>(mm) | S.R. | S.W.<br>(mm) | O.D.<br>(mm) | Max Loading (kg) |        | Pressure<br>(kpa) | Load<br>Index | Code  |
|----------|----|--------------|------|--------------|--------------|------------------|--------|-------------------|---------------|-------|
|          |    |              |      |              |              | Dual             | Single |                   |               |       |
| 12.00-20 | 20 | 22           | 8.5  | 315          | 1145         | 3450             | 4000   | 810/800           | 151/156       | H2009 |
| 11.00-20 | 18 | 22           | 8.0  | 293          | 1105         | 3150             | 3650   | 840/910           | 148/153       |       |

## H2011 (SQ1) MINING STAR TRUCK TYRE

Deep directional design for excellent pulling power in forward and  
reverse direction.  
Heat resistance and abrasion resistance tread.  
Strong casing and higher load capacity



| Size     | PR | T.D.<br>(mm) | S.R.      | S.W.<br>(mm) | O.D.<br>(mm) | Max Loading (kg) |          | Pressure (kpa) |          | Type          | Code          |
|----------|----|--------------|-----------|--------------|--------------|------------------|----------|----------------|----------|---------------|---------------|
|          |    |              |           |              |              | @ 10km/h         | @ 50km/h | @ 10km/h       | @ 50km/h |               |               |
| 13.00-25 | 22 | 26           | 10.00/1.5 | 350          | 1350         | 8000             | 4250     | 825            | 550      | TT            | H2011<br>SQ-1 |
|          | 28 |              |           |              |              | 8900             | 5010     | 950            | 740      |               |               |
| Size     | PR | T.D.<br>(mm) | S.R.      | S.W.<br>(mm) | O.D.<br>(mm) | Max Loading (kg) |          | Pressure (kpa) | Type     | Code          |               |
|          |    |              |           |              |              | Dual             | Single   |                |          |               |               |
| 12.00-24 | 20 | 27           | 8.5       | 315          | 1250         | 4000             | 4500     | 810/880        | TT       | H2011<br>SQ-1 |               |
| 12.00-20 | 20 | 26           | 8.5       | 315          | 1145         | 3450             | 4000     | 810/880        |          |               |               |
| 11.00-20 | 18 | 25           | 8.0       | 295          | 1105         | 3150             | 3650     | 840/910        |          |               |               |
| 10.00-20 | 18 | 25           | 7.5       | 282          | 1073         | 2900             | 3350     | 840/910        |          |               |               |
| 9.00-20  | 16 | 21           | 7.0       | 268          | 1043         | 2500             | 2900     | 810/880        |          |               |               |
| 8.25-16  | 16 | 18           | 6.50H     | 235          | 865          | 1600             | 1800     | 730            |          |               |               |
| 7.50-16  | 16 | 18           | 6.00G     | 215          | 830          | 1320             | 1500     | 730            |          |               |               |



**MINING KING  
& INDUSTRIAL TIRE**



H2012

H2018

Specially designed pattern with extra deep tread and compound for long mileage.  
Widely reinforced tie bar with both center and shoulder part provides pattern strong property and durability.

| Size     | PR | T.D.<br>(mm) | S.R. | S.W.<br>(mm) | O.D.<br>(mm) | Max Loading (kg) |          | Pressure (kpa) |          | Type | Code           |
|----------|----|--------------|------|--------------|--------------|------------------|----------|----------------|----------|------|----------------|
|          |    |              |      |              |              | @10km/h          | @ 50km/h | @ 10km/h       | @ 50km/h |      |                |
| 10.00-20 | 18 | 30           | 7.5  | 278          | 1073         | --               | 3350     | --             | 910      | TT   | H2018          |
| 11.00-20 | 18 | 30           | 8.0  | 293          | 1105         | --               | 3650     | --             | 910      |      |                |
| 14.00-20 | 20 | 26           | 10.0 | 375          | 1315         | 7500             | 4375     | 700            | 525      |      |                |
|          | 28 |              |      |              |              | 9000             | 5135     | 800            | 700      |      |                |
| 14.00-24 | 28 | 32           | 10.0 | 375          | 1420         | 10000            | 5600     | 925            | 650      |      |                |
|          | 36 |              |      |              |              | 11000            | 6640     | 1050           | 740      |      |                |
|          | 40 |              |      |              |              | 11500            | 6900     | 1100           | 840      |      |                |
| 14.00-25 | 28 | 32           | 10.0 | 375          | 1420         | 10000            | 5600     | 925            | 650      |      | H2012<br>H2018 |
|          | 36 |              |      |              |              | 11000            | 6640     | 1050           | 740      |      |                |
|          | 40 |              |      |              |              | 11500            | 6900     | 1100           | 840      |      |                |

**TS1000** TIMBER STAR FORESTRY TYRE

For dump trucks on forestry logging service.  
Deeper tread pattern for powerful traction and longer lifespan



| Size     | PR | T.D.<br>(mm) | S.R. | S.W.<br>(mm) | O.D.<br>(mm) | Max Loading (kg) |        | Pressure<br>(kpa) | Speed<br>Index | Load<br>Index | Code   |
|----------|----|--------------|------|--------------|--------------|------------------|--------|-------------------|----------------|---------------|--------|
|          |    |              |      |              |              | Dual             | Single |                   |                |               |        |
| 12.00-24 | 20 | 39           | 8.5  | 315          | 1275         | 4000             | 4500   | 810/880           | B              | 156/160       | TS1000 |

Strong casing.  
Superior in heavy duty & puncture resistant.  
Excellent resistance to damage in harsh conditions.




| Size     | PR | T.D.<br>(mm) | S.R. | S.W.<br>(mm) | O.D.<br>(mm) | Max Loading (kg) |        | Pressure<br>(kpa) | Speed<br>Index | Load<br>Index | Code  |
|----------|----|--------------|------|--------------|--------------|------------------|--------|-------------------|----------------|---------------|-------|
|          |    |              |      |              |              | Dual             | Single |                   |                |               |       |
| 12.00-24 | 20 | 26           | 8.5  | 315          | 1250         | 4000             | 4500   | 810/880           | B              | 156/160       | ROCK- |

## NOTES:





# INDIAN PATTERNS TYRE



*Tire Direct*   
La nueva generación



## H139 SUPER RIB INDIAN PATTERN TIRE

Super heavy duty with special compound and strong carcass structure. Provides long mileage, powerful traction and great resistance to cut and chip.



| Size     | PR | T.D. (mm) | S.R.  | S.W. (mm) | O.D. (mm) | Max Loading (kg) |        | Pressure (kpa) |        | Code |
|----------|----|-----------|-------|-----------|-----------|------------------|--------|----------------|--------|------|
|          |    |           |       |           |           | Dual             | Single | Dual           | Single |      |
| 11.00-20 | 18 | 18.5      | 8.0   | 293       | 1105      | 3150             | 3650   | 840            | 910    | H139 |
| 10.00-20 | 18 | 18        | 7.5   | 285       | 1085      | 2900             | 3350   | 840            | 910    |      |
| 9.00-20  | 16 | 18        | 7.0   | 265       | 1045      | 2500             | 2900   | 810            | 880    |      |
| 8.25-20  | 16 | 16        | 6.5   | 235       | 980       | 2180             | 2430   | 840            | 910    |      |
| 7.50-16  | 16 | 15        | 6.00G | 215       | 823       | 1320             | 1500   | 730            | 730    |      |
| 7.00-16  | 14 | 13        | 5.50F | 200       | 785       | 1189             | 1320   | 730            | 730    |      |

## H225 MIX LUG INDIAN PATTERN TIRE

Super heavy duty with special compound. Strong extra deep tread ensure powerful traction and give economic efficiency.



| Size     | PR | T.D. (mm) | S.R.  | S.W. (mm) | O.D. (mm) | Max Loading (kg) |        | Pressure (kpa) |        | Code |
|----------|----|-----------|-------|-----------|-----------|------------------|--------|----------------|--------|------|
|          |    |           |       |           |           | Dual             | Single | Dual           | Single |      |
| 11.00-20 | 18 | 22.5      | 8.0   | 293       | 1105      | 3150             | 3650   | 840            | 910    | H225 |
| 10.00-20 | 18 | 22.5      | 7.5   | 283       | 1080      | 2900             | 3350   | 840            | 910    |      |
| 9.00-20  | 16 | 22        | 7.0   | 268       | 1045      | 2500             | 2900   | 810            | 880    |      |
| 7.50-16  | 16 | 18        | 6.00G | 215       | 825       | 1320             | 1500   | 730            | 730    |      |
| 7.00-16  | 14 | 5.5       | 5.50F | 202       | 785       | 1180             | 1320   | 730            | 730    |      |

## H322 MIX RIB (S-LUG) INDIAN PATTERN TIRE

Long mileage special with special tread compound and carcass structure. Ensure long mileage with low heat generation and long lasting hard tread.



| Size     | PR | T.D. (mm) | S.R.  | S.W. (mm) | O.D. (mm) | Max Loading (kg) |        | Pressure (kpa) |        | Code |
|----------|----|-----------|-------|-----------|-----------|------------------|--------|----------------|--------|------|
|          |    |           |       |           |           | Dual             | Single | Dual           | Single |      |
| 12.00-24 | 20 | 22.5      | 8.5   | 315       | 1245      | 4000             | 4500   | 810            | 880    | H322 |
| 11.00-20 | 18 | 22.5      | 8.0   | 293       | 1105      | 3150             | 3650   | 840            | 910    |      |
| 10.00-20 | 18 | 22.5      | 7.5   | 283       | 1080      | 2900             | 3350   | 840            | 910    |      |
| 8.25-20  | 16 | 20        | 6.5   | 236       | 992       | 2180             | 2430   | 840            | 910    |      |
| 8.25-16  | 16 | 19        | 6.50H | 235       | 867       | 1600             | 1800   | 730            | 730    |      |
| 7.50-16  | 16 | 18        | 6.00G | 215       | 825       | 1320             | 1500   | 730            | 730    |      |

## K2018 SUPER LUG INDIAN PATTERN TIRE

Pattern type with wide groove. provides outstanding driving comfort on both unpaved roads and muddy roads.



| Size     | PR | T.D. (mm) | S.R.  | S.W. (mm) | O.D. (mm) | Max Loading (kg) |        | Pressure (kpa) |        | Code  |
|----------|----|-----------|-------|-----------|-----------|------------------|--------|----------------|--------|-------|
|          |    |           |       |           |           | Dual             | Single | Dual           | Single |       |
| 11.00-20 | 18 | 22.5      | 8.0   | 293       | 1105      | 3150             | 3650   | 840            | 910    | K2018 |
| 10.00-20 | 18 | 22.5      | 7.5   | 283       | 1080      | 290              | 3350   | 840            | 910    |       |
| 7.50-16  | 16 | 22        | 6.00G | 215       | 816       | 1320             | 1500   | 730            | 730    |       |
| 7.00-16  | 14 | 21        | 5.50F | 200       | 785       | 1180             | 1320   | 730            | 730    |       |
| 6.50-16  | 12 | 18        | 5.50F | 185       | 761       | 925              | 1060   | 630            | 630    |       |
| 6.00-15  | 10 | 17.5      | 4.50E | 170       | 717       | 825              | 730    | 530            | 630    |       |
| 6.00-14  | 10 | 17        | 4.50J | 170       | 691       | 710              | 800    | 530            | 530    |       |
| 6.00-13  | 8  | 15        | 4.50B | 170       | 666       | 580              | 650    | 420            | 420    |       |





# TRUCK TYRE



*Tire Direct*   
La nueva generación



## H881 STD TRAILER TIRE

Strong manipulation.  
Tread design provides great traction, good handing stability and low resistance.



|   | Size        | PR | T.D.<br>(mm) | S.R. | S.W.<br>(mm) | O.D.<br>(mm) | Loading<br>(lbs) | Pressure<br>(psi) | Type | Code        |
|---|-------------|----|--------------|------|--------------|--------------|------------------|-------------------|------|-------------|
| ★ | ST175/80D13 | 6  | 6            | 5.0  | 177          | 610          | 1360             | 50                | TL   | H881<br>STD |
| ★ | ST185/80D13 | 6  | 6            | 5.0  | 184          | 626          | 1480             | 50                |      |             |
| ★ | ST185/80D13 | 8  | 6            | 5.0  | 184          | 626          | 1730             | 65                |      |             |
| ★ | ST205/75D14 | 6  | 6            | 5.5  | 203          | 664          | 1760             | 50                |      |             |
| ★ | ST215/75D14 | 6  | 6            | 5.5  | 210          | 678          | 1870             | 50                |      |             |
| ★ | ST205/75D15 | 6  | 6            | 5.5  | 200          | 689          | 1820             | 50                |      |             |
| ★ | ST225/75D15 | 8  | 6            | 6.0  | 210          | 719          | 2540             | 65                |      |             |

## H889-1 M/H MOBILE HOME TIRE

Using the latest super wear-resistant formula.  
Good puncture-resistance.  
High lateral skid prevention capability and longer life.



|   | Size        | PR | T.D.<br>(mm) | S.R. | S.W.<br>(mm) | O.D.<br>(mm) | Loading<br>(lbs) | Pressure<br>(psi) | Type | Code          |
|---|-------------|----|--------------|------|--------------|--------------|------------------|-------------------|------|---------------|
| ★ | 8-14.5      | 14 | 6.5          | 6.0  | 196          | 672          | 3100             | 115               | TL   | H889-1<br>M/H |
|   | 8-14.5      |    |              |      | 203          | 708          |                  |                   |      |               |
|   | 215/60D14.5 | 14 | 7            | 6.0  | 203          | 618          | 3100             | 110               |      |               |
|   | 235/60D14.5 | 14 | 9            | 7.0  | 224          | 673          | 3500             | 110               |      |               |

## H889-2 USA MARKET TRAILER TIRE

Using the latest super wear-resistant formula.  
Excellent anti-irregular wear performance and high mileage.



|  | Size        | PR | T.D.<br>(mm) | S.R.  | S.W.<br>(mm) | O.D.<br>(mm) | Loading<br>(lbs) | Pressure<br>(psi) | Type | Code   |
|--|-------------|----|--------------|-------|--------------|--------------|------------------|-------------------|------|--------|
|  | 7.50-16     | 10 | 6.5          | 6.00G | 215          | 805          | 2755             | 75                | TL   | H889-2 |
|  |             | 12 |              |       |              |              | 3085             | 90                |      |        |
|  | 7.00-15     | 8  | 6.5          | 5.50F | 200          | 750          | 1985             | 60                |      |        |
|  |             | 10 |              |       |              |              | 2270             | 75                |      |        |
|  | ST225/90D16 | 10 | 6.5          | 6.00G | 215          | 805          | 2755             | 75                |      |        |
|  |             | 12 |              |       |              |              | 3085             | 90                |      |        |
|  | ST205/90D15 | 8  | 6.5          | 5.50F | 200          | 750          | 1985             | 60                |      |        |
|  |             | 10 |              |       |              |              | 2270             | 75                |      |        |

## H889/H889\* TRAILER TIRE FOR PORT

Using the latest super wear-resistant formula.  
Excellent anti-irregular wear performance and high mileage.



H889

H889\*

|  | Size     | PR | T.D.<br>(mm) | S.R. | S.W.<br>(mm) | O.D.<br>(mm) | Loading<br>(lbs) | Pressure<br>(psi) | Type | Code  |
|--|----------|----|--------------|------|--------------|--------------|------------------|-------------------|------|-------|
|  | 10.00-20 | 14 | 10.5         | 7.5  | 278          | 1055         | 6170             | 100               | TT   | H889  |
|  |          | 16 |              |      |              |              | 6610             | 115               |      |       |
|  | 11-22.5  | 14 | 10.5         | 8.25 | 279          | 1054         | 6170             | 100               | TL   | H889* |
|  |          | 16 |              |      |              |              | 6610             | 115               |      |       |



## BI 1000 SUPER RIB LIGHT TRUCK TIRE

Suits for driving on highway and generally paved road.  
The unique pattern design and formula design, high quality raw material support.



| Size    | PR | T.D.<br>(mm) | S.R.  | S.W.<br>(mm) | O.D.<br>(mm) | Max Loading (kg) |        | Pressure (kpa) |        | Speed<br>Index | Load<br>Index | Code   |
|---------|----|--------------|-------|--------------|--------------|------------------|--------|----------------|--------|----------------|---------------|--------|
|         |    |              |       |              |              | Dual             | Single | Dual           | Single |                |               |        |
| 7.50-17 | 10 | 12           | 5.00F | 212          | 843          | 1260             | 1440   | 550            | 620    | L              | 116/121       | BI1000 |
| 7.50-16 | 10 | 10.5         | 6.00G | 210          | 805          | 1120             | 1250   | 530            | 530    | K              | 112/116       |        |
| 7.00-15 | 10 | 9.5          | 5.50F | 200          | 750          | 925              | 1030   | 530            | 530    | K              | 105/109       |        |

## H889 RIB TRUCK TIRE

Developed for trucks and buses. Features heat resistant tread.  
Required to travel continuously at high speeds on highways.



| Size     | PR | T.D.<br>(mm) | S.R.  | S.W.<br>(mm) | O.D.<br>(mm) | Max Loading (kg) |        | Pressure (kpa) |        | Load<br>Index | Code        |
|----------|----|--------------|-------|--------------|--------------|------------------|--------|----------------|--------|---------------|-------------|
|          |    |              |       |              |              | Dual             | Single | Dual           | Single |               |             |
| 11.00-20 | 18 | 16           | 8.0   | 293          | 1085         | 3150             | 3650   | 840            | 910    | 148/153       | H889<br>RIB |
| 10.00-20 | 18 | 14           | 7.5   | 278          | 1055         | 2900             | 3350   | 810            | 880    | 145/150       |             |
| 9.00-20  | 16 | 14           | 7.5   | 259          | 1018         | 2500             | 2900   |                |        | 140/145       |             |
| 9.00-16  | 16 | 16           | 6.50H | 255          | 890          | 1720             | 1955   | 730            |        | 129/134       |             |
| 8.25-16  | 16 | 14           | 6.50H | 235          | 855          | 1600             | 1800   |                |        | 124/128       |             |
| 7.50-16  | 14 | 12           | 6.00G | 215          | 805          | 1320             | 1500   |                |        | 118/122       |             |
| 7.00-16  | 14 | 11           | 5.50F | 200          | 775          | 1180             | 1320   |                |        | 114/118       |             |
| 6.50-16  | 12 | 10           | 5.50F | 185          | 750          | 925              | 1060   | 630            |        | 105/110       |             |
| 7.00-15  | 12 | 11           | 5.50F | 200          | 750          | 1030             | 1150   |                |        | 109/113       |             |
| 6.50-15  | 10 | 10           | 4.50E | 180          | 730          | 825              | 950    | 530            |        | 101/106       |             |
| 6.50-14  | 10 | 10           | 4.50J | 180          | 705          | 800              | 900    |                |        | 100/104       |             |
| 6.00-15  | 10 | 11.5         | 4.50E | 170          | 705          | 730              | 825    |                |        | 97/101        |             |
| 6.00-14  | 10 | 11.5         | 4.50J | 170          | 680          | 710              | 800    |                |        | 96/100        |             |
| 6.00-13  | 8  | 11.5         | 4.50J | 170          | 655          | 580              | 650    | 420            |        | 89/93         |             |

## H999 LUG TRUCK TIRE

The most popular lug tread design for all types of vehicles on both paved and unpaved roads.



| Size     | PR | T.D.<br>(mm) | S.R.  | S.W.<br>(mm) | O.D.<br>(mm) | Max Loading (kg) |        | Pressure (kpa) |        | Load<br>Index | Code        |
|----------|----|--------------|-------|--------------|--------------|------------------|--------|----------------|--------|---------------|-------------|
|          |    |              |       |              |              | Dual             | Single | Dual           | Single |               |             |
| 12.00-20 | 20 | 18           | 8.5   | 315          | 1125         | 3450             | 4000   | 810            | 880    | 151/156       | H999<br>LUG |
| 11.00-20 | 18 | 16           | 8.0   | 293          | 1085         | 3150             | 3650   | 840            | 910    | 148/153       |             |
| 10.00-20 | 18 | 15           | 7.5   | 278          | 1055         | 2900             | 3350   | 810            | 880    | 145/150       |             |
| 9.00-20  | 16 | 15           | 7.5   | 259          | 1018         | 2255             | 2575   |                |        | 140/145       |             |
| 8.25-20  | 16 | 14           | 6.5   | 235          | 974          | 2180             | 2460   | 840            | 910    | 135/139       |             |
| 7.50-20  | 14 | 14           | 6.0   | 215          | 935          | 1655             | 1885   | 740            | 810    | 126/130       |             |
| 7.00-20  | 14 | 12           | 5.5   | 200          | 904          | 1550             | 1750   | 770            | 840    | 123/127       |             |
| 9.00-16  | 16 | 16           | 6.50H | 255          | 890          | 1850             | 2120   | 730            |        | 129/134       |             |
| 8.25-16  | 16 | 14           | 6.50H | 235          | 855          | 1600             | 1800   |                |        | 124/128       |             |
| 7.50-16  | 14 | 11           | 6.00G | 215          | 805          | 1320             | 1500   |                |        | 118/122       |             |
| 7.00-16  | 14 | 11           | 5.50F | 200          | 775          | 1180             | 1320   |                |        | 114/118       |             |
| 6.50-16  | 12 | 10           | 5.50F | 185          | 750          | 925              | 1060   | 630            |        | 105/110       |             |
| 7.00-15  | 12 | 11           | 5.50F | 200          | 750          | 1030             | 1150   |                |        | 109/113       |             |
| 6.50-15  | 10 | 10           | 4.50E | 180          | 730          | 825              | 950    | 530            |        | 101/106       |             |
| 6.00-15  | 10 | 11.5         | 4.50E | 170          | 705          | 730              | 825    |                |        | 97/101        |             |
| 6.00-14  | 10 | 11.5         | 4.50J | 170          | 680          | 710              | 800    |                |        | 96/100        |             |
| 6.00-13  | 8  | 11.5         | 4.50J | 170          | 655          | 580              | 650    | 420            |        | 89/93         |             |