

LÍNEA DE PRODUCTOS ST

(TRAILER ESPECIAL)



BLACKHAWK **GRANDSTONE**



ST SINGLE

16 X 6 K

4020 LBS

8 VENTILAS
10 VENTILAS



BLANCO



PLATEADO



NEGRO

ST SINGLE

15 X 5 J

1870 LBS

8 VENTILAS



BLANCO



NEGRO

ST SINGLE

8x3.75 1075 LBS



8x5.375 1075 LBS




8x7 1075 LBS



13x4.5 1660 LBS 8V



17.5x6.75 S 6005 LBS

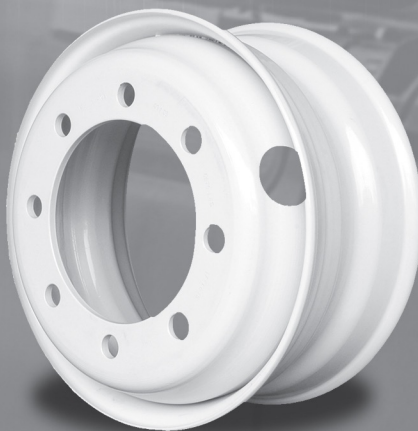

17.5x6.75 D 6200 LBS





Special Trailer

1. Recommended for Trailer applications.
2. Variable angled tread pattern reduces stone retention.
3. Strong carcass materials help promote tire durability.
4. All steel radial tire.

F835

Size	Load Index &Speed symbols	PR	Load Range	Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Overall Width (in)	Tread Depth (32nds)
					Dual		Single				
					lbs	psi	lbs	psi			
ST235/85R16	132/127M	14	G	6 1/2J	3860	110	4400	110	31.34	9.25	11.2
ST235/80R16	129/125M	14	G	6.50	3640	110	4080	110	30.79	9.25	11.2
ST245/75R16	123/119M	10	E	7.00	3000	80	3420	80	30.47	9.76	14.0



Trailer Tire

1. Ultra-wide tread design Increase the contact area with the ground and avoid the eccentric wear.
2. Popular size design Most popular size in USA market.
3. Big pattern design big pattern design guarantee the High performance on the bad road condition.
4. Economical tvre Lower weight with low cost.

AT R781

Size	Ply Rating	Load Index & Speed Symbols	Standard Rim	Standard Load	Inflated Pressure	Overall Diameter (in)	Overall Width (in)	Tread Depth (32nds)
				lbs	psi			
ST175/80R13	6PR	91/87M	5J	1360/1200	50	24.02	6.97	7.94
ST205/75R14	6PR	100/96M	5.5J	1760/1570	50	26.14	7.99	7.94
ST215/75R14	6PR	102/98M	6J	1870/1650	50	27.13	7.99	7.94
ST205/75R15	6PR	101/97M	5.5J	1820/1610	50	27.13	7.99	7.94
ST205/75R15	8PR	107/102M	5.5J	2150/1870	65	26.69	8.50	7.94
ST225/75R15	8PR	113/108M	6J	2540/2200	65	28.31	8.78	7.94
ST225/75R15	10PR	117/112M	6J	2830/2470	80	28.31	8.78	7.94
ST235/80R16	10PR	123/119M	6.5J	3420/3000	80	30.79	9.25	7.94
ST235/85R16	10PR	125/121M	6.5J	3640/3200	80	31.73	9.25	7.94

BLACKHAWK

Tire Direct

La nueva generación



HST01 HISCEND-H

Shoulder Design

The unique no-joint shoulder design helps reduce deformation of the belt and reduces heat buildup in the shoulder.

	SIZE	PR	LI	SR	XL OR NOT	SIDEWALL	T.D	STANDARD RIM	S.W	O.D (mm)	UTQG	MAX LOAD (kg)	PRESSURE (kpa)	PLANT
13	ST175/80R13	6PR	91/87	L	--	BSW	7.6	5J	177	610	--	615/545	350	CP
14	ST205/75R14	6PR	100/96	L	--	BSW	7.8	5 1/2J	203	664	--	800/710	350	CP
	ST215/75R14	6PR	102/98	L	--	BSW	7.8	6J	216	678	--	850/750	350	CP
15	ST205/75R15	8PR	107/102	L	--	BSW	7.8	5 1/2J	203	689	--	975/850	450	CP
	LT225/75R15	6PR	102/99	S	--	OWL	12.0	6J	223	719	--	850/775	350	CP
	ST225/75R15	10PR	117/112	L	--	BSW	7.8	6J	223	719	--	1285/1120	550	CP
16	ST235/80R16	10PR	124/120	L	--	BSW	8.0	6 1/2J	235	782	--	1600/1400	550	CP
	ST235/85R16	10PR	125/121	L	--	BSW	8.0	6 1/2J	235	806	--	1650/1450	550	CP
	ST235/85R16	12PR	128/124	L	--	BSW	8.0	6 1/2J	235	806	--	1800/1600	660	CP



Stone Retention

The zigzag design of the tread grooves reduces stone retention and improves overall driving adaptability on all road conditions.



Rib Design

Overall tread rigidity is improved to reduce tire deformation and reduce heat build-up.



Tread Life

The groove and sipe design improves tire traction and resistance to heat buildup to effectively extend tire tread life.



SNOW GRIP



HIGH DURABILITY



LONG MILEAGE

Special trailer-hauling design with great performance.



ST100

SIZE	SUBTIPO	MINICODIGO	PLY RATING	TYPE	PATTERN	STANDAR RIM	LOAD INDEX AND SPEED RATING	WEIGHT (KG)	Qty/ 40HQ
ST175/80R13	ST	STST175/80R13	6PR C	TL	ST100	5.00B	91/87 M	7.27	1700
ST205/75R14	ST	STST205/75R14	6PR C	TL	ST100	5 1/2J	100/96 M	9.75	1200
ST205/75R15	ST	STST205/75R15	8PR D	TL	ST100	5 1/2J	107/102 M	10.80	1120
ST225/75R15	ST	STST225/75R15	10PR E	TL	ST100	6J	117/112 M	12.88	930
ST235/80R16	ST	STST235/80R16	10PR E	TL	ST100	6 1/2J	124/120 M	15.00	770



DK688

MEDIDA	CAPAS	LI/SI	STANDAR RIM	ANCHO DE SECCIÓN	DIÁMETRO TOTAL	CAPACIDAD MÁXIMA DE CARGA		MÁXIMA PRESIÓN	
				MM	MM	KG	LBS	KPA	PSI
ST175/80R13	6 PR	91 L	5.00 JB	177	610	615	1360	350	50
ST205/75R14	6 PR	100/66 L	5.5 J	203	664	800/710	1760/1570	350	50
ST205/75R15	8 PR	107/102 L	5 ½ J	203	689	975/850	2149/1870	450	65
ST225/75R15	8 PR	113/108 L	6 J	223	719	1150/1000	2540/2205	450	65
ST235/80R16	10 PR	124/119 L	6 ½ J	235	782	1500/1360	3524/2998	550	80
ST235/85R16	10 PR	125/121 L	6.5 J	235	806	1650/1450	3640/3200	550	80



Tire Direct
La nueva generación



LRP228

MEDIDA	CAPAS	STANDAR RIM	CAPACIDAD DE CARGA	PROFUNDIDAD DE PISO (MM)
ST175/80R13	6PR	5.00B	91/87 M	6.5
ST205/75R14	6PR	5 1/2J	100/96 M	6.5
ST205/75R15	6PR	5 1/2J	101/97 M	6.5
ST225/75R15	6PR	6J	113/108 M	6.5
ST235/80R16	6PR	6 1/2J	124/120 M	6.5



LANDY TIRE

Tire Direct
La nueva generación



DA802

SIZE	PR	LOAD INDEX		SPEED SYMBOL	STANDARD RIM	APPLICABLE RIM	MAX LOAD (KG)		PRESSURE (kpa)		OVERALL DM (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)
		SINGLE	DUAL				SINGLE	DUAL	SINGLE	DUAL			
ST235/80R16	14	129	125	L	6 1/2 J	6J, 6 1/2 J, 7J/2J	1850	1650	760	760	782	235	105
ST235/85R16	14	126	123	L	6 1/2 J	6J, 6 1/2 J, 7J, 7 1/2 J	1700	1550	760	760	806	235	105



SPECIALITY TRAILER RADIAL LOAD WARRIOR

SIZE	PR	LOAD INDEX	SPEED INDEX	RIM INCH	S.W. INCH	OVERALL DM (Inch)	MAX. PRESSURE (psi)	MAX. LOAD Lbs.
ST175/80R13	6	91/87	L	5	7.0	24.0	50	1360
ST205/75R14	8	105/101	M	5.5	8.0	26.1	65	2040
ST205/75R15	8	107/102	N	5.5	8.2	27.0	65	2150
ST225/75R15	10	117/112	N	6	8.8	28.3	80	2830
ST235/80R16	10	124/120	N	6.5	9.3	30.8	80	3520
ST235/85R16	14	132/127	L	6.5	9.3	31.7	109	4409



HD285

SIZE	LOAD INDEX PR	SPEED INDEX	RIM INCH	S.W. MM	OVERALL DM (mm)	At Cold		MAX. LOAD
						kPa	kgf/cm2	Lbs.
ST175/80R13-C	91/87	L	5.00B	177	610	615	545	350
ST205/75R14-C	100/96	L	5.5J	203	664	800	710	350
ST205/75R15-D	107/102	L	5.5J	203	689	975	850	450
ST215/75R14-C	102/98	L	6J	216	678	850	750	350
ST225/75R15-E	117/112	L	6J	223	719	1285	1120	550
ST235/80R16-E	124/120	L	6.5J	235	782	1600	1400	550
ST235/85R16-E	125/121	L	6.5J	235	806	1650	1450	550

Tire Direct

La nueva generación



Bld. Campestre No. 72
Col. Casa Blanca, León, Gto.
C.P. 37170



+52 (477) 718.09.21
01800 000TIRE (8473)



info@tiredirect.com.mx
www.tiredirect.com.mx



Tire Direct



Tire Direct



BLACKHAWK

GRANDSTONE®



www.tiredirect.com.mx