

WINRUN®

600 **600+**
TYRE SIZES AVAILABLE

Tire Direct
La nueva generación



TIRE DIRECT



/TIRE_DIRECT



/TIREDIRECTMX



TIRE DIRECT

WINRUN®

WINRUN[®]

B L A Z E N E W T R A I L S





2008
WINRUN CHINA



2017
WINRUN GERMANY



2018
WINRUN THAILAND



2025
WINRUN USA

GO HARD
OR
GO HOME



GERMANY

MADE IN GERMANY



R330+

German origin tyres




German W-Silent Technology



German W-Silent Technology with sound-absorbing sponge can significantly reduce the noise generated by the resonance from the tyre inner cavity.


German W-Silent Technology with sponge only increases the weight of each tyre by about 200g~350g (235/40R19).

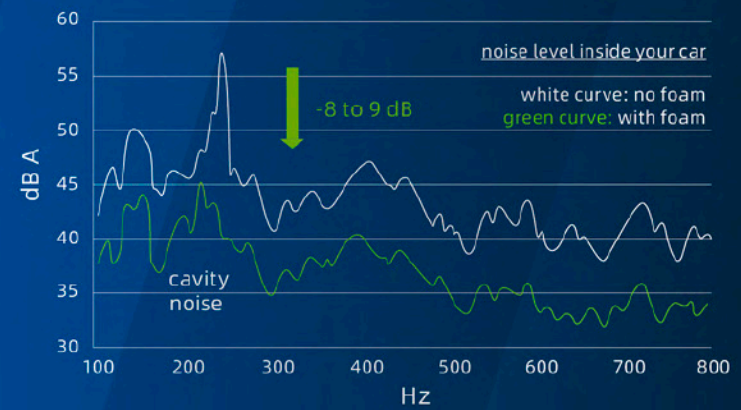

German W-Silent Technology can effectively reduce the noise generated by resonance of the tyre cavity. It can reduce the noise by up to 8-9 dB at the frequency range of 200-250Hz, and around 1-5 dB lower under other frequency ranges.



Winrun Tyre Safety Technology

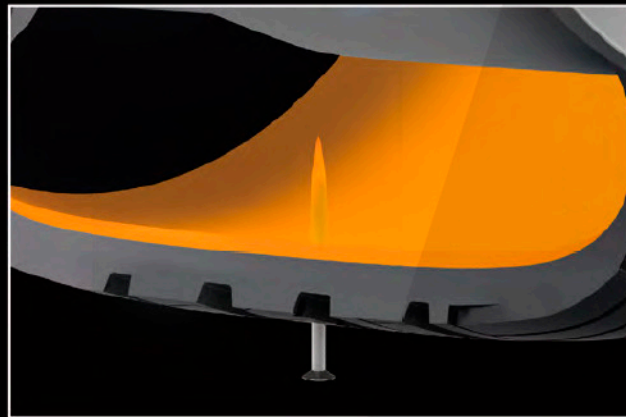


WORRY NO MORE FOR PUNCTURES, STAY IN MOTION

In the event of the tyre is punctured, the built-in nano-intelligent sealant immediately fills the void and wraps it to prevent possible air leakage and maintain pressure, which allows you to continue driving.

Nano-intelligent Protection, Maintain Tire Performances

The built-in nano-intelligent material protective layer has no impact on tyre rolling resistance, it maintains all other tire performances.

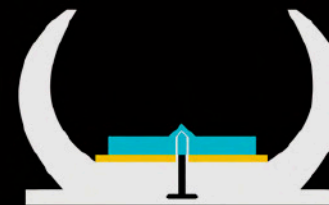

No repairs, No Worries

Winrun Intelligent Protection Technology. Maintain tyres air pressure in the event of a nail puncture, even if the nail has been removed. It can repeatedly self-seal the same perforation for multiple times, no further repair needed.



R330+



Excellent driving experience on wet and dry roads with perfect handling



	INCH	SERIES	SIZE	LI/SI	TREAD DEPTH (mm)	STANDARD RIM	UTQG	
UHP								
18	60	* 235/60R18	107V XL	8.0	7.0J	420 AA A		
	55	* 225/55R18	98V	8.0	7.0J	420 AA A		
	55	255/55R18	109V XL	8.0	8.0J	420 AA A		
	50	* 235/50R18	97W	8.0	7.5J	420 AA A		
	50	245/50R18	104W XL	8.0	7.5J	420 AA A		
	45	* 225/45R18	95W XL	8.0	7.5J	420 AA A		
	45	245/45R18	100W XL	8.0	8J	420 AA A		
	45	255/45R18	103W XL	8.0	8.5J	420 AA A		
	40	* 225/40R18	92W XL	8.0	8J	420 AA A		
	40	245/40R18	97W XL	8.0	8.5J	420 AA A		
	40	255/40R18	99W XL	8.0	9J	420 AA A		
	19	55	235/55R19	101W	8.0	7.5J	420 AA A	
55		* 245/55R19	103W	8.0	7.5J	420 AA A		
55		* 255/55R19	111W XL	8.0	8J	420 AA A		
50		* 235/50R19	103W XL	8.0	7.5J	420 AA A		
50		255/50R19	107W XL	8.0	8J	420 AA A		
50		265/50R19	110W XL	8.0	8.5J	420 AA A		
45		245/45R19	102W XL	8.0	8J	420 AA A		
45		255/45R19	104W XL	8.0	8.5J	420 AA A		
40		* 235/40R19	96W XL	8.0	8.5J	420 AA A		
40		245/40R19	98W XL	8.0	8.5J	420 AA A		
40		255/40R19	100W XL	8.0	9J	420 AA A		
20		40	275/40R19	105W XL	8.0	9.5J	420 AA A	
	35	* 255/35R19	96W XL	8.0	9J	420 AA A		
	35	* 265/35R19	98W XL	8.0	9.5J	420 AA A		
	35	275/35R19	100W XL	8.0	9.5J	420 AA A		
	55	* 235/55R20	105W XL	8.0	7.5J	420 AA A		
	55	* 255/55R20	110W XL	8.0	8J	420 AA A		
	50	* 255/50R20	109W XL	8.0	8J	420 AA A		
	50	* 275/50R20	113W XL	8.0	8.5J	420 AA A		
	45	245/45R20	103W XL	8.0	9J	420 AA A		
	45	255/45R20	105W XL	8.0	8.5J	420 AA A		
	45	* 265/45R20	108W XL	8.0	9J	420 AA A		
	20	45	275/45R20	110W XL	8.0	9J	420 AA A	
45		* 285/45R20	112W XL	8.0	9.5J	420 AA A		
RUNFLAT								
18		55	* 255/55RF18	109H XL	8.0	8J	420 AA A	
		50	* 225/50RF18	95W	8.0	7J	420 AA A	
		50	* 245/50RF18	100V	8.0	7.5J	420 AA A	
		45	* 225/45RF18	91W	8.0	7.5J	420 AA A	
		45	* 245/45RF18	96W	8.0	8J	420 AA A	
		40	* 225/40RF18	88W	8.0	8J	420 AA A	
		40	* 245/40RF18	93W	8.0	8.5J	420 AA A	
		40	* 255/40RF18	95W	8.0	9J	420 AA A	
		40	* 275/40RF18	99W	8.0	9.5J	420 AA A	
	35	* 255/35RF18	90W	8.0	9J	420 AA A		
	19	55	* 235/55RF19	101W	8.0	7.5J	420 AA A	
		50	* 255/50RF19	103V	8.0	8J	420 AA A	
45		* 245/45RF19	98W	8.0	8J	420 AA A		
40		* 225/40RF19	89W	8.0	8J	420 AA A		
40		* 245/40RF19	94W	8.0	8.5J	420 AA A		
40		* 275/40RF19	101W	8.0	9.5J	420 AA A		
35		* 275/35RF19	96W	8.0	9J	420 AA A		
20		40	* 245/40RF20	95W	8.0	8.5J	420 AA A	
		40	* 275/40RF20	102W	8.0	9.5J	420 AA A	
		35	* 275/35RF20	98W	8.0	9.5J	420 AA A	
		35	* 315/35RF20	106W	8.0	11J	420 AA A	

* Available in 2022/2023

X. Extra Load



R380



- Asymmetric PCR pattern
- Advanced silica compound
- Anti-skidding design for main grooves
- Improve braking distance and reduce driving noise
- Excellent performance in wet & dry handling



INCH	SERIES	SIZE	LI/SI	TREAD DEPTH (mm)	STANDARD RIM	UTQG
13	80	155/80R13	79T	7.2	4.5J	420 A A
	70	* 145/70R13	71T	7.2	4.5J	420 A A
	70	155/70R13	77T	7.2	4.5J	420 A A
	70	165/70R13	79T	7.2	5J	420 A A
	70	175/70R13	82T	7.2	5J	420 A A
	70	185/70R13	86T	7.2	5.5J	420 A A
	65	* 155/65R13	73T	7.2	4.5J	420 A A
	65	165/65R13	77T	7.2	5J	420 A A
14	60	175/60R13	77H	7.2	5J	420 A A
	70	* 155/70R14	72T	7.2	4.5J	420 A A
	70	165/70R14	81T	7.2	5J	420 A A
	70	165/70R14	85T XL	7.2	5J	420 A A
	70	175/70R14	84T	7.2	5J	420 A A
	70	175/70R14	88T XL	7.2	5J	420 A A
	70	185/70R14	88T	7.2	5.5J	420 A A
	70	195/70R14	91T	7.2	6J	420 A A
	65	155/65R14	75T	7.2	4.5J	420 A A
	65	165/65R14	79T	7.2	5J	420 A A
	65	165/65R14	83T XL	7.2	5J	420 A A
	65	175/65R14	82T	7.2	5J	420 A A
	65	175/65R14	86T XL	7.2	5J	420 A A
	65	185/65R14	86T	7.2	5.5J	420 A A
	65	185/65R14	86H	7.2	5.5J	420 A A
	60	165/60R14	75H	7.2	5J	420 A A
60	185/60R14	82H	7.2	5.5J	420 A A	
60	205/60R14	88H	7.2	6J	420 A A	
55	185/55R14	80H	7.2	6J	420 A A	
15	70	205/70R15	96H	7.5	6J	420 A A
	65	* 165/65R15	81H	7.2	5J	420 A A
	65	175/65R15	84H	7.2	5J	420 A A
	65	185/65R15	88H	7.2	5J	420 A A
	65	195/65R15	91H	7.5	6J	420 A A
	65	195/65R15	91V	7.5	6J	420 A A
	65	195/65R15	95T XL	7.5	6J	420 A A
	65	205/65R15	94H	7.5	6J	420 A A
	65	205/65R15	94V	7.5	6J	420 A A
	65	* 215/65R15	96H	7.5	6.5J	420 A A
	65	* 215/65R15	100H XL	7.5	6.5J	420 A A
	60	175/60R15	81H	7.2	5J	420 A A
	60	185/60R15	84H	7.2	5.5J	420 A A
	60	185/60R15	88H XL	7.2	5.5J	420 A A
60	195/60R15	88V	7.5	6J	420 A A	
60	205/60R15	91V	7.5	6J	420 A A	
16	65	205/65R16	95H	7.5	6J	420 A A
	65	215/65R16	98H	7.5	6.5J	420 A A
	60	195/60R16	89H	7.5	6J	420 A A
	60	205/60R16	92H	7.5	6J	420 A A
	60	205/60R16	96V XL	7.5	6J	420 A A
	60	215/60R16	95H	7.5	6.5J	420 A A
	60	215/60R16	99V XL	7.5	6.5J	420 A A
	60	225/60R16	98H	7.5	6.5J	420 A A
17	60	215/60R17	96V	7.5	6.5J	420 A A
	60	225/60R17	99V	7.5	6.5J	420 A A
	60	235/60R17	102H	8.0	7J	420 A A
18	60	225/60R18	104V XL	8.0	6.5J	420 A A
	60	235/60R18	107V XL	8.0	7J	420 A A

* Available in 2022/2023 XL Extra Load

R330



- Asymmetric UHP pattern
- Advanced silica compound
- Anti-skidding design for main grooves
- Improve braking distance and reduce driving noise
- Excellent performance in wet & dry handling



INCH	SERIES	SIZE	LI/SI	TREAD DEPTH (mm)	STANDARD RIM	UTQG	
14	55	165/55R14	72H	7.5	5J	420 A A	
	15	55	165/55R15	75H	7.5	5J	420 A A
15	55	* 175/55R15	77V	7.5	5.5J	420 A A	
	55	185/55R15	82V	7.5	6J	420 A A	
	55	195/55R15	85V	7.5	6J	420 A A	
	50	165/50R15	76V XL	7.5	5J	420 A A	
	50	195/50R15	82V	7.5	6J	420 A A	
	50	205/50R15	86V	7.5	6.5J	420 A A	
	45	195/45R15	78V	7.5	6.5J	420 A A	
	16	55	185/55R16	83H	7.5	6J	420 A A
		55	195/55R16	87V	7.5	6J	420 A A
		55	205/55R16	91V	7.5	6.5J	420 A A
55		205/55ZR16	91W	7.5	6.5J	420 A A	
55		205/55ZR16	94W XL	7.5	6.5J	420 A A	
55		215/55ZR16	97W XL	7.5	7J	420 A A	
55		225/55ZR16	95W	7.5	7J	420 A A	
55		225/55ZR16	99W XL	7.5	7J	420 A A	
50		165/50R16	77V XL	7.5	5J	420 A A	
50		* 185/50R16	81V	7.5	6J	420 A A	
50		195/50R16	88V XL	7.5	6J	420 A A	
50		205/50ZR16	87W	7.5	6.5J	420 A A	
50		225/50R16	92V	7.5	7J	420 A A	
50		225/50ZR16	96W XL	7.5	7J	420 A A	
17		45	165/45R16	74V XL	7.5	5.5J	420 A A
	45	195/45R16	84V XL	7.5	6.5J	420 A A	
	45	205/45ZR16	87W XL	7.5	7J	420 A A	
	45	* 215/45R16	90V XL	7.5	7J	420 A A	
	55	205/55ZR17	95W XL	7.5	6.5J	420 A A	
	55	215/55ZR17	98W XL	7.5	7J	420 A A	
	55	225/55ZR17	101W XL	7.5	7J	420 A A	
	55	235/55ZR17	103W XL	7.5	7.5J	420 A A	
	50	205/50ZR17	93W XL	7.5	6.5J	420 A A	
	50	215/50ZR17	95W XL	7.5	7J	420 A A	
	50	225/50ZR17	98W XL	7.5	7J	420 A A	
	50	235/50ZR17	100W XL	7.5	7J	420 A A	
	45	195/45ZR17	85W XL	7.5	6.5J	420 A A	
	45	205/45ZR17	88W XL	7.5	7J	420 A A	
	45	215/45ZR17	91W XL	7.5	7J	420 A A	
	45	225/45ZR17	94W XL	7.5	7.5J	420 A A	
	45	235/45ZR17	97W XL	7.5	8J	420 A A	
	45	245/45ZR17	95W	7.5	8J	420 A A	
	45	255/45ZR17	102W XL	7.5	8.5J	420 A A	
	18	40	195/40ZR17	81W XL	7.5	7J	420 A A
40		205/40ZR17	84W XL	7.5	7.5J	420 A A	
40		215/40ZR17	87W XL	7.5	7.5J	420 A A	
40		245/40ZR17	91W	7.5	8.5J	420 A A	
40		245/40ZR17	95W XL	7.5	8.5J	420 A A	
40		255/40ZR17	94W	7.5	9J	420 A A	
55		215/55R18	95V	7.5	7J	420 A A	
55		225/55R18	98V	7.5	7J	420 A A	
55		235/55R18	104V XL	8.0	7.5J	420 A A	
50		* 215/50ZR18	96W XL	7.5	7J	420 A A	
50		225/50ZR18	95W	7.5	7J	420 A A	
50		235/50ZR18	101W XL	7.5	7J	420 A A	
18	50	245/50ZR18	104W XL	7.5	7.5J	420 A A	
	45	* 205/45ZR18	90W XL	7.5	7J	420 A A	
	45	215/45ZR18	93W XL	7.5	7J	420 A A	
	45	225/45ZR18	95W XL	7.5	7.5J	420 A A	
	45	235/45ZR18	98W XL	7.5	8J	420 A A	
	45	245/45ZR18	100W XL	7.5	8J	420 A A	

INCH	SERIES	SIZE	LI/SI	TREAD DEPTH (mm)	STANDARD RIM	UTQG	
18	45	255/45ZR18	103W XL	7.5	8.5J	420 A A	
	45	275/45ZR18	107W XL	7.5	9J	420 A A	
	40	215/40ZR18	89W XL	7.5	7.5J	420 A A	
	40	225/40ZR18	92W XL	7.5	8J	420 A A	
	40	235/40ZR18	95W XL	7.5	8.5J	420 A A	
	40	245/40ZR18	97W XL	7.5	8.5J	420 A A	
	40	255/40ZR18	99W XL	7.5	9J	420 A A	
	40	*265/40ZR18	101W XL	7.5	9.5J	420 A A	
	40	275/40ZR18	103W XL	7.5	9.5J	420 A A	
	35	215/35ZR18	84W XL	7.5	7.5J	420 A A	
	35	*245/35ZR18	92W XL	7.5	8.5J	420 A A	
	35	255/35ZR18	94W XL	7.5	9J	420 A A	
	35	265/35ZR18	97W XL	7.5	9.5J	420 A A	
	35	275/35ZR18	99W XL	7.5	9.5J	420 A A	
	35	*285/35ZR18	101W XL	7.5	10J	420 A A	
	19	55	225/55R19	99V	8.0	7J	420 A A
		55	235/55ZR19	101W	8.0	7.5J	420 A A
		55	255/55ZR19	111W XL	8.0	8J	420 A A
55		275/55ZR19	111W	8.0	8.5J	420 A A	
50		235/50ZR19	103W XL	7.5	7.5J	421 A A	
50		255/50ZR19	107W XL	8.0	8J	420 A A	
50		265/50ZR19	110W XL	8.0	8.5J	420 A A	
45		225/45ZR19	96W XL	7.5	7.5J	420 A A	
45		235/45ZR19	99W XL	7.5	8J	420 A A	
45		245/45ZR19	102W XL	7.5	8J	420 A A	
45		255/45ZR19	104W XL	7.5	8.5J	420 A A	
45		*275/45ZR19	108W XL	8.0	9J	420 A A	
45		*285/45ZR19	111W XL	8.0	9.5J	420 A A	
40		225/40ZR19	93W XL	7.5	8J	420 A A	
40		235/40ZR19	96W XL	7.5	8.5J	420 A A	
40		245/40ZR19	98W XL	7.5	8.5J	420 A A	
40		255/40ZR19	100W XL	7.5	9J	420 A A	
40		*265/40ZR19	102W XL	7.5	9.5J	420 A A	
40		275/40ZR19	105W XL	7.5	9.5J	420 A A	
40		*285/40ZR19	107W XL	7.5	10J	420 A A	
35		215/35ZR19	85W XL	7.5	7.5J	420 A A	
35		225/35ZR19	88W XL	7.5	8J	420 A A	
35		235/35ZR19	91W XL	7.5	8.5J	420 A A	
35		245/35ZR19	93W XL	7.5	8.5J	420 A A	
35		255/35ZR19	96W XL	7.5	9J	420 A A	
35		265/35ZR19	98W XL	7.5	9.5J	420 A A	
35		275/35ZR19	100W XL	7.5	9.5J	420 A A	
35		*285/35ZR19	103W XL	7.5	10J	420 A A	
35		*295/35ZR19	104W XL	7.5	10.5J	420 A A	
30		255/30ZR19	91W XL	7.5	9J	420 A A	
30	265/30ZR19	93W XL	7.5	9.5J	420 A A		
30	275/30ZR19	96W XL	7.5	9.5J	420 A A		
30	*285/30ZR19	98W XL	7.5	10J	420 A A		
30	295/30ZR19	100W XL	7.5	10.5J	420 A A		
30	305/30ZR19	102W XL	7.5	11J	420 A A		
20	50	235/50ZR20	105W XL	8.0	7.5J	420 A A	
	50	245/50R20	102V	8.0	7.5J	420 A A	
	50	255/50ZR20	109W XL	8.0	8J	420 A A	
	50	275/50ZR20	113W XL	8.0	8.5J	420 A A	
	45	*235/45ZR20	100W XL	7.5	8J	420 A A	
	45	245/45ZR20	103W XL	7.5	9J	420 A A	
	45	255/45ZR20	105W XL	7.5	8.5J	420 A A	
	45	265/45ZR20	108W XL	8.0	9J	420 A A	
	45	275/45ZR20	110W XL	8.0	9J	420 A A	
	45	285/45ZR20	112W XL	8.0	9.5J	420 A A	
	40	245/40ZR20	99W XL	7.5	8.5J	420 A A	
	40	255/40ZR20	101W XL	7.5	9J	420 A A	

INCH	SERIES	SIZE	LI/SI	TREAD DEPTH (mm)	STANDARD RIM	UTQG	
20	40	*265/40ZR20	104W XL	7.5	9.5J	420 A A	
	40	275/40ZR20	106W XL	7.5	9.5J	420 A A	
	40	285/40ZR20	108W XL	7.5	10J	420 A A	
	40	295/40ZR20	110W XL	8.0	10.5J	420 A A	
	40	305/40ZR20	112W XL	7.5	11J	420 A A	
	35	225/35ZR20	90W XL	7.5	8J	420 A A	
	35	225/35ZR20	93W XL	7.5	8J	420 A A	
	35	235/35ZR20	92W XL	7.5	8.5J	420 A A	
	35	245/35ZR20	95W XL	7.5	8.5J	420 A A	
	35	255/35ZR20	102W XL	7.5	9J	420 A A	
	35	*265/35ZR20	99W XL	7.5	9.5J	420 A A	
	35	275/35ZR20	102W XL	7.5	9.5J	420 A A	
	35	285/35ZR20	104W XL	7.5	10J	420 A A	
	35	295/35ZR20	105W XL	7.5	10.5J	420 A A	
	35	*305/35ZR20	107W XL	7.5	11J	420 A A	
	35	315/35ZR20	110W XL	7.5	11J	420 A A	
	30	225/30ZR20	85W XL	7.5	8J	420 A A	
	30	235/30ZR20	88W XL	7.5	8.5J	420 A A	
	30	245/30ZR20	90W XL	7.5	8.5J	420 A A	
	30	245/30ZR20	95Y XL	7.5	8.5J	420 A A	
	30	255/30ZR20	92W XL	7.5	9J	420 A A	
	30	275/30ZR20	97W XL	7.5	9.5J	420 A A	
	30	*285/30ZR20	99W XL	7.5	10J	420 A A	
	30	295/30ZR20	101W XL	7.5	10.5J	420 A A	
	30	305/30ZR20	103W XL	7.5	11J	420 A A	
	21	50	275/50ZR21	113W XL	8.0	8.5J	420 A A
		45	265/45ZR21	104W XL	8.0	9J	420 A A
		45	275/45ZR21	110W XL	8.0	9J	420 A A
		45	*285/45ZR21	113W XL	8.0	9.5J	420 A A
		40	245/40ZR21	100W XL	7.5	8.5J	420 A A
40		255/40ZR21	102W XL	7.5	9J	420 A A	
40		265/40ZR21	105W XL	7.5	9.5J	420 A A	
40		275/40ZR21	107W XL	7.5	9.5J	420 A A	
40		285/40ZR21	109W XL	8.0	10J	420 A A	
40		295/40ZR21	111W XL	8.0	10.5J	420 A A	
40		*315/40ZR21	115W XL	8.0	11J	420 A A	
35		245/35ZR21	96W XL	7.5	8.5J	420 A A	
35		255/35ZR21	98W XL	7.5	9J	420 A A	
35		265/35ZR21	101Y XL	7.5	9.5J	420 A A	
35		275/35ZR21	103W XL	7.5	9.5J	420 A A	
35		285/35ZR21	105W XL	8.0	10J	420 A A	
35		295/35ZR21	107W XL	8.0	10.5J	420 A A	
35		315/35ZR21	111Y XL	7.5	11J	420 A A	
30		*275/30ZR21	98W XL	7.5	9.5J	420 A A	
30		285/30ZR21	100W XL	7.5	10J	420 A A	
30		305/30ZR21	104Y XL	7.5	11J	420 A A	
30		*315/30ZR21	105Y XL	7.5	11J	420 A A	
30		*325/30ZR21	108Y XL	8.0	11.5J	420 A A	
22		45	*275/45ZR22	112W XL	8.0	9.5J	420 A A
		45	285/45R22	114V XL	8.0	9.5J	420 A A
		40	*265/40ZR22	106W XL	8.0	9.5J	420 A A
		40	275/40ZR22	107W XL	8.0	9.5J	420 A A
		40	285/40ZR22	110W XL	8.0	10J	420 A A
		35	265/35ZR22	102W XL	7.5	9.5J	420 A A
		35	275/35ZR22	104Y XL	7.5	9.5J	420 A A
	35	285/35ZR22	106W XL	7.5	10J	420 A A	
	35	315/35ZR22	111Y XL	7.5	11J	420 A A	
	35	325/35ZR22	114Y XL	8.0	11.5J	420 A A	
	30	*245/30ZR22	95W XL	7.5	8.5J	420 A A	
	30	265/30ZR22	97W XL	7.5	9.5J	420 A A	
	30	*295/30ZR22	103W XL	7.5	10.5J	420 A A	
	30	315/30ZR22	107Y XL	7.5	11J	420 A A	

UHP-RUNFLAT

R330



SELF SUPPORTING TECHNOLOGY

• WINRUN RunFlat Technology allows continuous driving for up to 80km after the tyres burst or having a puncture. RunFlat tyres use reinforced sidewalls, which enable the tyres to maintain mobility after a complete loss of air pressure.

• WINRUN RunFlat tyres should only be mounted on cars that are designed for runflat tyres and equipped with a fully operating tyres pressure warning device, such as WINRUN WARNAIR. A maximum distance of 80km/50miles and maximum speed of 80 kmh/50 mph should not be exceeded. Please refer to your car's instruction manual and follow manufacturer's advice for installation.



INCH	SERIES	SIZE	LI/SI	TREAD DEPTH (mm)	STANDARD RIM	UTQG
16	55	195/55RF16	87V	7.5	6J	420 A A
	55	205/55RF16	91V	7.5	6.5J	420 A A
	55	225/55RF16	95V	7.5	7J	420 A A
17	55	*205/55RF17	91V	7.5	6.5J	420 A A
	55	225/55ZRF17	97W	7.5	7J	420 A A
	50	205/50ZRF17	89W	7.5	6.5J	420 A A
	50	225/50ZRF17	94W	7.5	7J	420 A A
	45	205/45RF17	84V	7.5	7J	420 A A
	45	225/45ZRF17	91W	7.5	7.5J	420 A A
18	55	*255/55RF18	109H XL	8.0	8J	420 A A
	50	225/50ZRF18	95W	7.5	7J	420 A A
	50	235/50ZRF18	97W	7.5	7.5J	420 A A
	50	245/50RF18	100V	7.5	7.5J	420 A A
	45	225/45ZRF18	91W	7.5	7.5J	420 A A
	45	245/45ZRF18	96W	7.5	8J	420 A A
	40	225/40ZRF18	88W	7.5	8J	420 A A
	40	245/40ZRF18	93W	7.5	8.5J	420 A A
	40	255/40ZRF18	95W	7.5	9J	420 A A
	40	275/40ZRF18	99W	7.5	9.5J	420 A A
	35	255/35ZRF18	90W	7.5	9J	420 A A
	19	55	235/55ZRF19	101W	8.0	7.5J
50		255/50RF19	103V	8.0	8J	420 A A
45		*225/45ZRF19	92W	7.5	7.5J	420 A A
45		235/45ZRF19	95W	7.5	8J	420 A A
45		245/45ZRF19	98W	7.5	8J	420 A A
40		225/40ZRF19	89W	7.5	8J	420 A A
40		245/40ZRF19	94W	7.5	8.5J	420 A A
40		*255/40ZRF19	96W	7.5	9J	420 A A
40		275/40ZRF19	101W	7.5	9.5J	420 A A
35		255/35ZRF19	92W	7.5	9J	420 A A
35		275/35ZRF19	96W	7.5	9J	420 A A
20		45	245/45ZRF20	99W	7.5	8J
	45	255/45ZRF20	101W	7.5	8.5J	420 A A
	40	245/40ZRF20	95W	7.5	8.5J	420 A A
	40	275/40ZRF20	102W	8.0	9.5J	420 A A
	35	*245/35ZRF20	95W XL	7.5	8.5J	420 A A
	35	275/35ZRF20	98W	7.5	9.5J	420 A A
	35	315/35ZRF20	106W	8.0	11J	420 A A
	30	*275/30ZRF20	97W XL	7.5	9.5J	420 A A

* Available in 2022/2023 X. Extra Load

R350



- Advanced low noise light truck pattern
- Extra strong shoulder and sidewall design improve the carrying capacity
- Advanced silica compound
- Excellent performance in wet & dry handling



INCH	SIZE	LI/SI	PR	TYPE	TREAD DEPTH (mm)	STANDARD RIM
13	* 165R13C	91/89R	6	T/L	8.0	4.5J
	185R14C	102/100R	8	T/L	8.7	5.5J
14	195R14C	106/104R	8	T/L	8.7	5.5J
	205R14C	109/107R	8	T/L	8.7	6J
	* 165/70R14C	89/87R	6	T/L	8.0	5J
	* 175/70R14C	95/93T	6	T/L	8.0	5J
15	175/65R14C	90/88T	6	T/L	8.0	5J
	195R15C	107/105N	8	T/L	8.7	5.5J
	195/70R15C	104/102R	8	T/L	8.7	6J
	205/70R15C	106/104R	8	T/L	8.7	6J
	215/70R15C	109/107R	8	T/L	8.7	6.5J
	225/70R15C	112/110R	8	T/L	8.7	6.5J
	205/65R15C	102/100T	6	T/L	8.7	6J
	215/65R15C	104/102R	6	T/L	8.7	6.5
16	* 195/60R16C	99/97H	6	T/L	8.7	6J
	* 215/60R16C	108/106T	8	T/L	8.7	6.5J
	195/65R16C	100/98T	6	T/L	8.7	6J
	195/65R16C	104/102T	8	T/L	8.7	6J
	205/65R16C	107/105T	8	T/L	8.7	6J
	215/65R16C	106/104R	6	T/L	8.7	6.5J
	215/65R16C	109/107R	8	T/L	8.7	6.5J
	225/65R16C	112/110R	8	T/L	8.7	6.5J
	235/65R16C	115/113T	8	T/L	8.7	7J
	215/70R16C	108/106T	6	T/L	8.7	6.5J
	185/75R16C	104/102R	8	T/L	8.7	5J
	195/75R16C	107/105R	8	T/L	8.7	5.5J
	205/75R16C	110/108R	8	T/L	8.7	5.5J
17	215/75R16C	113/111R	8	T/L	8.7	6J
	215/75R16C	116/114R	10	T/L	8.7	6J
	225/75R16C	121/120R	10	T/L	9.5	6J
	* 225/55R17C	109/107H	8	T/L	8.7	7J
	* 235/60R17C	117/115R	10	T/L	8.7	7J

* Available in 2022/2023

Maxclaw H/T2



- 3 centric ribs design provides excellent performance on wet and dry roads
- Big and wide tread for tires shoulder
- 4 main grooves enable extra drainage
- Wide-tread design offers extra contact area



INCH	SERIES	SIZE	LI/SI	TREAD DEPTH (mm)	STANDARD RIM	UTQG
15	75	235/75R15	109T XL	8.5	6.5J	500 A A
	75	*LT235/75R15 C	104/101S	9.2	6.5J	—
16	60	235/60R16	100H	8.5	7J	500 A A
	65	215/65R16	98H	8.5	6.5J	500 A A
	70	205/70R16	97T	8.5	6J	500 A A
	70	*215/70R16	100T	8.5	6.5J	500 A A
	70	*225/70R16	103T	8.5	6.5J	500 A A
	70	235/70R16	106T	8.5	7J	500 A A
	70	245/70R16	111T XL	8.5	7J	500 A A
	70	255/70R16	111T	8.5	7.5J	500 A A
	70	265/70R16	112T	8.5	8J	500 A A
	70	275/70R16	114T	8.5	8J	500 A A
	75	LT225/75R16 E	115/112S	9.2	6J	—
75	LT245/75R16 E	120/116S	9.2	7J	—	
75	*LT265/75R16 E	123/120S	10.5	7.5J	—	
17	75	*245/75R16	111T	8.5	7J	500 A A
	75	*265/75R16	116T	8.5	7.5J	500 A A
	60	225/60R17	99H	8.5	7.5J	500 A A
	60	255/60R17	106H	8.5	7.5J	500 A A
	65	225/65R17	102T	8.5	6.5J	500 A A
	65	235/65R17	108V XL	8.5	7J	500 A A
	65	245/65R17	111T XL	8.5	7J	500 A A
	65	265/65R17	112T	8.5	8J	500 A A
	65	285/65R17	116H	8.5	8.5J	500 A A
	70	245/70R17	110T	8.5	7J	500 A A
	70	265/70R17	115T	8.5	8J	500 A A
75	*LT245/75R17 E	121/118S	10.5	7J	—	
18	55	255/55R18	109V XL	8.5	8J	500 A A
	60	225/60R18	104V XL	8.5	6.5J	500 A A
	60	235/60R18	107V XL	8.5	7J	500 A A
	60	245/60R18	105H	8.5	7J	500 A A
	60	*255/60R18	112H XL	8.5	8J	500 A A
	60	265/60R18	110H	8.5	8J	500 A A
	60	285/60R18	116H	8.8	8.5J	500 A A
	65	235/65R18	106H	8.5	7J	500 A A
	65	265/65R18	114H	8.5	8J	500 A A
	65	275/65R18	116T	8.5	8J	500 A A
19	70	255/70R18	113T	8.5	7.5J	500 A A
	70	*265/70R18	116T	8.8	8J	500 A A
	55	245/55R19	103V	8.5	7.5J	500 A A
20	60	255/60R19	109H	8.5	7.5J	500 A A
	50	285/50R20	116V XL	8.5	9J	500 A A
	55	235/55R20	102V	8.5	7.5J	500 A A
	55	255/55R20	110V XL	8.5	8J	500 A A
	55	275/55R20	117H XL	8.5	8.5J	500 A A
60	275/60R20	115H	8.8	8J	500 A A	

* Available in 2022/2023 XL Extra Load

Maxclaw A/T

Premium All-Terrain



- Tread and special shoulder protection design offer excellent All-Terrain traction
- Strong and conformable tire casing improves the stability and handling capability for off-road riding
- Advanced and professional silicon compound pattern design

**SUITABLE FOR SUV
AND 4X4 OFF-ROAD VEHICLE**

INCH	SERIES	SIZE	LI/SI	TREAD DEPTH (mm)	STANDARD RIM	UTQG
14	75	LT215/75R14 D	104/101S	10.5	6J	—
	70	175/70R14	88H XL	8.5	5J	500 A A
15	75	31*10.5R15LT C	109S	11.0	8.5J	—
	75	LT215/75R15 D	106/103S	10.5	6J	—
	75	*LT225/75R15 D	108/104S	11.0	6J	—
	75	*LT235/75R15 D	110/107S	11.0	6.5J	—
	75	235/75R15	105T	9.5	6.5J	500 A A
	70	205/70R15	96T	8.5	6J	500 A A
	70	265/70R15	112T	9.5	8J	500 A A
16	65	205/65R15	94H	8.5	6J	500 A A
	60	205/60R15	91H	8.5	6J	500 A A
	85	*LT235/85R16 E	120/116S	11.0	6.5J	—
	75	LT225/75R16 E	115/112S	11.0	6J	—
	75	LT245/75R16 E	120/116S	11.0	7J	—
	75	*LT265/75R16 E	123/120S	12.0	7.5J	—
	75	*LT285/75R16 E	126/123S	12.0	8J	—
	70	215/70R16	100T	9.5	6.5J	500 A A
	70	225/70R16	103T	9.5	6.5J	500 A A
	70	235/70R16	106T	9.5	7J	500 A A
	70	245/70R16	111T XL	9.5	7J	500 A A
	70	255/70R16	111T	9.5	7.5J	500 A A
	70	265/70R16	112T	9.5	8J	500 A A
60	205/60R16	92H	8.5	6J	500 A A	
17	75	*LT245/75R17 E	121/118S	12.0	7J	—
	70	225/70R17	108T XL	9.5	6.5J	500 A A
	70	265/70R17	115T	9.5	8J	500 A A
	70	*LT265/70R17 E	121/118S	12.0	8J	—
	70	LT275/70R17 E	121/118S	12.0	8J	—
	65	*225/65R17	102T	8.5	6.5J	500 A A
	65	*235/65R17	104T	9.5	7J	500 A A
	65	245/65R17	111T XL	9.5	7J	500 A A
	65	265/65R17	112T	9.5	8J	500 A A
	65	275/65R17	115T	9.5	8J	500 A A
18	70	*265/70R18	116T	9.5	8J	500 A A
	70	LT275/70R18 E	125/122S	12.0	8J	—
	65	*275/65R18	116T	9.5	8J	500 A A
	65	LT285/65R18 E	125/122S	12.0	8.5J	—
	60	265/60R18	110H	9.5	8J	500 A A
55	*255/55R18	109H XL	9.5	8J	500 A A	
19	55	255/55R19	111V XL	9.5	8J	500 A A
20	60	*275/60R20	115T	9.5	8J	500 A A
	55	275/55R20	117H XL	9.5	8.5J	500 A A
	50	265/50R20	111V XL	9.5	8.5J	500 A A
	50	285/50R20	116V XL	9.5	9J	500 A A
	45	*275/45R20	110V XL	9.5	9J	500 A A

* Available in 2022/2023 XL Extra Load

MT305



- Extra strong shoulder for extreme terrain usage
- Heavy-duty sidewall prevent puncture or damage on off-Road riding

INCH	SIZE	LI/SI	PR	TYPE	TREAD DEPTH (mm)	STANDARD RIM
15	30*9.50R15LT C	104Q	6	T/L	12.3	7.5J
	31*10.50R15LT C	109Q	6	T/L	12.3	8.5J
	32*11.50R15LT C	113Q	6	T/L	12.3	9.0J
	33*12.50R15LT C	108Q	6	T/L	14.8	10.0J
	*35*12.50R15LT C	113Q	6	T/L	14.8	10.0J
16	*LT265/70R16 D	117/114Q	8	T/L	12.3	8.0J
	LT245/75R16 E	120/116Q	10	T/L	12.3	7.0J
	LT265/75R16 E	123/120Q	10	T/L	12.3	7.5J
	LT285/75R16 E	126/123Q	10	T/L	12.3	8.0J
17	LT265/65R17 D	116/113Q	8	T/L	12.3	8.0J
	LT265/70R17 D	118/115Q	8	T/L	12.3	8.0J
	LT285/70R17 D	121/118Q	8	T/L	12.3	8.5J
	LT295/70R17 E	121/118Q	10	T/L	14.8	8.5J
18	35*12.50R17LT	121Q	10	T/L	16.5	10.0J
	33*12.50R18LT	118Q	10	T/L	16.5	10.0J
18	35*12.50R18LT	123Q	8	T/L	16.5	10.0J
	LT275/65R20 E	126/123Q	10	T/L	14.8	8.0J
20	33*12.50R20LT	114Q	10	T/L	16.5	10.0J
	35*12.50R20LT	121Q	10	T/L	16.5	10.0J
	*37*13.50R20LT	127Q	10	T/L	16.5	11.0J
22	33*12.50R22LT	109Q	10	T/L	14.8	10.0J
	35*12.50R22LT	117Q	10	T/L	16.5	10.0J
	*37*13.50R22LT	123Q	10	T/L	16.5	11.0J
24	*37*13.50R24LT	120Q	10	T/L	16.5	11.0J

* Available in 2022/2023



Maxclaw H/T



- 3 centric ribs design provides excellent performance on wet and dry roads
- Big and wide tread for tires shoulder
- 4 main grooves enable extra drainage
- Wide-tread design offers extra contact area



INCH	SERIES	SIZE	LI/SI	TREAD DEPTH (mm)	STANDARD RIM	UTQG	
16	85	LT215/85R16 D	110/107S	11.6	6J	—	
	85	LT215/85R16 E	115/112S	11.6	6J	—	
	75	LT225/75R16 E	115/112S	11.6	6J	—	
	75	LT245/75R16 E	120/116S	11.6	7J	—	
	75	LT265/75R16 E	123/120S	12.4	71/2J	—	
17	80	LT235/80R17 E	120/117S	11.6	61/2J	—	
	70	LT245/70R17 E	119/116S	11.5	7J	—	
	70	LT265/70R17 E	121/118S	12.4	8J	—	
15	75	235/75R15	105T	9.2	6.5J	500 A B	
	75	235/75R15	109T XL	9.2	6.5J	500 A B	
16	70	215/70R16	100T	9.2	6.5J	500 A B	
	70	225/70R16	103T	9.2	6.5J	500 A B	
	70	235/70R16	106T	9.2	7J	500 A B	
	70	245/70R16	107T	9.2	7J	500 A B	
	70	245/70R16	111T XL	9.2	7J	500 A B	
	70	255/70R16	111T	10.0	7.5J	500 A B	
	70	265/70R16	112T	10.0	8J	500 A B	
	65	215/65R16	98T	9.2	6.5J	500 A B	
	65	235/65R16	103T	9.2	7J	500 A B	
	17	70	245/70R17	110T	9.2	7J	500 A B
70		265/70R17	115T	10.0	8J	500 A B	
65		225/65R17	102T	8.5	6.5J	500 A B	
65		235/65R17	104T	9.2	7J	500 A B	
65		245/65R17	107T	9.2	7J	500 A B	
65		245/65R17	111T XL	9.2	7J	500 A B	
65		255/65R17	110T	10.0	7.5J	500 A B	
65		265/65R17	112T	10.4	8J	500 A B	
18		70	255/70R18	113T	10.0	7.5J	500 A B
		70	265/70R18	116T	10.0	8J	500 A B
	65	235/65R18	106T	10.0	7J	500 A B	
	65	265/65R18	114T	10.0	8J	500 A B	
	65	275/65R18	116T	10.0	8J	500 A B	
20	60	275/60R20	115T	10.0	8J	500 A B	

KF997



- Extra strong shoulder improves the performance
- V-shaped tread design and two big grooves improve the handling on wet roads
- Sport pattern design for high-speed driving performance



INCH	SERIES	SIZE	LI/SI	TREAD DEPTH (mm)	STANDARD RIM	UTQG
18	60	245/60R18	105H	9.5	7J	420 A A
	60	265/60R18	110H	9.5	8J	420 A A
	60	285/60R18	116H	9.5	8.5J	420 A A
	55	255/55R18	109V XL	9.0	8J	420 A A
20	55	275/55R20	117H XL	8.8	8.5J	420 A A
	50	265/50R20	111V XL	9.0	8.5J	420 A A
	50	285/50R20	112V	8.8	9J	420 A A
	45	275/45ZR20	110W XL	8.0	9J	420 A A
22	45	285/45R22	114V XL	9.0	9.5J	420 A A
	45	305/45R22	118V XL	8.0	10J	420 A A
	40	265/40R22	106V XL	9.0	9.5J	420 A A
	40	305/40R22	114V XL	9.0	11J	420 A A
	35	265/35R22	102V XL	8.0	9.5J	420 A A
	35	285/35ZR22	106W XL	8.8	10J	420 A A
	30	225/30ZR22	87W XL	8.0	8J	420 A A
	30	235/30ZR22	90W XL	8.0	8.5J	420 A A
24	30	255/30ZR22	95W XL	8.0	9J	420 A A
	35	295/35R24	110V XL	8.8	10.5J	420 A A
	35	305/35R24	112V XL	8.0	11J	420 A A
	30	245/30ZR24	94W XL	8.0	8.5J	420 A A
	30	255/30ZR24	97W XL	8.0	9J	420 A A
	30	275/30ZR24	101W XL	8.8	9.5J	420 A A
26	25	275/25ZR24	95W XL	8.8	10J	420 A A
	30	255/30ZR26	100W XL	9.0	9J	420 A A
	30	295/30ZR26	107W XL	8.8	10.5J	420 A A
	30	305/30ZR26	109W XL	8.8	11J	420 A A
	25	275/25ZR26	100W XL	9.0	10J	420 A A

WINTERCROSS WR12



- Special asymmetric and sawtooth WR12 winter pattern improves the driving and handling.
- 3 circumference grooves + V type grooves provide the excellent braking and performance in wet handling.
- Strong edges and corners shoulder improved the driving in wet and anti-skidding.



INCH	SERIES	SIZE	LI/SI	TREAD DEPTH (mm)	STANDARD RIM	STUDDABLE RIM	
13	65	155/65R13	73Q	9.0	4.5	NO	
	65	165/65R13	77Q	9.0	5.0	NO	
	70	165/70R13	83Q XL	9.0	5.0	NO	
	70	175/70R13	82Q	9.0	5.0	NO	
14	70	165/70R14	85Q XL	9.0	5.0	NO	
	70	175/70R14	88Q XL	9.0	5.0	NO	
	70	185/70R14	88Q	9.0	5.5	NO	
	65	155/65R14	75Q	9.0	4.5	NO	
	65	175/65R14	82Q	9.0	5.0	NO	
	65	185/65R14	90Q XL	9.0	5.5	NO	
	60	165/60R14	75Q	9.0	5.0	NO	
	60	185/60R14	82Q	9.0	5.5	NO	
15	70	205/70R15	96Q	9.3	6.0	NO	
	65	175/65R15	84Q	9.3	5.0	NO	
	65	185/65R15	88Q	9.3	5.5	NO	
	65	195/65R15	91Q	9.3	6.0	NO	
	65	205/65R15	94Q	9.3	6.0	NO	
	60	185/60R15	84Q	9.3	5.5	NO	
	60	195/60R15	88Q	9.3	6.0	NO	
	55	185/55R15	86Q XL	9.3	6.0	NO	
16	70	215/70R16	100Q	9.3	6.5	NO	
	65	205/65R16	95Q	9.3	6.0	NO	
	65	215/65R16	98Q	9.3	6.5	NO	
	60	195/60R16	89Q	9.3	6.0	NO	
	60	205/60R16	92Q	9.3	6.0	NO	
	60	215/60R16	99Q XL	9.3	6.5	NO	
	60	225/60R16	98Q	9.3	6.5	NO	
	55	205/55R16	91S	9.3	6.5	NO	
	55	215/55R16	97Q XL	9.3	7.0	NO	
	55	225/55R16	99Q XL	9.3	7.0	NO	
	17	65	225/65R17	102S	9.3	6.5	NO
		65	235/65R17	104S	9.3	7.0	NO
65		245/65R17	111S XL	9.3	7.0	NO	
65		265/65R17	112S	9.3	8.0	NO	
60		215/60R17	96S	9.3	6.5	NO	
60		225/60R17	103S XL	9.3	6.5	NO	
55		215/55R17	94S	9.3	7.0	NO	
55		225/55R17	97S	9.3	7.0	NO	
55		235/55R17	103S XL	9.3	7.5	NO	
50		215/50R17	95S XL	9.3	7.0	NO	
50		225/50R17	98S XL	9.3	7.0	NO	
45		235/45R17	97S XL	9.3	8.0	NO	
18		60	225/60R18	104S XL	9.3	6.5	NO
		60	235/60R18	107S XL	9.3	7.0	NO
	60	265/60R18	114S XL	9.3	8.0	NO	
	55	215/55R18	99S XL	9.3	7.0	NO	
	55	235/55R18	104S XL	9.3	7.5	NO	
	50	235/50R18	101S XL	9.3	7.5	NO	
	45	225/45R18	95S XL	9.3	7.5	NO	
	45	245/45R18	100S XL	9.3	8.0	NO	
	40	255/40R18	99S XL	9.3	9.0	NO	

XL Extra Load

Winter-max U1 WR21



- Special symmetric WR21 winter pattern provide the better grip and handling .
- Single circumference belt in the central of pattern improves the stability driving.
- Strong and width shoulder pattern piece provide lateral forces and improve traction on SNOWY and ICY roads



INCH	SERIES	SIZE	LI/SI	TREAD DEPTH (mm)	STANDARD RIM	STUDDABLE
13	70	175/70R13	82T	8.3	5.0	NO
	70	165/70R13	83T XL	8.3	5.0	NO
	70	165/70R13	79T	8.3	5.0	NO
	80	155/80R13	79T	8.3	4.5	NO
	70	155/70R13	75T	8.3	4.5	NO
14	70	175/70R14	88T XL	8.3	5.0	NO
	60	185/60R14	82T	8.3	5.5	NO
	55	185/55R14	80T	8.3	6.0	NO
	60	185/60R14	86T XL	8.3	5.5	NO
	70	185/70R14	88T	8.3	5.5	NO
	65	185/65R14	86T	8.3	5.5	NO
	65	175/65R14	86T XL	8.3	5.0	NO
	65	175/65R14	82T	8.3	5.0	NO
	70	175/70R14	84T	8.3	5.0	NO
	70	165/70R14	85T XL	8.3	5.0	NO
15	70	165/70R14	81T	8.3	5.0	NO
	60	185/60R15	84T	8.3	5.5	NO
	60	185/60R15	88T XL	8.3	5.5	NO
	55	185/55R15	86H XL	8.3	6.0	NO
	65	205/65R15	99T XL	8.8	6.0	NO
	60	195/60R15	88T	8.3	6.0	NO
	65	215/65R15	96H	8.8	6.5	NO
	65	205/65R15	94T	8.8	6.0	NO
	65	195/65R15	95T XL	8.3	6.0	NO
	65	195/65R15	91H	8.3	6.0	NO
16	65	195/65R15	91T	8.3	6.0	NO
	65	185/65R15	88T	8.3	5.5	NO
	55	205/55R16	91T	8.8	6.5	NO
	65	185/65R15	88T	8.3	5.5	NO

Winter-max A1 WR22



- Advanced piece-shape Asymmetric WR22 pattern design with special formula for ICE and SNOW road conditions.
- Three longitudinal grooves designed on tread improve slip resistant performance on snowy roads in winter.
- Herring bone pattern improves strong ice breaking and water drainage performance, large areas contacting grounds will ensure the characteristics and enhance the traction on icy and snowy roads.



INCH	SERIES	SIZE	LI/SI	TREAD DEPTH (mm)	STANDARD RIM	STUDDABLE
15	50	195/50R15	82H	8.3	6.0	NO
	55	195/55R15	85H	8.3	6.0	NO
16	55	215/55R16	97H XL	8.8	7.0	NO
	60	225/60R16	102H XL	8.8	6.5	NO
	55	225/55R16	99H XL	8.8	7.0	NO
	55	205/55R16	91H	8.8	6.5	NO
	55	195/55R16	87H	8.3	6.0	NO
	60	235/60R16	100H	8.8	7.0	NO
17	60	215/60R16	99H XL	8.8	6.5	NO
	60	205/60R16	96H XL	8.8	6.0	NO
	65	215/65R16	98H	8.8	6.5	NO
	55	205/55R17	95V XL	8.8	6.5	NO
	45	235/45R17	97V XL	8.3	8.0	NO
	45	215/45R17	91V XL	8.3	7.0	NO
	50	215/50R17	95V XL	8.8	7.0	NO
	50	205/50R17	93V XL	8.8	6.5	NO
	45	225/45R17	94V XL	8.3	7.5	NO
	50	225/50R17	98V XL	8.8	7.0	NO
	55	235/55R17	103V XL	8.8	7.5	NO
18	55	225/55R17	101V XL	8.8	7.0	NO
	55	215/55R17	98V XL	8.8	7.0	NO
	45	235/45R18	98V XL	8.3	8.0	NO
	50	225/50R18	99V XL	8.8	7.0	NO
	55	255/55R18	109V XL	8.8	8.0	NO
	40	245/40R18	97V XL	8.3	8.5	NO
19	40	235/40R18	95V XL	8.3	8.5	NO
	40	225/40R18	92V XL	8.3	8.0	NO
	55	235/55R19	105V XL	8.8	7.5	NO
	35	255/35R19	96V XL	8.3	9.0	NO
	35	245/35R19	93V XL	8.3	8.5	NO
	35	235/35R19	91V XL	8.3	8.5	NO
	35	225/35R19	88V XL	8.3	8.0	NO
	45	245/45R19	102V XL	8.3	8.0	NO
	40	255/40R19	100V XL	8.3	9.0	NO
	20	35	315/35R20	110V XL	8.3	11.0
40		275/40R20	106V XL	8.3	9.5	NO
40		245/40R20	99V XL	8.3	8.5	NO
50		285/50R20	116H XL	8.8	9.0	NO
21	40	295/40R21	111V XL	8.3	10.5	NO

Winter-max S1 WR60



- Special symmetric WR60 winter pattern designed for ICY and SNOWY road conditions
- With Optimized nail hole arrangement, inlaid nail anti-skid technology and super-strong grip
- Single-Oriented pattern design provide effective water evacuation and exceptional wet performance in wet land.



INCH	SERIES	SIZE	LI/SI	TREAD DEPTH (mm)	STANDARD RIM	STUDDABLE
13	80	155/80R13	83Q XL	9.4	4.5	YES-TSMI-11
	70	175/70R13	82T	9.4	5.0	YES-TSMI-11
14	65	175/65R14	86T XL	9.4	5.0	YES-TSMI-11
15	65	195/65R15	91T	9.4	6.0	YES-TSMI-11
	65	195/65R15	95T XL	9.4	6.0	YES-TSMI-11
16	55	205/55R16	94T XL	9.4	6.5	YES-TSMI-11
17	45	225/45R17	94H XL	9.4	7.5	YES-TSMI-11
	50	225/50R17	98H XL	9.4	7.0	YES-TSMI-11
	55	225/55R17	101H XL	9.4	7.0	YES-TSMI-11
	65	235/65R17	104T	9.4	7.0	YES-TSMI-11
	65	225/65R17	102T	9.4	6.5	YES-TSMI-11
18	60	235/60R18	107H XL	9.4	7.0	YES-TSMI-11
	55	225/55R18	102H XL	9.4	7.0	YES-TSMI-11
	45	225/45R18	95H XL	9.4	7.5	YES-TSMI-11
20	40	225/40R18	92H XL	9.4	8.0	YES-TSMI-11
	55	275/55R20	117H XL	9.4	8.5	YES-TSMI-11

Ice Rooter WR66



- Special symmetric WR66 winter pattern designed for ICY and SNOWY road conditions.
- With Optimized nail hole arrangement, inlaid nail anti-skid technology and super-strong grip.
- Super long V type grooves provide the better drainage and anti-skidding.



INCH	SERIES	SIZE	LI/SI	TREAD DEPTH (mm)	STANDARD RIM	STUDDABLE
14	70	165/70R14	81T	9.4	5.0	YES-TSMI-11
	70	175/70R14	88T XL	9.4	5.0	YES-TSMI-11
	70	185/70R14	88T	9.4	5.5	YES-TSMI-11
	65	185/65R14	86T	9.4	5.5	YES-TSMI-11
15	65	185/65R15	88H	9.4	5.5	YES-TSMI-11
	55	195/55R15	85H	9.4	6.0	YES-TSMI-11
	60	195/60R15	88H	9.4	6.0	YES-TSMI-11
16	55	215/55R16	97H XL	9.4	7.0	YES-TSMI-11
	60	205/60R16	92H	9.4	6.0	YES-TSMI-11
	60	215/60R16	99T XL	9.4	6.5	YES-TSMI-11
	65	215/65R16	102T XL	9.4	6.5	YES-TSMI-11
17	55	215/55R17	98H XL	9.4	7.0	YES-TSMI-11
	55	235/55R17	103H XL	9.4	7.5	YES-TSMI-11
	60	215/60R17	96H	9.4	6.5	YES-TSMI-11
	60	225/60R17	103H XL	9.4	6.5	YES-TSMI-11
	65	265/65 R17	112T	9.4	8.0	YES-TSMI-11
18	70	265/70 R17	115T	9.4	8.0	YES-TSMI-11
	50	235/50R18	101H XL	9.4	7.5	YES-TSMI-11
	45	235/45R18	98V XL	9.4	8.0	YES-TSMI-11
	60	225/60R18	104H XL	9.4	6.5	YES-TSMI-11
19	60	265/60R18	114H XL	9.4	8.0	YES-TSMI-11
	55	235/55R19	105H XL	9.4	7.5	YES-TSMI-11
	45	245/45R19	102V XL	9.4	8.0	YES-TSMI-11
	40	245/40R19	98V XL	9.4	8.5	YES-TSMI-11
	35	235/35R19	91V XL	9.4	8.5	YES-TSMI-11
20	55	235/55R20	105H XL	9.4	7.5	YES-TSMI-11
	55	255/55R20	110H XL	9.4	8.0	YES-TSMI-11
	50	265/50R20	111H XL	9.4	8.5	YES-TSMI-11
	45	235/45R20	100V XL	9.4	8.0	YES-TSMI-11
	45	245/45R20	103V XL	9.4	8.0	YES-TSMI-11